



(51) International Patent Classification:

H01J 27/02 (2006.01) H01J 37/317 (2006.01)
H01J 37/08 (2006.01)

(21) International Application Number:

PCT/US2022/044861

(22) International Filing Date:

27 September 2022 (27.09.2022)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

17/510,996 26 October 2021 (26.10.2021) US

(71) Applicant: **APPLIED MATERIALS, INC.** [US/US];
3050 Bowers Avenue, Santa Clara, California 95054-3299
(US).

(72) Inventors: **LIKHANSKII, Alexandre**; c/o Applied Materials, Inc., 35 Dory Road, Gloucester, Massachusetts 01930 (US). **SCHEUER, Jay T.**; c/o Applied Materials, Inc., 35 Dory Road, Gloucester, Massachusetts 01930 (US). **MAHALINGAM, Sudhakar**; c/o Applied Materials, Inc., 35 Dory Road, Gloucester, Massachusetts 01930 (US). **CLAY, Nevin**; c/o Applied Materials, Inc., 35 Dory Road, Gloucester, Massachusetts 01930 (US).

(74) Agent: **FRAME, Robert C.** et al.; NIELDS, LEMACK & FRAME, LLC, 176 E. Main Street, Suite 5, Westboro, Massachusetts 01581 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) Title: MISMATCHED OPTICS FOR ANGULAR CONTROL OF EXTRACTED ION BEAM

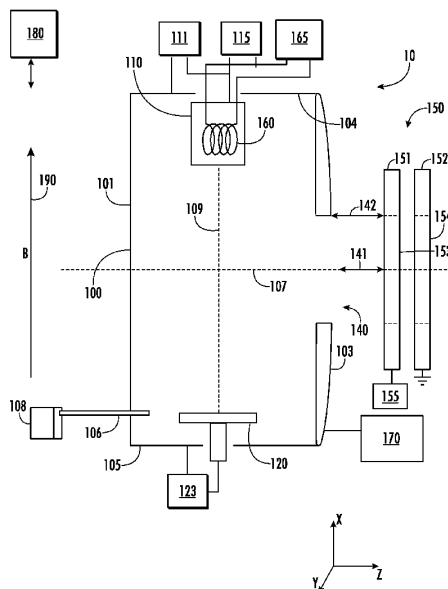


FIG. 1

(57) Abstract: An ion source capable of extracting a ribbon ion beam with improved vertical angular uniformity is disclosed. The extraction plate and extraction optics are designed such that there is at least one non-uniform gap between adjacent components. A non-uniform gap may be effective in reducing angular spread non-uniformity of the extracted ribbon ion beam. Specifically, for a given gap in the Z direction, ions extracted from regions with lower plasma density may have more vertical angular spread. A larger gap in the Z direction between components in this region may make the vertical angular spread closer to the vertical angular spread of ions extracted from regions with higher plasma density. The non-uniform gap may be created by having an extraction plate that is flat or curved and electrodes that are flat, convex or concave.

Published:

— with international search report (Art. 21(3))