

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
31 October 2024 (31.10.2024)



(10) International Publication Number
WO 2024/223664 A1

(51) International Patent Classification:

F16K 37/00 (2006.01) *F16K 35/02* (2006.01)
F16K 31/50 (2006.01) *F16K 35/06* (2006.01)
F16K 31/53 (2006.01) *F24D 19/10* (2006.01)
F16K 31/05 (2006.01) *G05D 7/01* (2006.01)
F16K 1/52 (2006.01)

(21) International Application Number:

PCT/EP2024/061253

(22) International Filing Date:

24 April 2024 (24.04.2024)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

23169997.6 26 April 2023 (26.04.2023) EP

(71) Applicant: **IMI HYDRONIC ENGINEERING INTERNATIONAL SA** [CH/CH]; Lake Geneva business Park, Route de Crassier 19, 1262 Eysins (CH).

(72) Inventor: **VOLOVEC, Peter**; Zupelevac 58, 8258 Kapele (SD).

(74) Agent: **ZACCO SWEDEN AB**; Box 5581, Löjtnantsgatan 21, 114 85 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available):

AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available):

ARIPO (BW, CV, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: A VALVE ARRANGEMENT WITH IMPROVED BALANCING FUNCTIONALITY

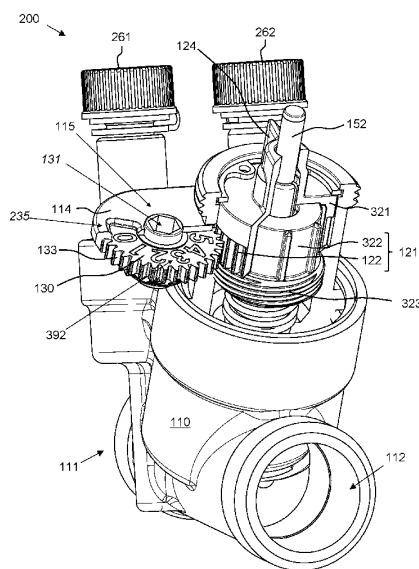


Figure 3C

(57) Abstract: A valve arrangement (100, 200) for controlling fluid flow, comprising: a valve body (110) having a valve inlet (111) and a valve outlet (112); a control valve part (150) comprising a seat (113) and closing member (151) movable relative to the seat (113) for enabling a variable cross section of a passage (102) between the valve inlet (111) and the valve outlet (112) to be changed; a restriction element (121) adjustable between different positions along or around a first axis (A1), wherein the different positions restrict movement of the closing member (151) by respective amounts; and an adjustment member (130) rotatably attached to the valve body (110), wherein the adjustment member (130) is rotatable around a second axis (A2) different from the first axis (A1), and wherein the adjustment member (130) is configured to transmit rotational movement of the adjustment member (130) to the restriction element (121) such that the restriction element (121) moves between the positions along or around the first axis (A1) when the adjustment member (130) is rotated.

WO 2024/223664 A1