



- (51) International Patent Classification:
H02K 3/28 (2006.01) *H02K 7/18* (2006.01)
F03B 17/06 (2006.01) *H02K 41/06* (2006.01)
- (21) International Application Number:
PCT/EP2012/065520
- (22) International Filing Date:
8 August 2012 (08.08.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
11177068.1 10 August 2011 (10.08.2011) EP
- (71) Applicant (for all designated States except US): **OPEN-HYDRO IP LIMITED** [IE/IE]; South Dock House, Hanover Quay, Dublin 2 (IE).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **SPOONER, Edward** [GB/GB]; Field Stile, Westgate, Bishop Auckland, County Durham, Durham DL13 1SL (GB).

(74) Agent: **O'NEILL, Brian**; FRKelly, 27 Clyde Road, Dublin 4 (IE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

[Continued on next page]

(54) Title: A HYDROELECTRIC TURBINE COIL ARRANGEMENT

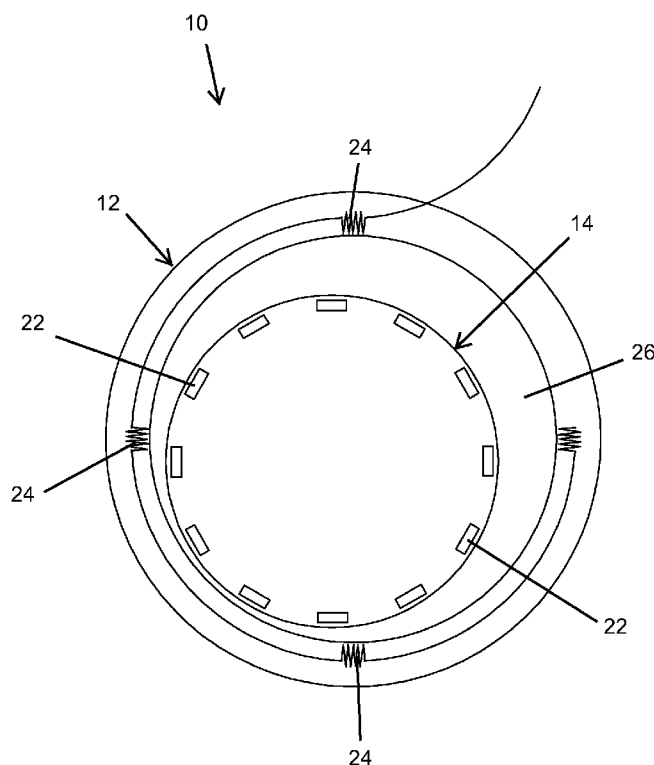


Fig. 2

(57) Abstract: The present invention provides a hydroelectric turbine for generating electricity by extracting power from the tidal flow of water through the turbine, the turbine comprising a shaftless rotor which results in the eccentric rotation of the rotor relative to the stator, which can result in uneven generation of power through differences in the spacing between rim mounted magnets and coils forming a generator of the turbine, the turbine thus employing groupings of equally spaced and serially connected coils.

WO 2013/021006 A1



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, **Published:**
ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*