



- (51) **International Patent Classification:**
E21B 19/08 (2006.01) *E21B 33/035* (2006.01)
- (21) **International Application Number:**
PCT/US2013/070670
- (22) **International Filing Date:**
19 November 2013 (19.11.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (71) **Applicant:** HALLIBURTON ENERGY SERVICES, INC. [US/US]; 10200 Bellaire Boulevard, Houston, TX 77072 (US).
- (72) **Inventors:** HARRELL, Thurman, P.; 10314 Mills Pass Drive, Houston, Texas 77070 (US). MCDANIEL, Ralph, A.; Rt. 4, Box 243-D, Duncan, OK 73533 (US).
- (74) **Agents:** ALFARO, Micaela, N. et al.; Baker Botts LLP, 910 Louisiana Street, Houston, TX 77002 (US).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

(54) **Title:** INJECTOR AND SLIP BOWL SYSTEM

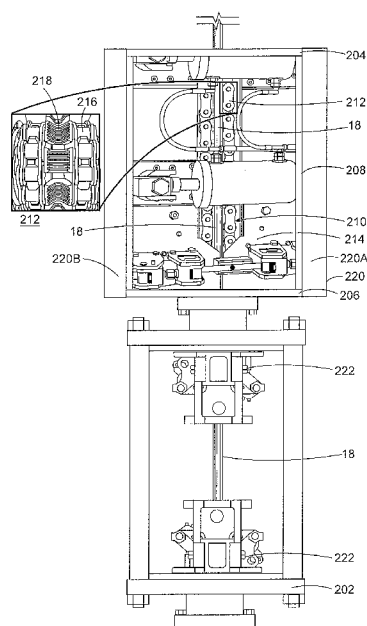


Fig. 2

(57) **Abstract:** Methods and systems for moving a tubular member in and out of a well are disclosed. An injector and slip bowl system includes an injector apparatus. The injector apparatus includes a support structure and an injector located above the support structure. The injector includes a base and a carriage extending upward from the base and coupled to the base. The injector also includes a gripper chain system mounted in the carriage. The gripper chain system includes one or more gripper chains and one or more linear beams supporting the one or more gripper chains. The injector apparatus further includes a lifting means coupled to the support structure and a slip bowl assembly coupled to the support structure and located below the injector base.