

19/03/03

2003013687

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

162162


(43) International Publication Date
2 May 2002 (02.05.2002)

PCT

(10) International Publication Number
WO 02/35660 A1

- (51) International Patent Classification⁷: **H01R 13/646**, 9/05, 13/646
- (21) International Application Number: PCT/US01/05601
- (22) International Filing Date: 22 February 2001 (22.02.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
09/695,343 24 October 2000 (24.10.2000) US
- (71) Applicant: **3M INNOVATIVE PROPERTIES COMPANY** [US/US]; Post Office Box 33427, 3M Center, Saint Paul, MN 55133-3427 (US).
- (72) Inventors: **FELDMAN, Steven**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US). **CASTIGLIONE, Joseph, N.**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US).
- (74) Agents: **McNUTT, Matthew B.**, et al.; Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: COAXIAL CONNECTOR

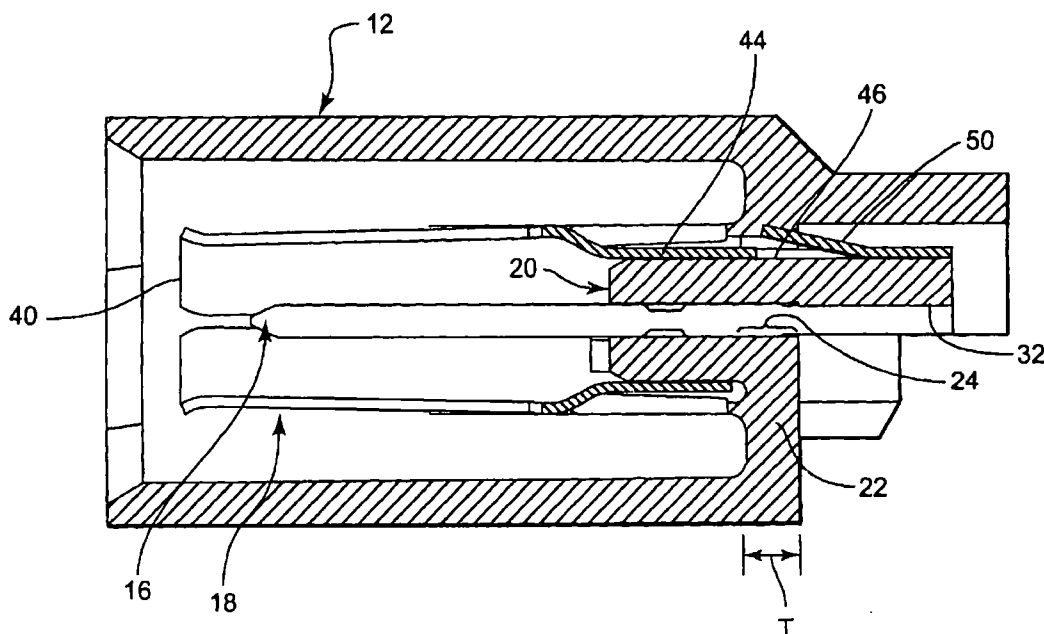

(57) Abstract: A coaxial connector assembly for attachment to a printed circuit board includes a plurality of dielectric insulators integrally formed with each other. A plurality of longitudinal signal contacts and shield tubes are positioned within and around, respectively, each of the insulators. A terminal end of each of the signal contacts and shield tubes is adapted for connecting to a printed circuit board. The connector may optionally include a housing integrally formed with the insulators.

WO 02/35660 A1



ACTION