



- (51) International Patent Classification:  
*B08B 3/00* (2006.01)
- (21) International Application Number:  
PCT/IB2011/054377
- (22) International Filing Date:  
5 October 2011 (05.10.2011)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
12/913,405 27 October 2010 (27.10.2010) US
- (71) Applicant (for all designated States except US): **LAM RESEARCH AG** [AT/AT]; SEZ-Strasse 1, A-9500 Villach (AT).
- (71) Applicant (for BZ only): **LAM RESEARCH CORPORATION** [US/US]; 4650 Cushing Parkway, Fremont, California CA-94538 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **HOHENWARTER, Karl-Heinz** [AT/AT]; Leifling 1, A-9635 Dellach/Gail (AT).
- (74) Agent: **KONTRUS, Gerhard**; c/o Lam Research AG, SEZ-Strasse 1, A-9500 Villach (AT).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: CLOSED CHAMBER FOR WAFER WET PROCESSING

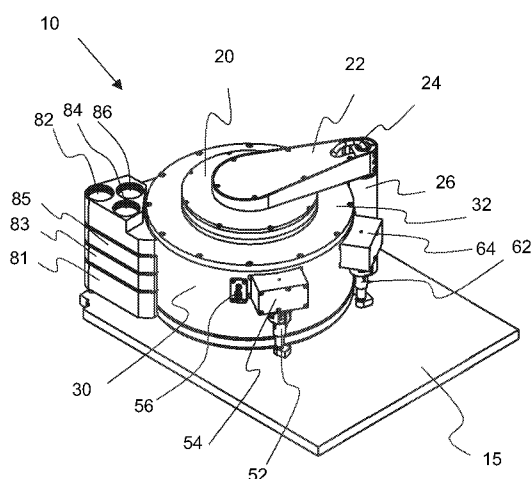


Fig. 1

(57) Abstract: An improved design for a closed chamber process module for single wafer wet processing utilizes a combination lid and gas showerhead for sealing the chamber from above. One or more media arms dispense liquid onto a wafer in the chamber. The media arms are mounted inside the chamber but are connected by a linkage that passes through the chamber wall to a drive unit mounted outside the chamber.

**Declarations under Rule 4.17:**

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

**Published:**

- *with international search report (Art. 21(3))*

**(88) Date of publication of the international search report:**  
19 July 2012