

(51) International Patent Classification:
E21B 7/128 (2006.01)(21) International Application Number:
PCT/US2012/059058(22) International Filing Date:
5 October 2012 (05.10.2012)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/543,663 5 October 2011 (05.10.2011) US
61/606,031 2 March 2012 (02.03.2012) US
61/610,805 14 March 2012 (14.03.2012) US(71) Applicant: SEAHORSE EQUIPMENT CORP [US/US];
1255 Enclave Parkway, Suite 600, Houston, TX 77077
(US).(72) Inventors: JORDAN, Travis, Randall; 1255 Enclave
Parkway, Suite 600, Houston, TX 77077 (US). KIPP,
Robert, M.; 1255 Enclave Parkway, Suite 600, Houston,
TX 77077 (US).(74) Agent: KEIRS, Christopher, D.; Wong, Cabello, Lutsch,
Rutherford & Bruculeri L.L.P., 20333 Tomball Parkway,
Suite 600, Houston, TX 77070 (US).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))
- with amended claims (Art. 19(1))

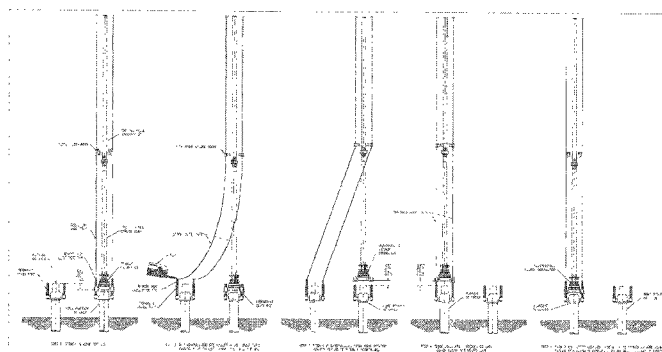
(54) Title: METHOD AND APPARATUS FOR DRILLING MULTIPLE SUBSEA WELLS FROM AN OFFSHORE PLATFORM
AT A SINGLE SITE

FIG. 8

(57) Abstract: A floating, offshore drilling and/or production platform is equipped with a rail-mounted transport system that can be positioned at a plurality of selected positions over the well bay of the vessel. The transport system can move a drilling riser with a drilling riser tensioner system and a blowout preventer from one drilling location to another without removing them from the well bay of the vessel. Using the transport system, the drilling riser is lifted just clear of a first well head and positioned over an adjacent, second well head using guidelines. The transport system may then move the upper end of the drilling riser (together with its attached tensioner and BOP) to a second drilling location. A dummy wellhead may be provided on the seafloor in order to secure the lower end of the drilling riser without removing it from the sea while production risers are being installed.