

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
21 August 2003 (21.08.2003)

PCT

(10) International Publication Number
WO 03/069168 A2

(51) International Patent Classification⁷: **F16B**

[US/US]; 4088 Gregory Drive, Doylestown, PA 18901 (US).

(21) International Application Number: PCT/US03/02703

(22) International Filing Date: 31 January 2003 (31.01.2003)

(74) Agent: **GORE, Gregory, J.**; Suite 316, 70 West Oakland Avenue, Doylestown, PA 18901 (US).

(25) Filing Language: English

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(26) Publication Language: English

(30) Priority Data:
60/354,920 11 February 2002 (11.02.2002) US

(71) Applicant (*for all designated States except US*): **PEM MANAGEMENT, INC.** [US/US]; 300 Delaware Avenue, Suite 1225, Wilmington, DE 19801 (US).


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **BRUNO, David, J.**

[Continued on next page]

(54) Title: TWO-PART SNAP-TOGETHER PANEL FASTENER

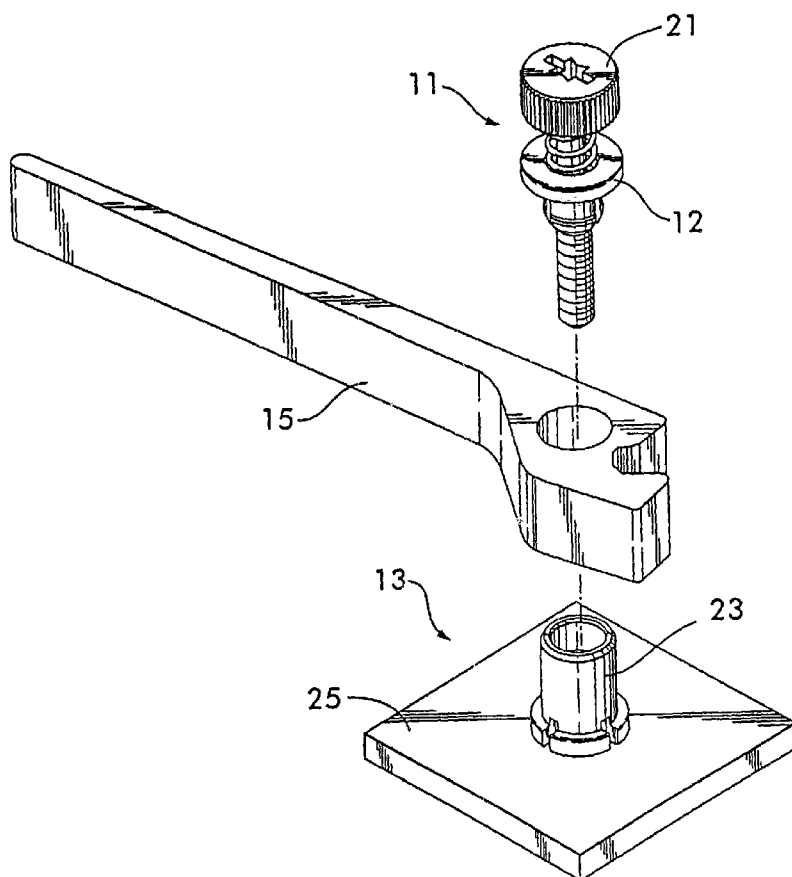

(57) Abstract: A two-part, snap-together captive panel fastener includes a ferrule portion and a screw sub-assembly which are attachable by snap fit. A locking mechanism prevents the unintended separation of the two components. The two-part structure of the present invention permits the ferrule which is preferably composed of a very hard and durable metal to be first wave-soldered to a printed circuit board with other elements of the board. Later, the screw sub-assembly can be snapped into the circuit board-mounted ferrule away for the harsh wave-soldering environment. The ferrule and screw retainer may further include cooperating outer flanges which captivate a pivoting structure such as a lever so that the panel fastener may not only be used to secure the attached panel to a sub-structure but may also affix other hardware to the panel.



WO 03/069168 A2



ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

Declaration under Rule 4.17:

— of inventorship (Rule 4.17(iv)) for US only

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.