



(51) International Patent Classification:
E21B 33/12 (2006.01) *E21B 33/127* (2006.01)

(21) International Application Number:
PCT/GB2010/001850

(22) International Filing Date:
4 October 2010 (04.10.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/573,766 5 October 2009 (05.10.2009) US

(71) Applicant (for all designated States except US): **HAL-LIBURTON ENERGY SERVICES, INC.** [US/US]; P O Box 1431, Duncan, Oklahoma 73536 (US).

(71) Applicant (for MW only): **CURTIS, Philip, Anthony** [GB/GB]; A.A. Thornton & Co., 235 High Holborn, London WC1V 7LE (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **PORTER, Jesse, C.** [US/US]; Route 1 Box 125, Duncan, OK 73533 (US). **STANDRIDGE, William, E.** [US/US]; Route 1 Box 125, Duncan, OK 73533 (US). **NEER, Adam, K.** [US/US]; 3405 Crown Oaks, Duncan, OK 73533 (US). **MARTIN, Tracy** [US/US]; 9307 Prairie Trails Drive, Spring, TX 77379 (US). **MANKE, Kevin, R.** [US/US]; Route 2 Box 92A, Marlow, OK 73055 (US).

(74) Agents: **COTTRILL, Emily, Elizabeth, Helen** et al.; A.A. Thornton & Co, 235 High Holborn, London WC1V 7LE (GB).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: INTERCHANGEABLE DRILLABLE TOOL

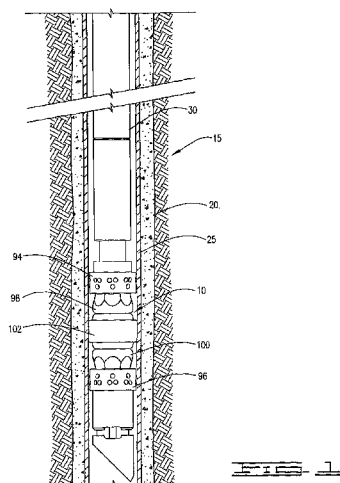

(57) Abstract: A downhole tool for use in a well has a mandrel (32) with an expandable sealing element (102) disposed thereabout. The mandrel has a head portion (62) threadedly connected thereto. A shoulder in the head portion and an upper end of the mandrel define an annular space (80). A sleeve with a bore therethrough may be positioned in the annular space. The head portion may be removed and a solid plug installed so that it fits within the annular space and so that the downhole tool will act as a bridge plug. The downhole tool has slip rings (92, 96) made up of a plurality of individual slip segments (114) that are adhesively bonded to one another at the sides thereof.