

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
23 August 2001 (23.08.2001)

PCT

(10) International Publication Number
WO 01/60488 A1

(51) International Patent Classification⁷: **B01D 3/20, 3/22**

(21) International Application Number: PCT/EP01/01814

(22) International Filing Date: 16 February 2001 (16.02.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
00200523.9 16 February 2000 (16.02.2000) EP

(71) Applicant (for all designated States except US): **SHELL INTERNATIONALE RESEARCH MAATSCHAPPIJ B.V.** [NL/NL]; Carel van Bylandtlaan 30, NL-2596 HR The Hague (NL).

3, NL-1031 CM Amsterdam (NL). **EHRENREICH-GUREJA, Charu** [DE/NL]; Badhuisweg 3, NL-1031 CM Amsterdam (NL).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BOSMANS, Bernardinus, Henricus** [NL/NL]; Badhuisweg — with international search report

[Continued on next page]

(54) Title: GAS-LIQUID CONTACT TRAY HAVING MULTIPLE DOWNCOMERS

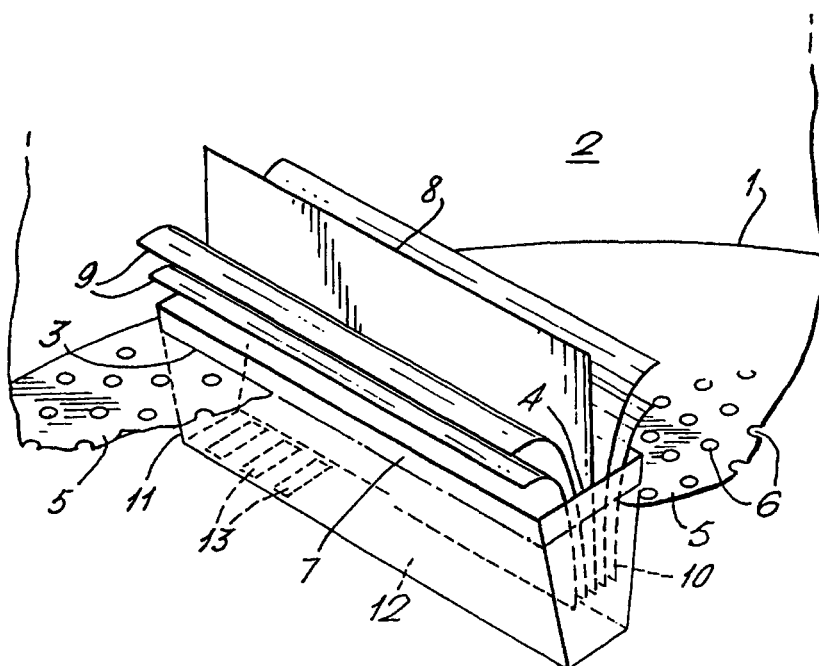

(57) Abstract: Gas-liquid contact tray comprising a bubble area and a plurality of downcomers having a downcomer opening, which downcomer openings are spaced in the bubble area, such that, when in use, a liquid enters the downcomer opening from opposite sides of the downcomer opening, wherein the downcomer opening and downcomer is provided with at least two flow directing plates, wherein each flow directing plate has an upper end which extends above the tray and is inclined towards the direction of the liquid flowing towards the downcomer opening.

WO 01/60488 A1



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.