

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
22 April 2004 (22.04.2004)

PCT

(10) International Publication Number
WO 2004/033697 A2

(51) International Patent Classification⁷: **C12P**
(21) International Application Number:
PCT/US2003/029193

(22) International Filing Date:
17 September 2003 (17.09.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/269,261 11 October 2002 (11.10.2002) US

(71) Applicant: **CATALYTIC DISTILLATION TECHNOLOGIES** [US/US]; 10100 Bay Area Boulevard, Pasadena, TX 77507 (US).

(72) Inventor: **SMITH, Lawrence, A., Jr.**; 10100 Bay Area Boulevard, Pasadena, TX 77507 (US).

(74) Agent: **JOHNSON, Kenneth, H.**; P.O. Box 630708, Houston, TX 77263 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD OF REMOVING ENTRAINED SULFURIC ACID FROM ALKYLATE BACKGROUND OF THE INVENTION

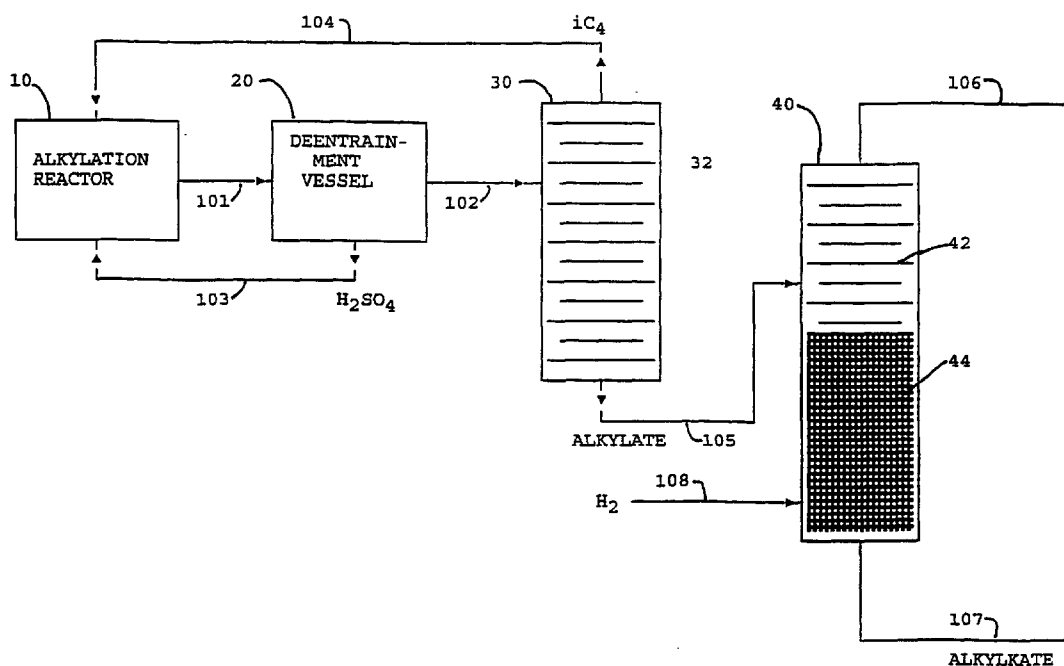

(57) Abstract: An improvement in the alkylation of olefins with isoalkanes in the presence of sulfuric acid wherein the sulfuric acid is removed from the product by a mechanical coalescer means prior to fractionation. No water wash or caustic treatment is required. Any sulfonates or sulfonic esters are removed by hydrosulfurization or decomposition catalyst in a separate reactor or in either the deisobutanizer (DIB) or debutanizer (DB) column.

WO 2004/033697 A2