



G00002

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



162162

(43) International Publication Date
17 January 2002 (17.01.2002)


PCT

(10) International Publication Number
WO 02/05081 A1

- (51) International Patent Classification⁷: **G06F 3/033** (71) Applicant and
(72) Inventor: **IRVINE, Nes, Stewart** [GB/GB]; 16 Soller-
(21) International Application Number: **PCT/GB01/01978** shott West, Letchworth, Herts SG6 3PX (GB).
(22) International Filing Date: **3 May 2001 (03.05.2001)** (81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
(25) Filing Language: **English** CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK,
(26) Publication Language: **English** LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX,
MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL,
TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
(30) Priority Data:
0011321.7 11 May 2000 (11.05.2000) GB
0011370.4 12 May 2000 (12.05.2000) GB
0011441.3 12 May 2000 (12.05.2000) GB
0012582.3 24 May 2000 (24.05.2000) GB
0026891.2 1 November 2000 (01.11.2000) GB
0028097.4 20 November 2000 (20.11.2000) GB
0028693.0 27 November 2000 (27.11.2000) GB
0029148.4 30 November 2000 (30.11.2000) GB
0031164.7 21 December 2000 (21.12.2000) GB
0031680.2 27 December 2000 (27.12.2000) GB
(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,
CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
Published:
— with international search report

[Continued on next page]

(54) Title: **ZEROCLICK**

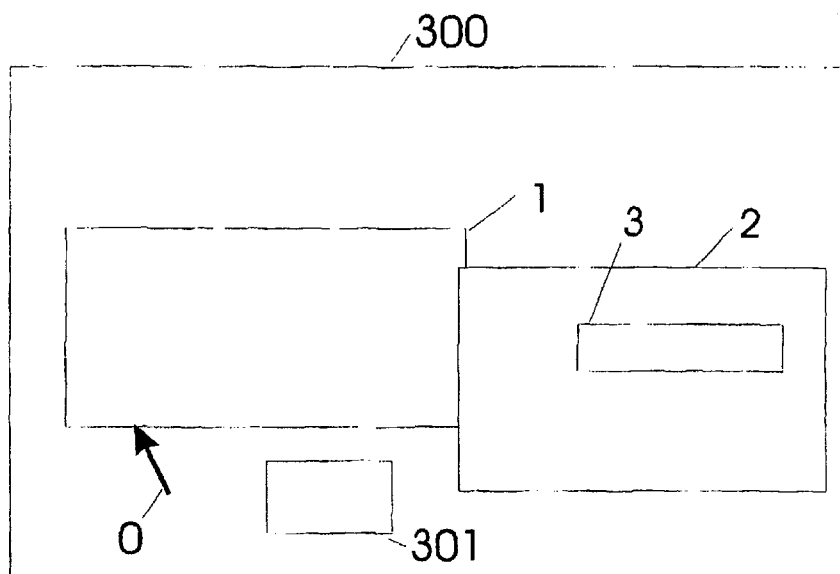

(57) Abstract: A GUI interface, a method of programming a GUI interface, and an apparatus which enables functions of controls in the GUI to be activated by a movement to a control and then another subsequent movement related to that control. It may be defined more precisely below. A GUI in which, when a pointer 0 is immediately adjacent or passes over a control area 1, a procedure is initiated whereby subsequent movement of the pointer over a predetermined path area 3 generates a "click" event which simulates direct clicking of the control 1 and moving outside the predetermined path area 3 prior to completion of the path 3 resets the control to as if the pointer has never started along the predetermined path area 3.

WO 02/05081 A1

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.