

(51) International Patent Classification:
C08L 23/08 (2006.01)(21) International Application Number:
PCT/US2012/025919(22) International Filing Date:
21 February 2012 (21.02.2012)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
13/031,451 21 February 2011 (21.02.2011) US(71) Applicant (for all designated States except US): **CHEVRON PHILLIPS CHEMICAL COMPANY LP** [US/US]; 10001 Six Pines Drive, The Woodlands, Texas 77380 (US).

(72) Inventors; and

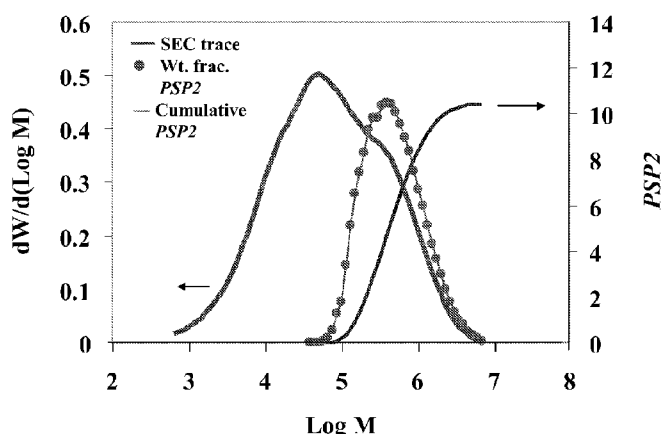
(75) Inventors/Applicants (for US only): **BUCK, Richard M** [US/US]; 4319 Fairview Road, Bartlesville, Oklahoma 74006 (US). **MASINO, Albert P.** [US/US]; 8628 S Oswego Avenue, Tulsa, Oklahoma 74137 (US). **YANG, Qing** [CN/US]; 2917 Montrose Drive, Bartlesville, Oklahoma 74006 (US). **DESLAURIERS, Paul J** [US/US]; 6831 W 84th Street, N, Owasso, Oklahoma 74005 (US). **SECORA, Steven J** [US/US]; 5932 Martin Lane, Bartlesville, Oklahoma 74006 (US). **LANIER, Elizabeth M** [US/US]; 1215 Arbor Drive, Bartlesville, Oklahoma 74006 (US). **ST****JEAN, Guylaine** [US/US]; 2557 Georgetown Drive, Bartlesville, Oklahoma 74006 (US). **RATZLAFF, Jon D** [US/US]; 1009 East Drive, Bartlesville, Oklahoma 74006 (US). **WITTNER, Christopher E** [US/US]; 3958 W Durham Road, Bartlesville, Oklahoma 74006 (US).(74) Agent: **HUSEMAN, Cheryl L**; Chevron Phillips Chemical Company LP, 10001 Six Pines Drive, The Woodlands, Texas 77380 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: POLYMER COMPOSITIONS FOR ROTATIONAL MOLDING APPLICATIONS

(57) Abstract: A polymer having a density of from about 0.94 g/cm³ to about 0.96 g/cm³ and a primary structure parameter 2 (PSP2 value) of greater than about 8.5, wherein an article formed from the polymer has an environmental stress crack resistance of equal to or greater than about 1000 hours when measured in accordance with ASTM D 1693 condition A. A polymer having at least one lower molecular weight component and at least one higher molecular weight component and having a PSP2 value of equal to or greater than about 8.5, wherein an article formed from the polymer has an environmental stress crack resistance of greater than about 1000 hours when measured in accordance with ASTM D 1693 condition A.



Published:

— *with international search report (Art. 21(3))*