

Fig.1

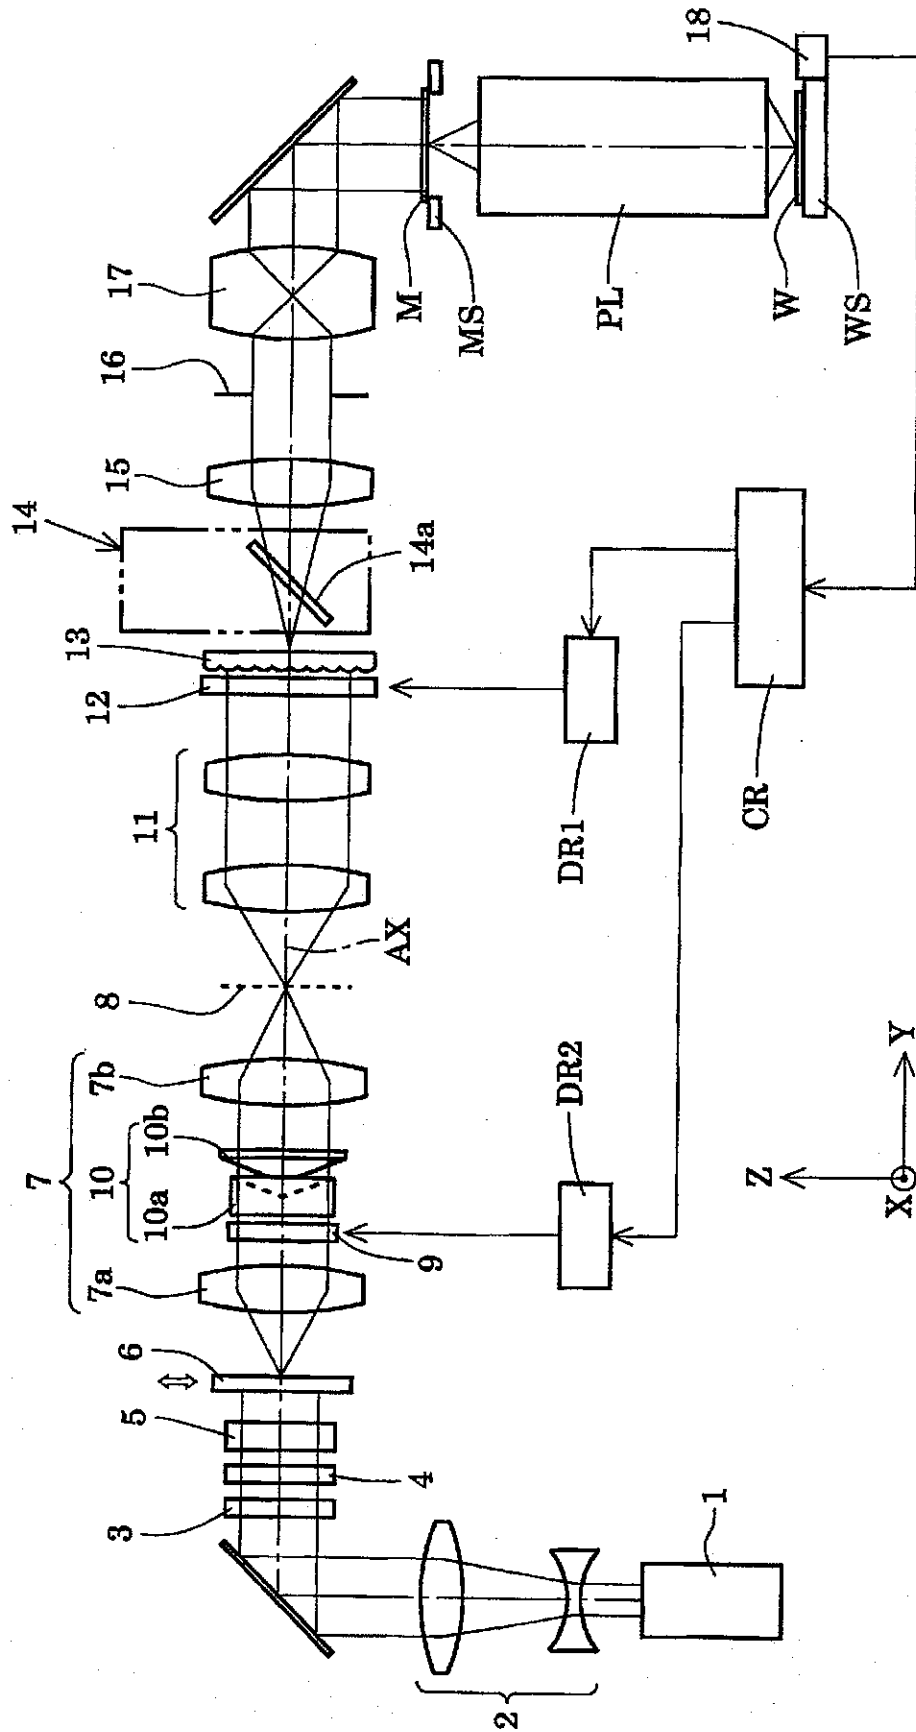


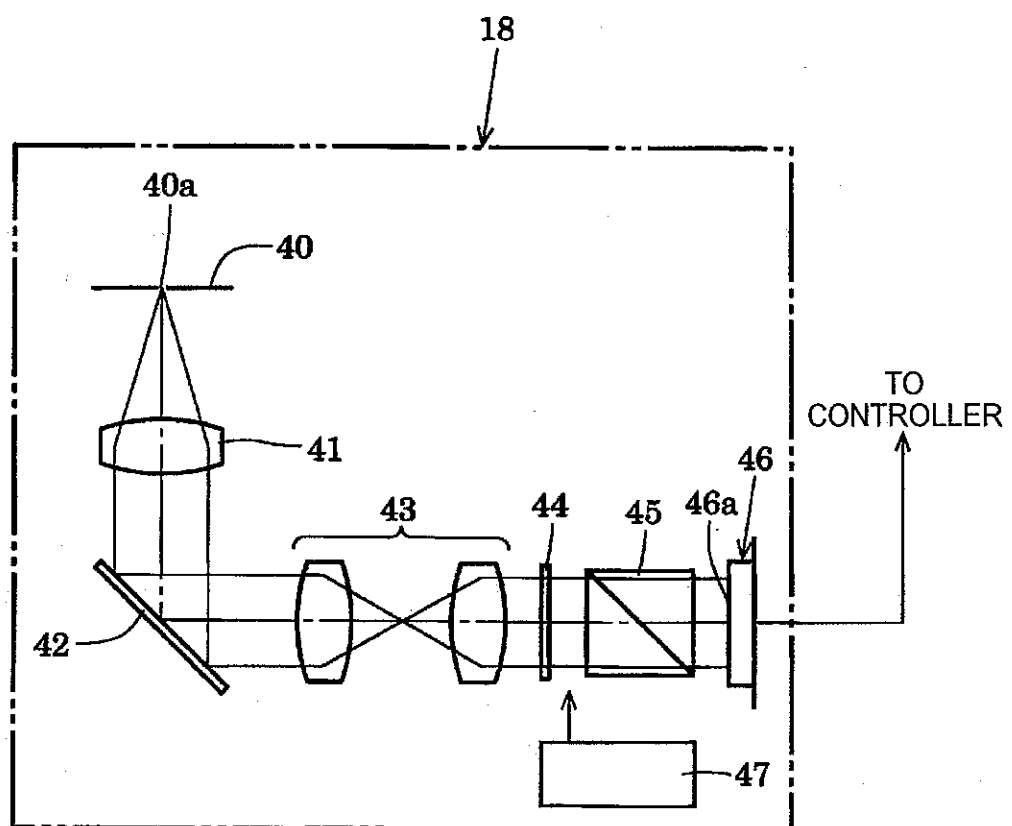
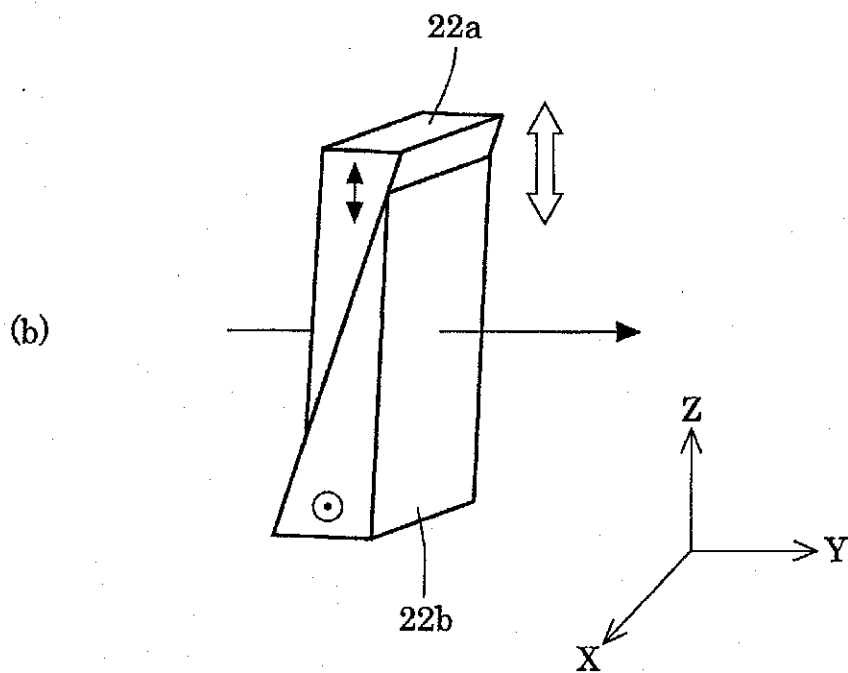
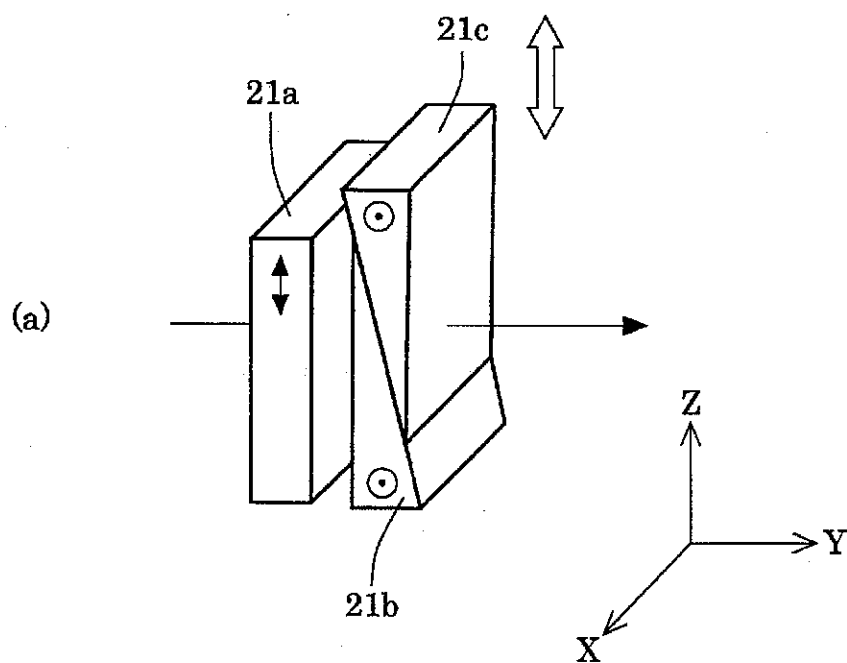
Fig.2

Fig.3

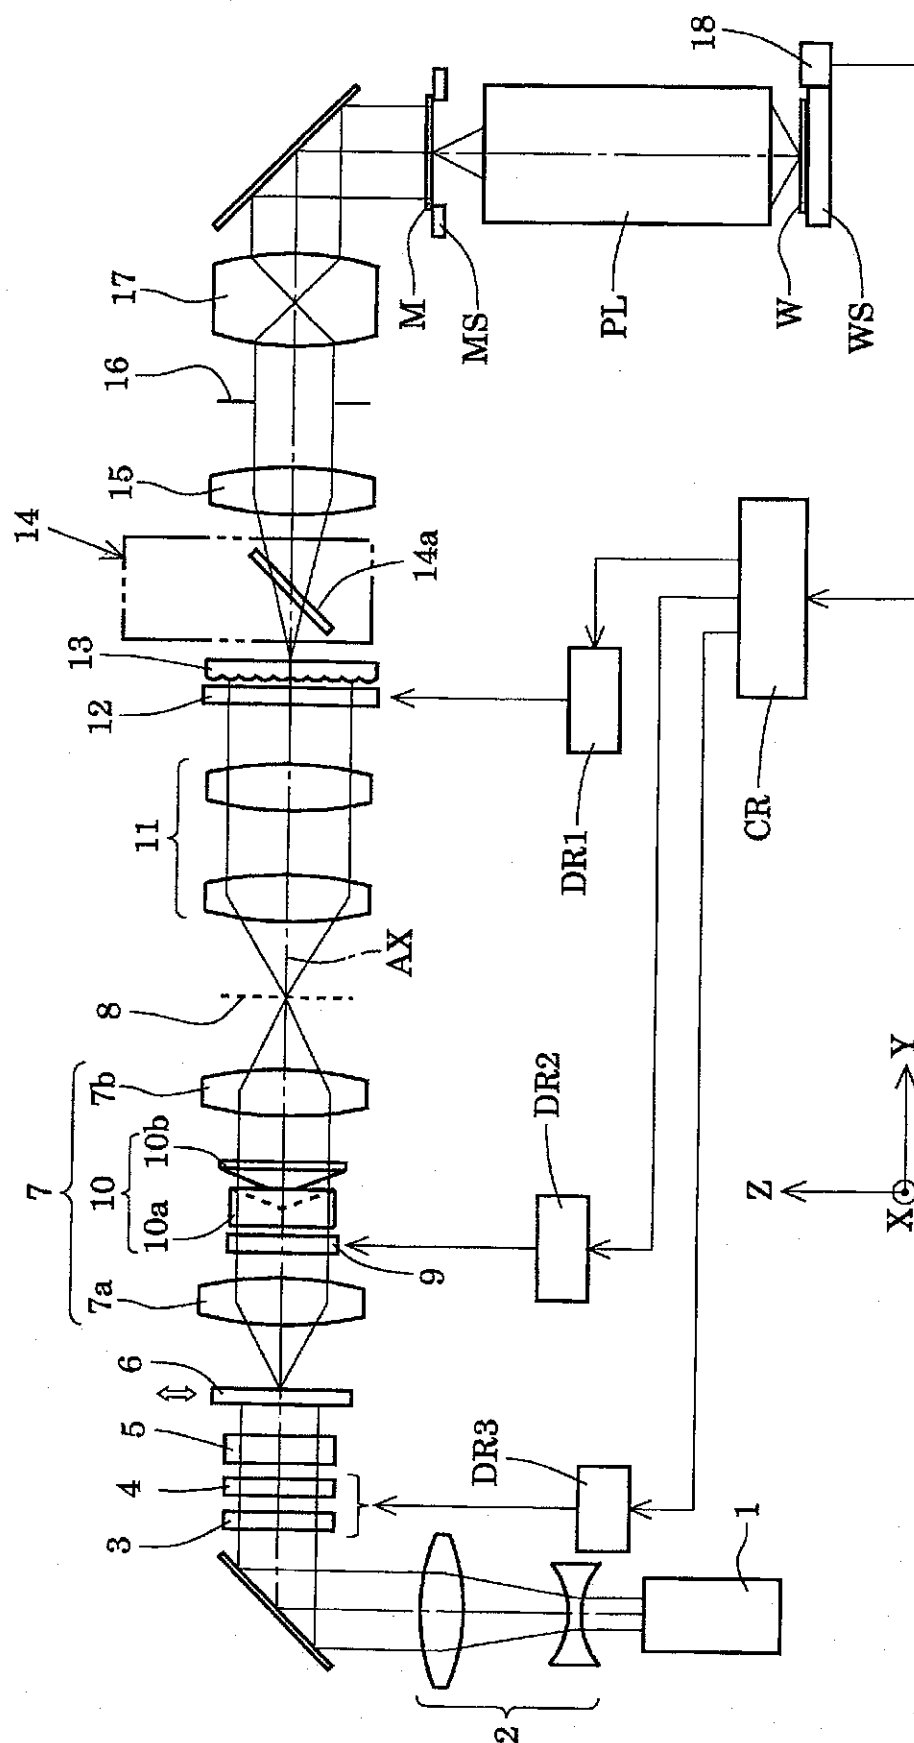


Fig. 4

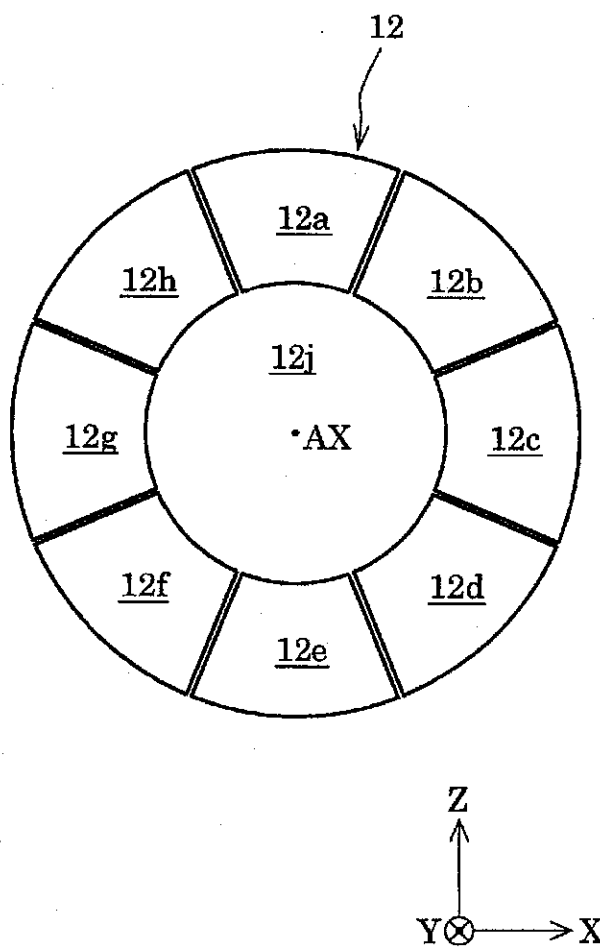
Fig.5

Fig.6

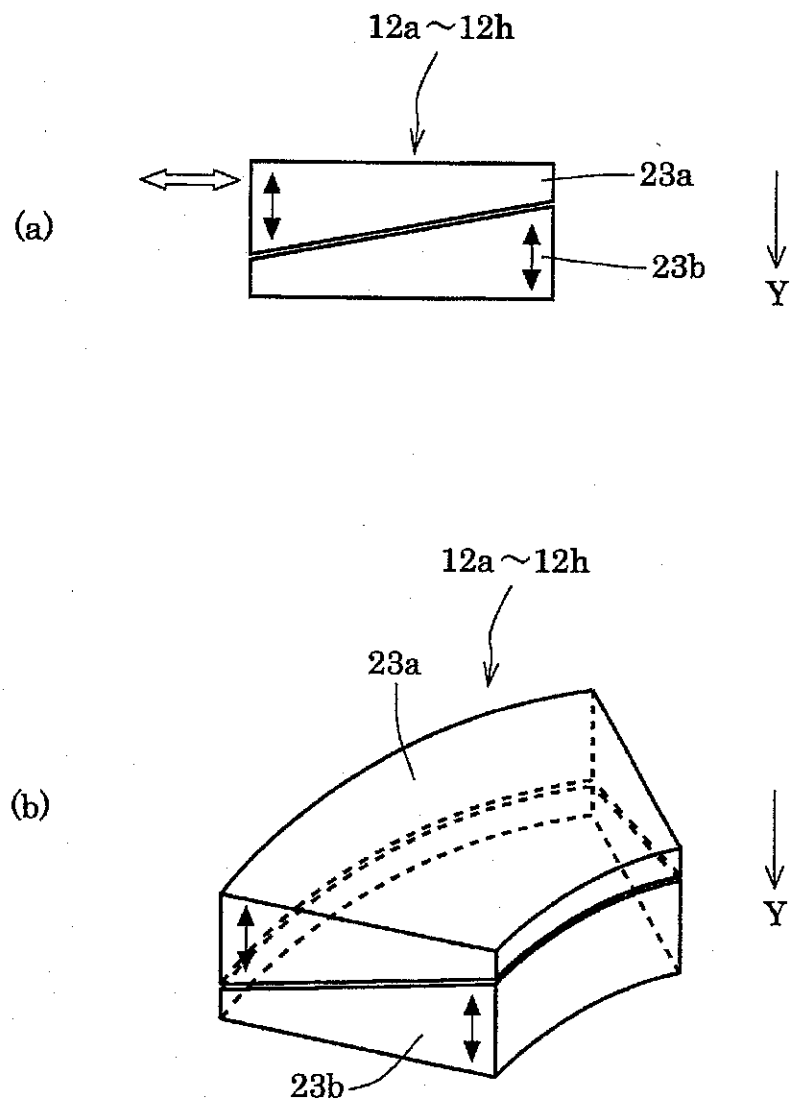


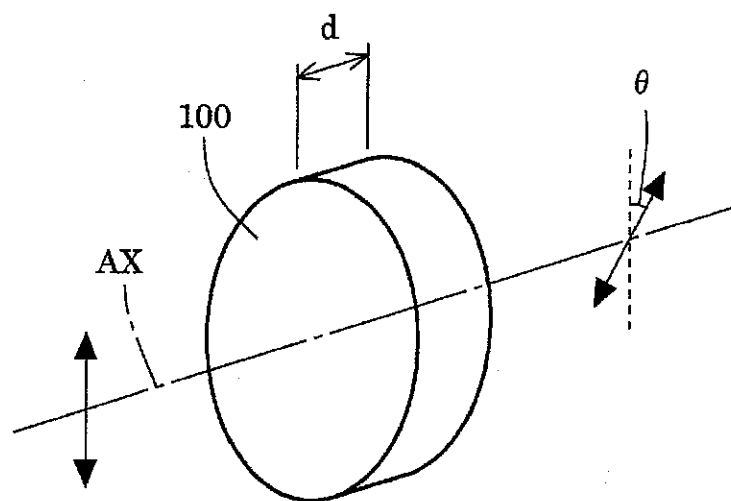
Fig.7

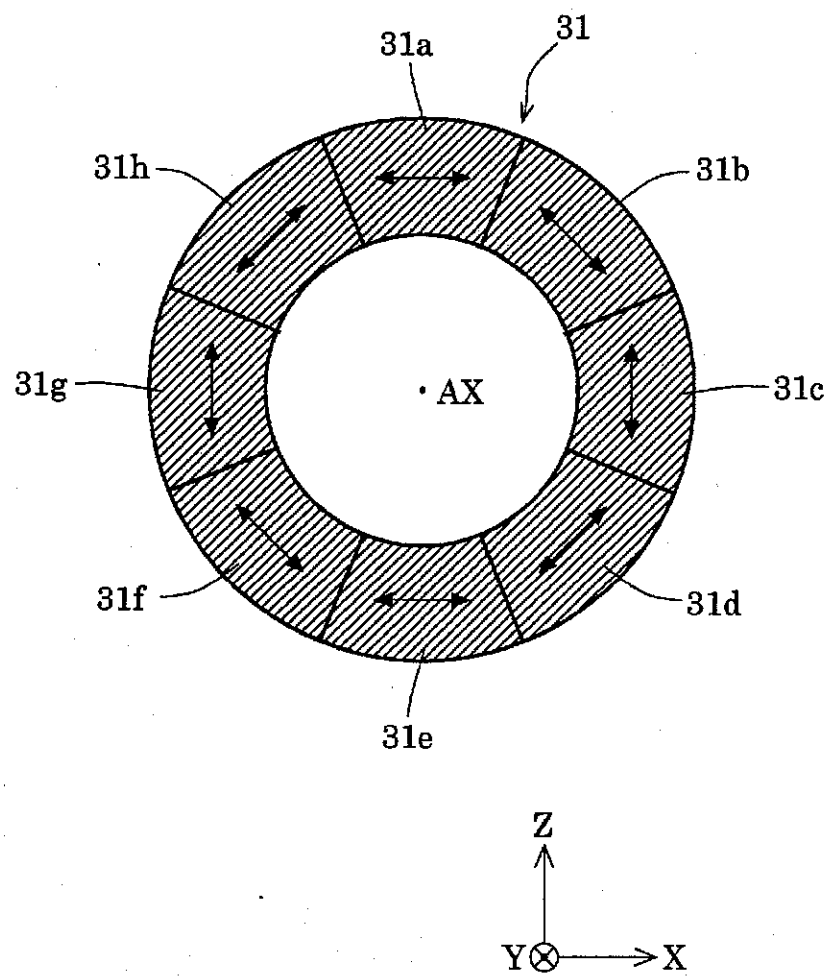
Fig.8

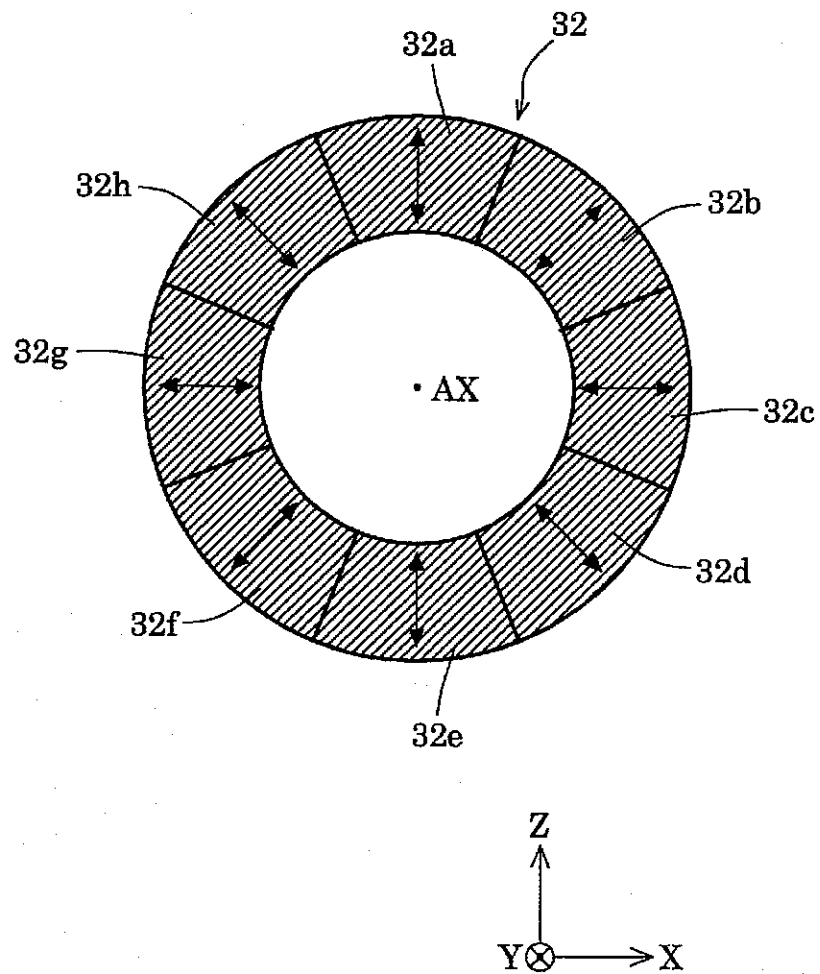
Fig.9

Fig.10


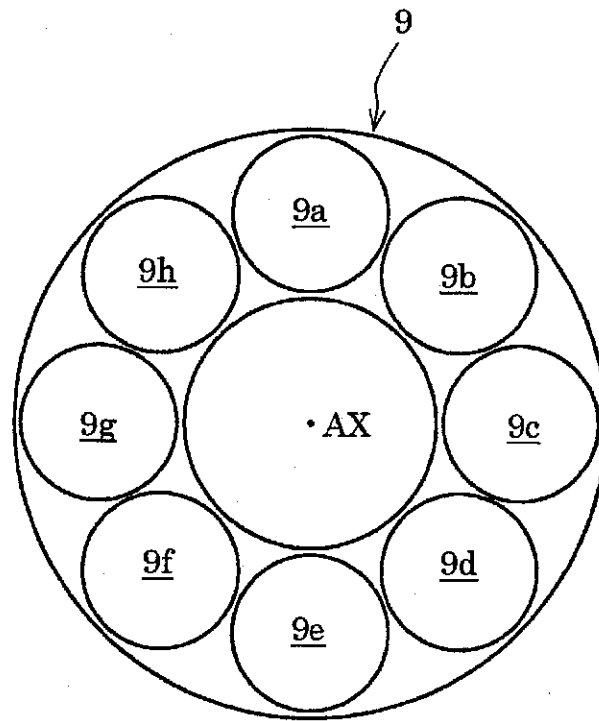


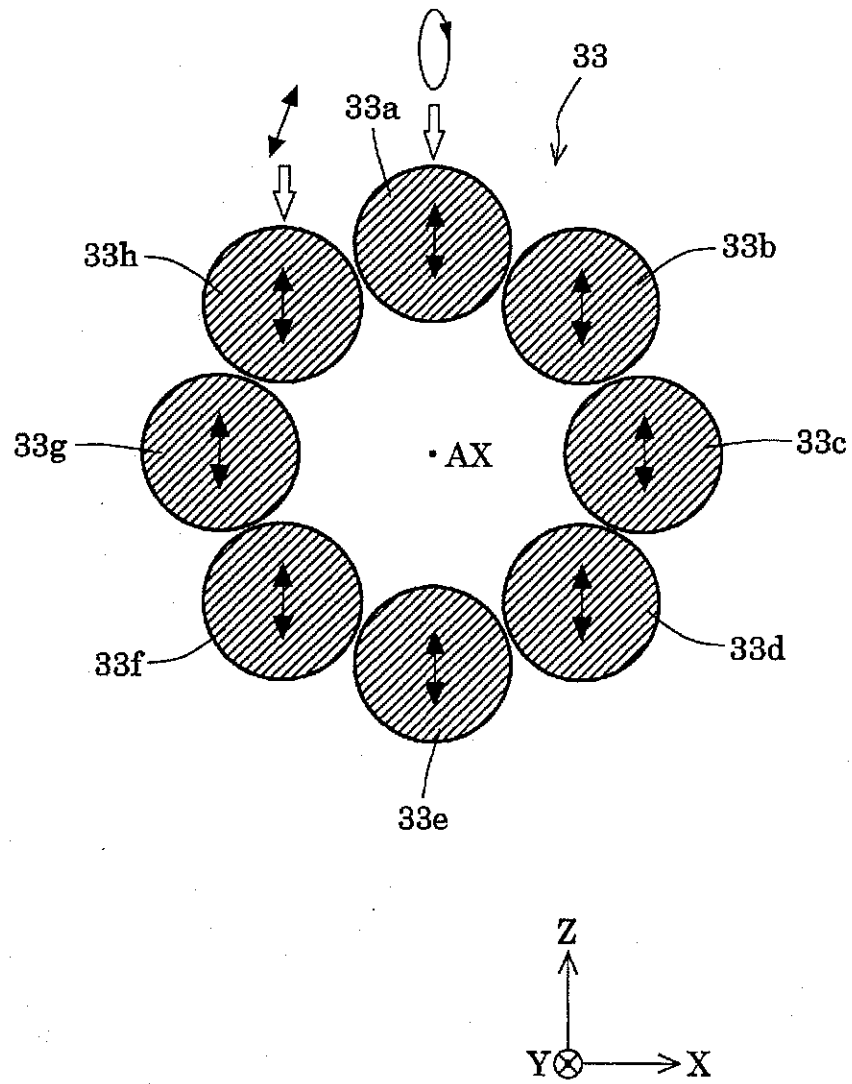
Fig.11


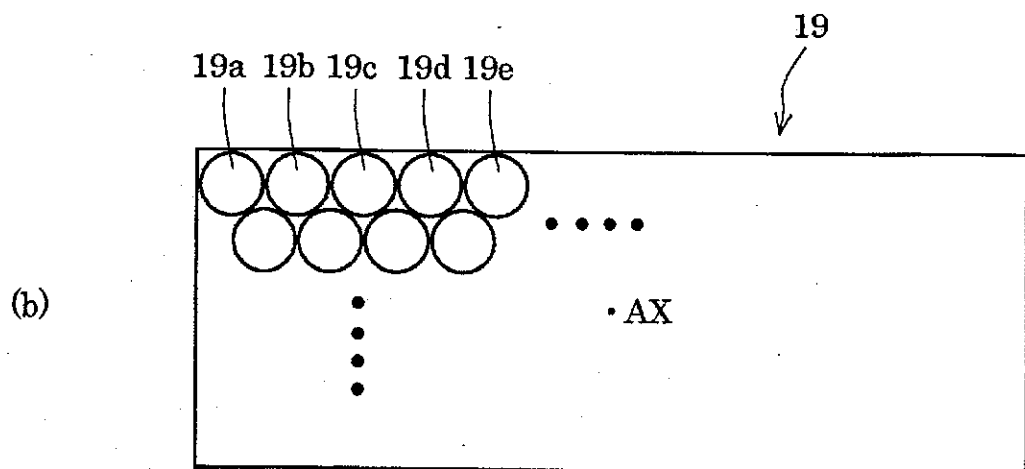
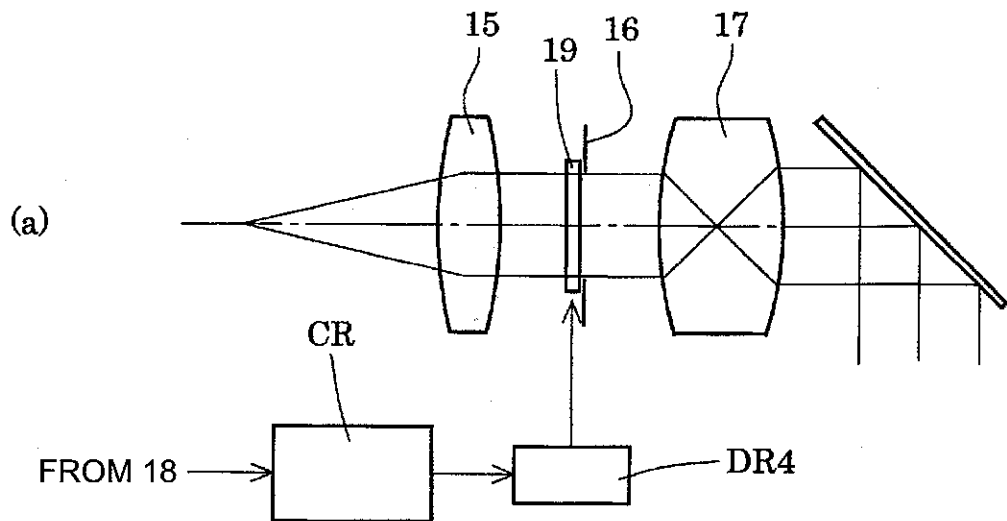
Fig.12


Fig.13

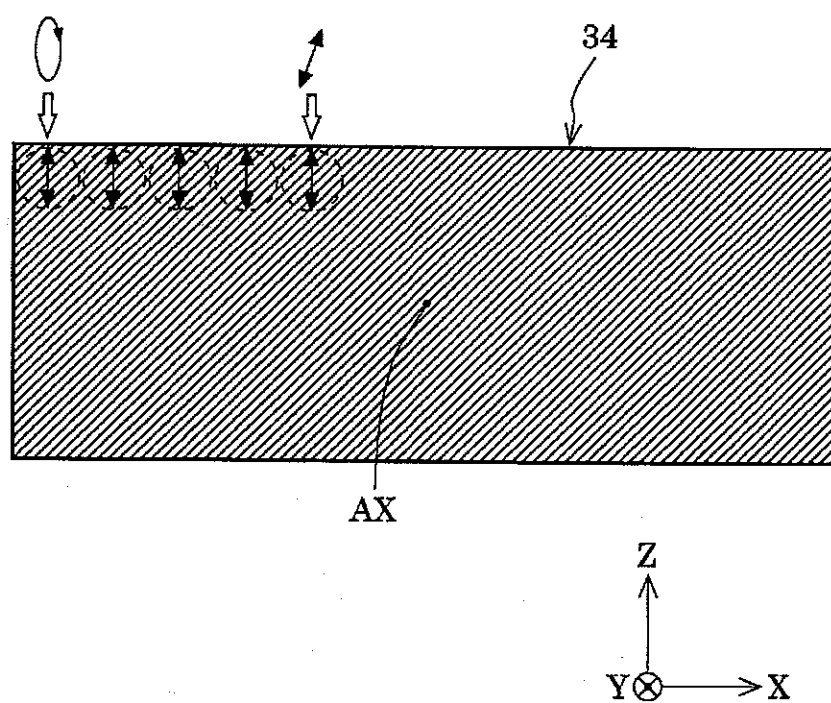Fig.14

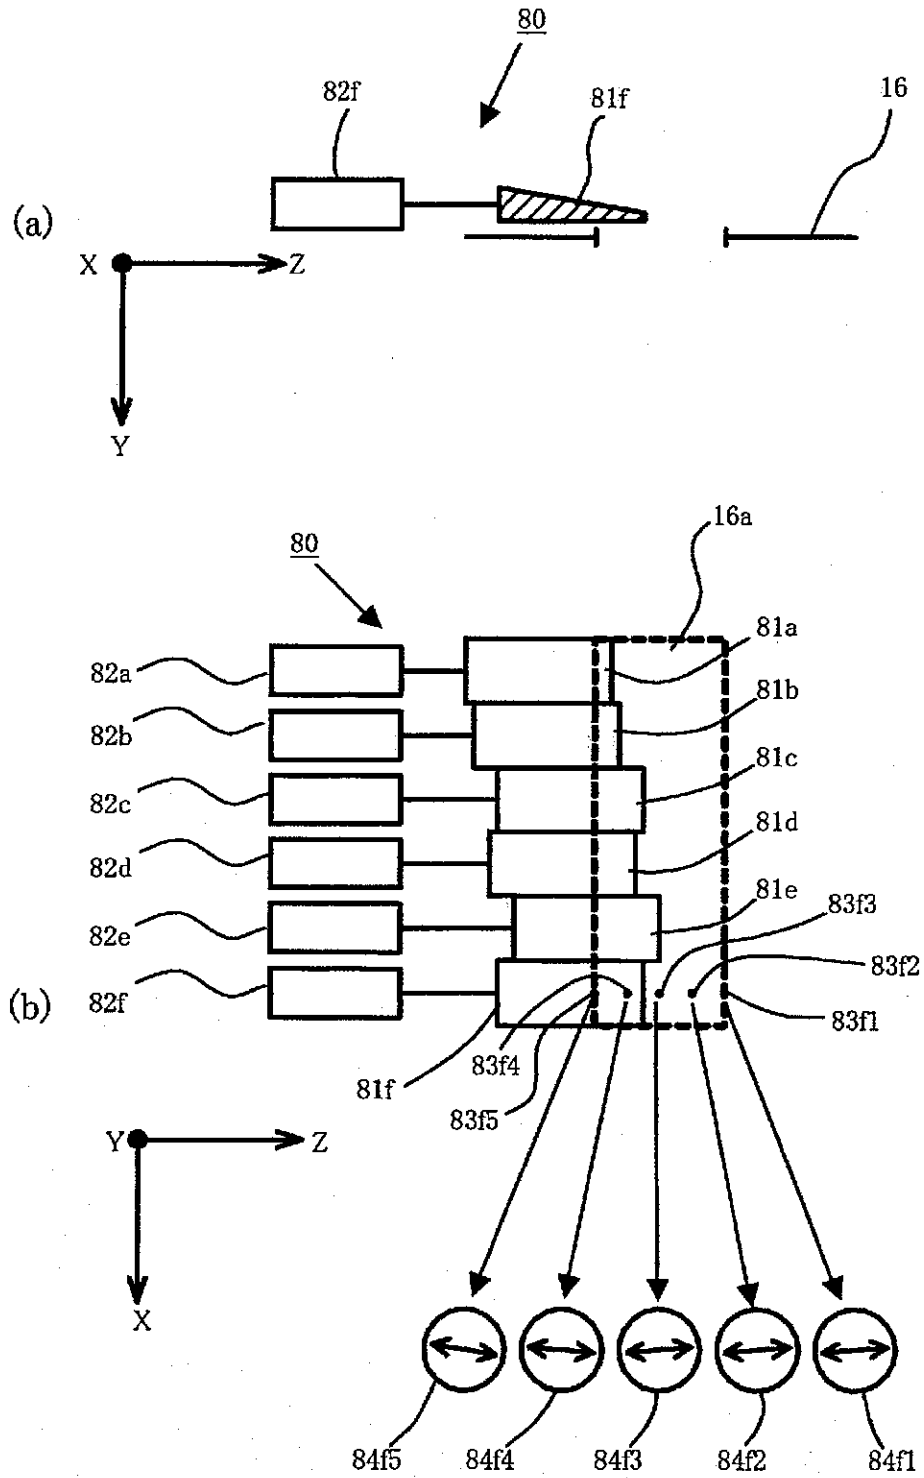



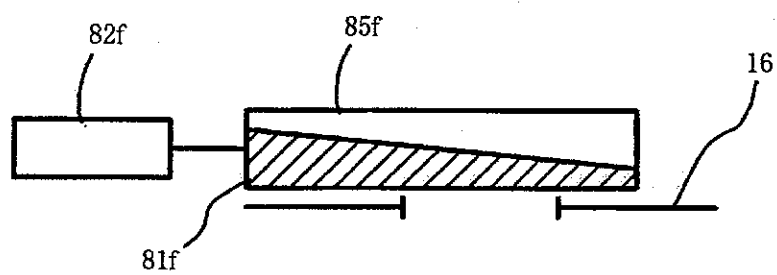
Fig.15

Fig.16

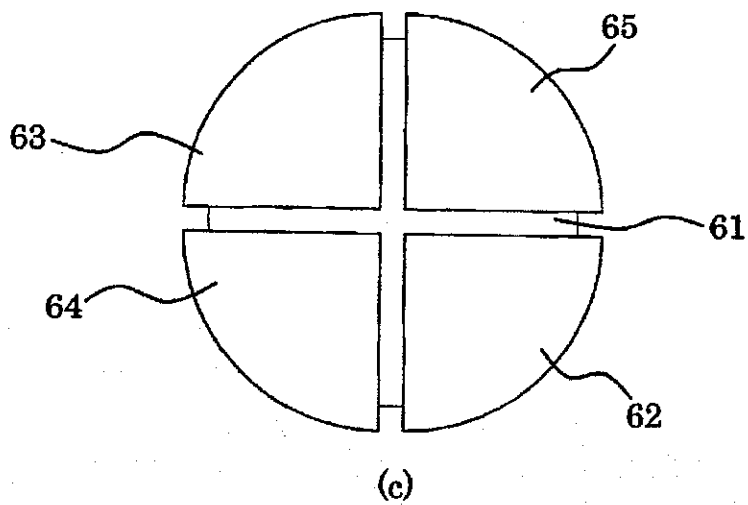
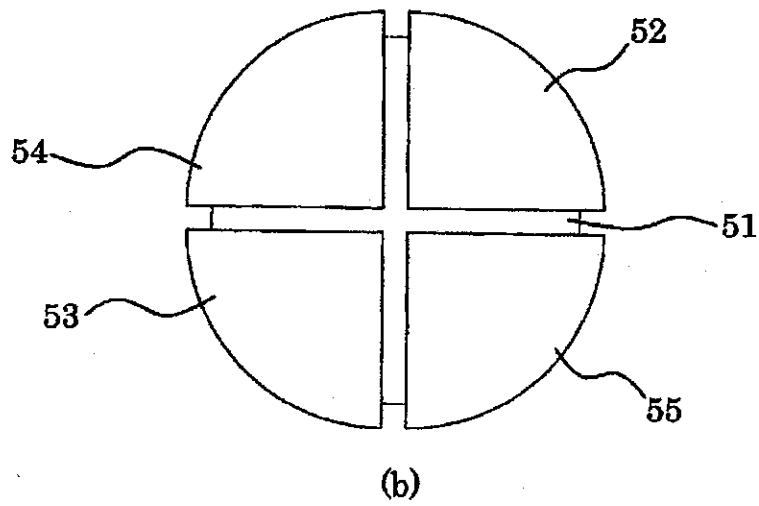
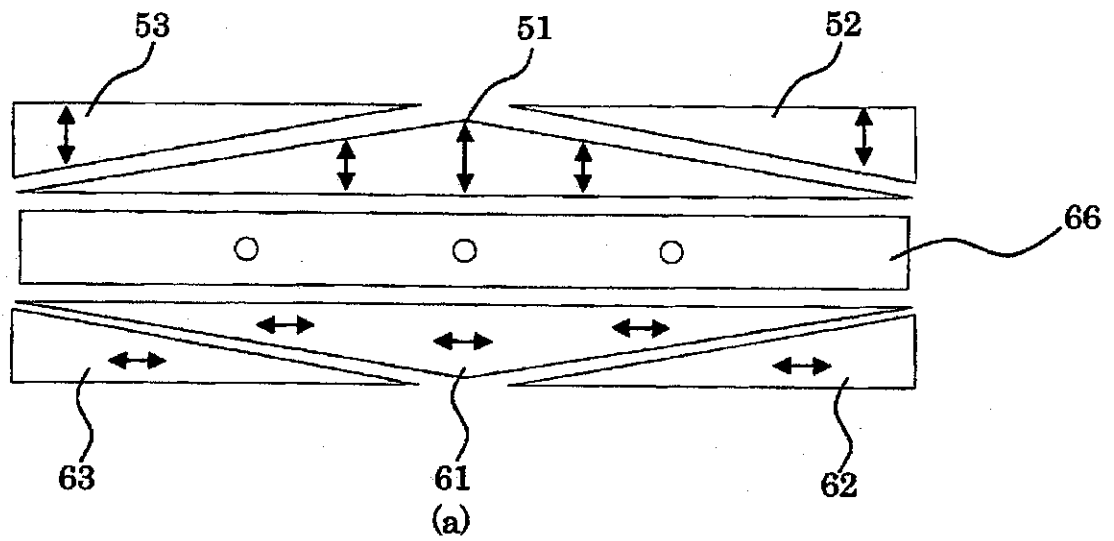


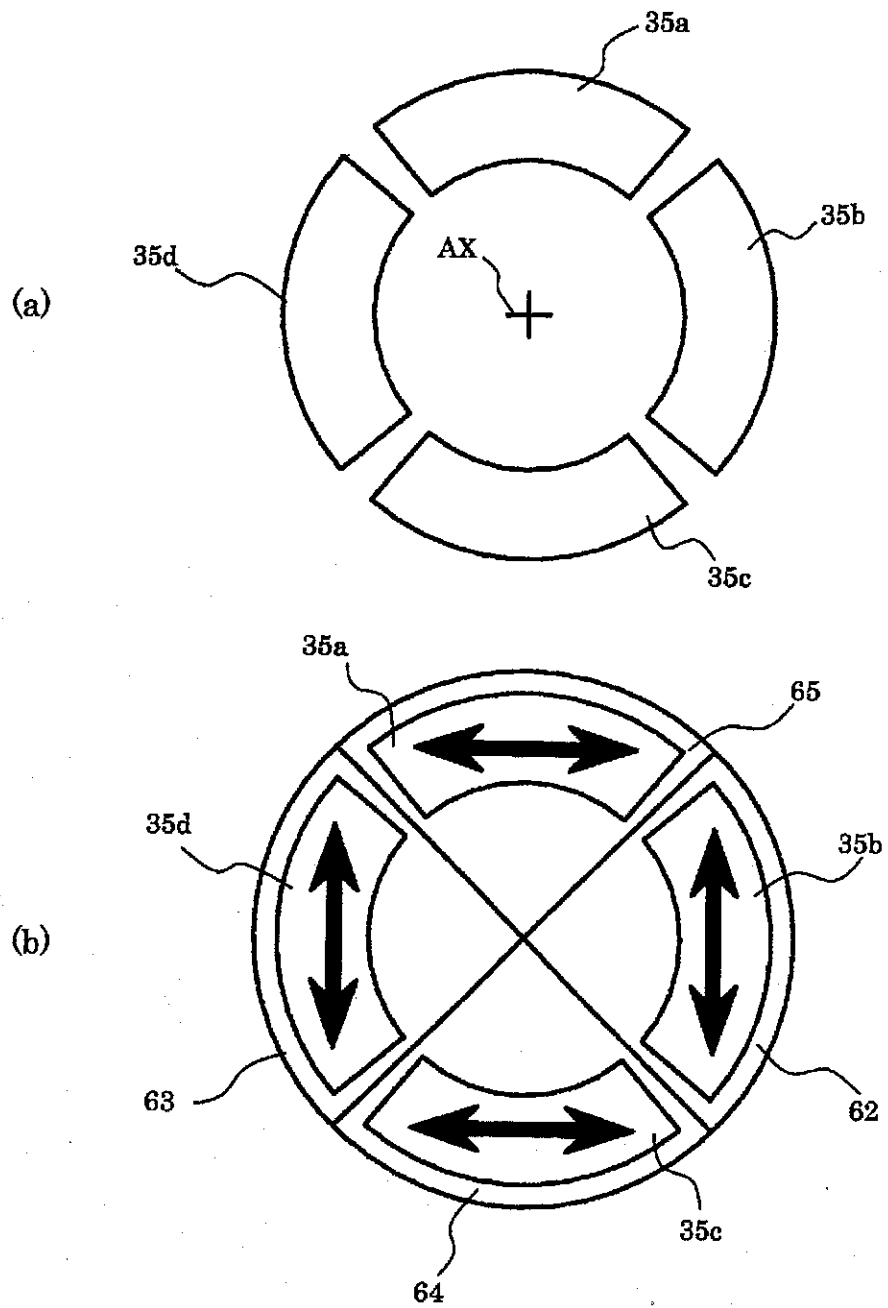
Fig.17

Fig.18

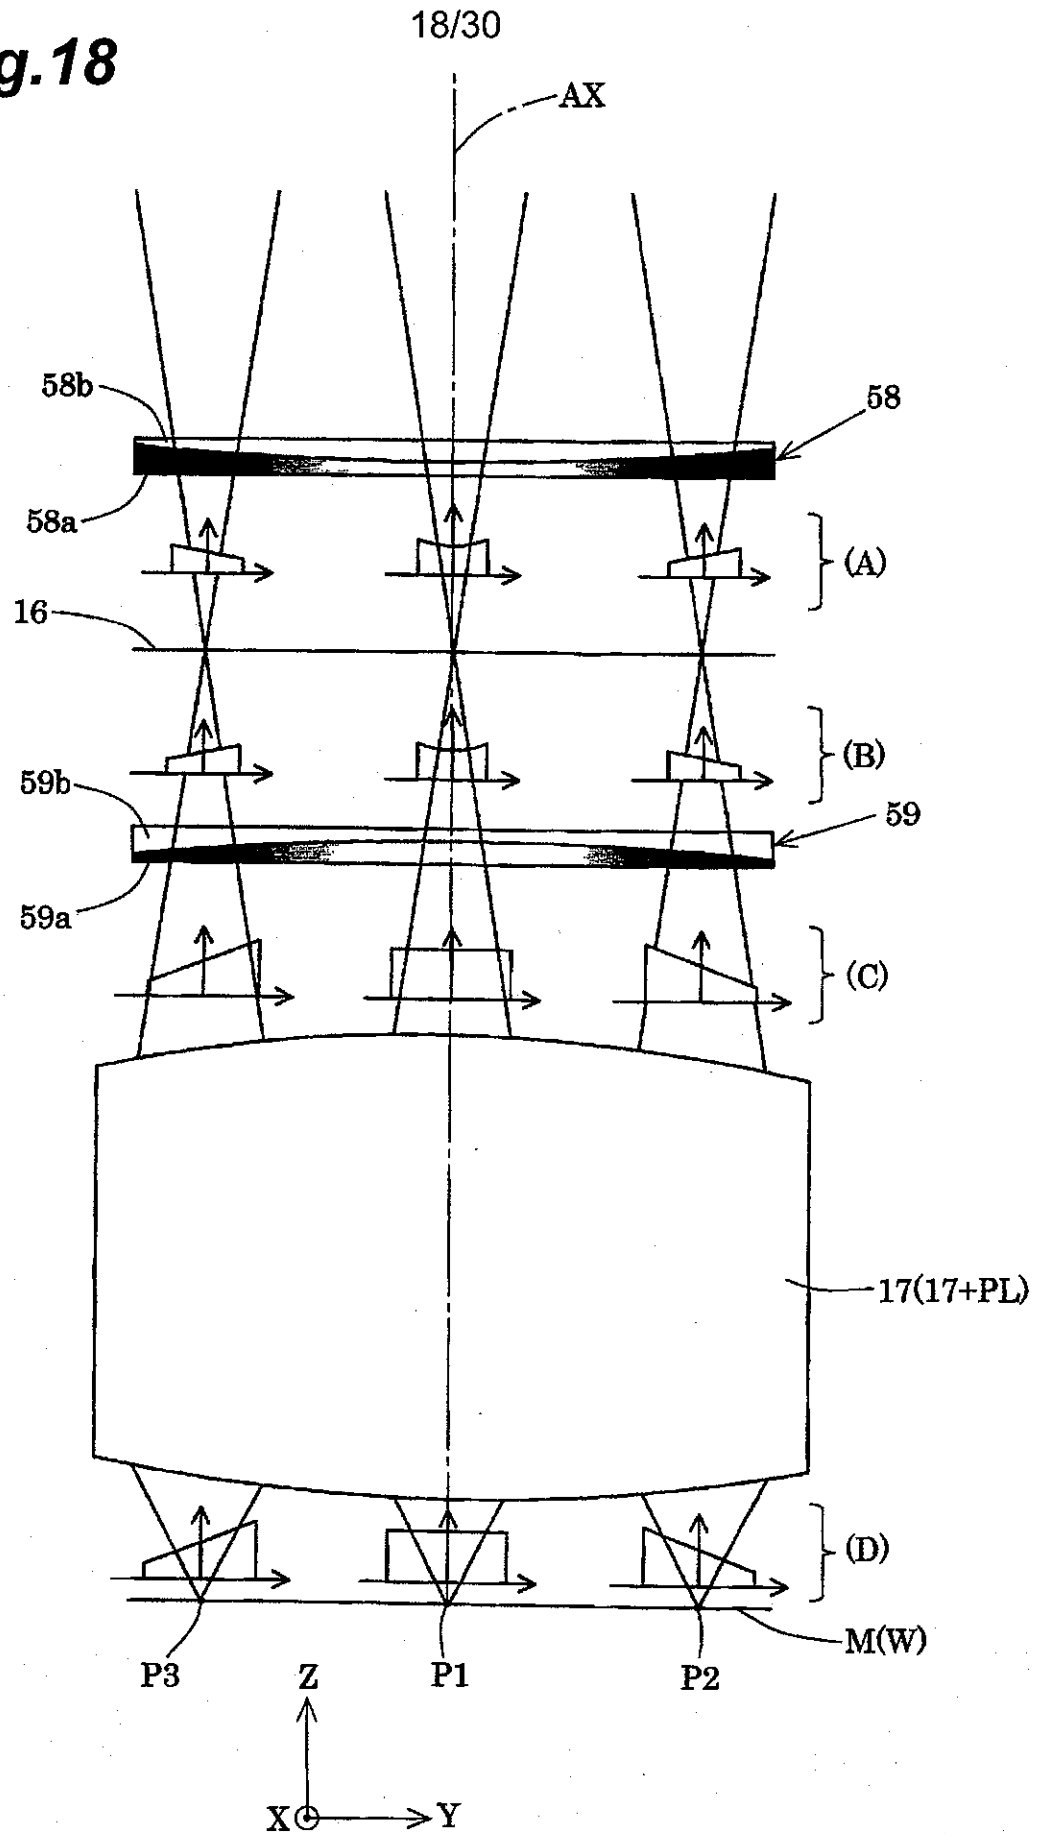
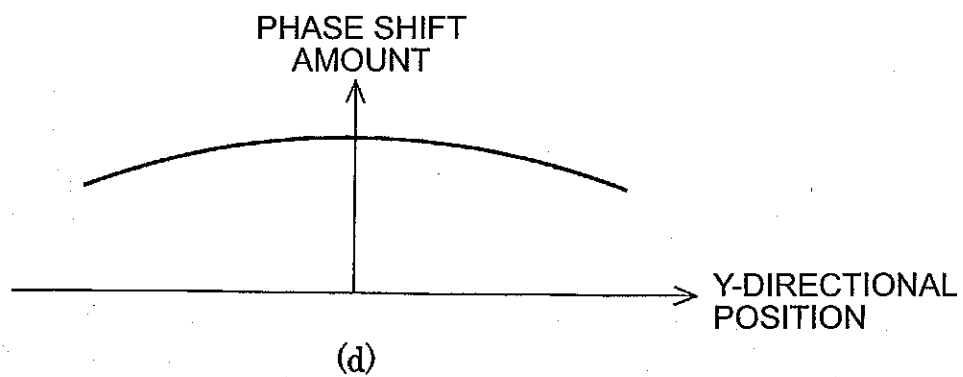
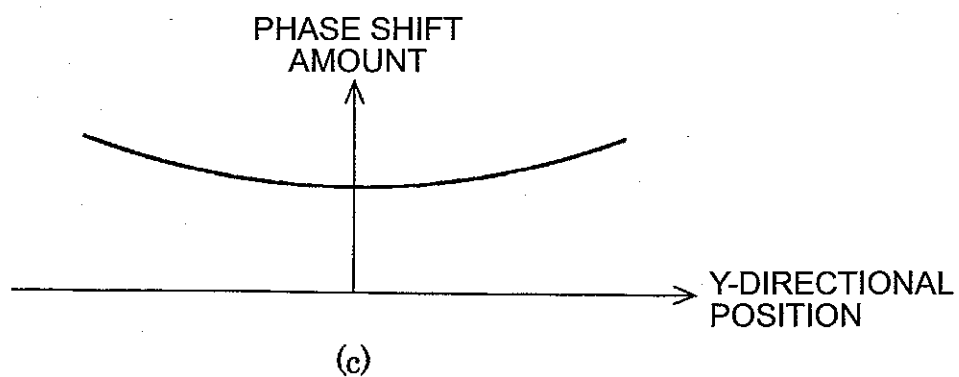
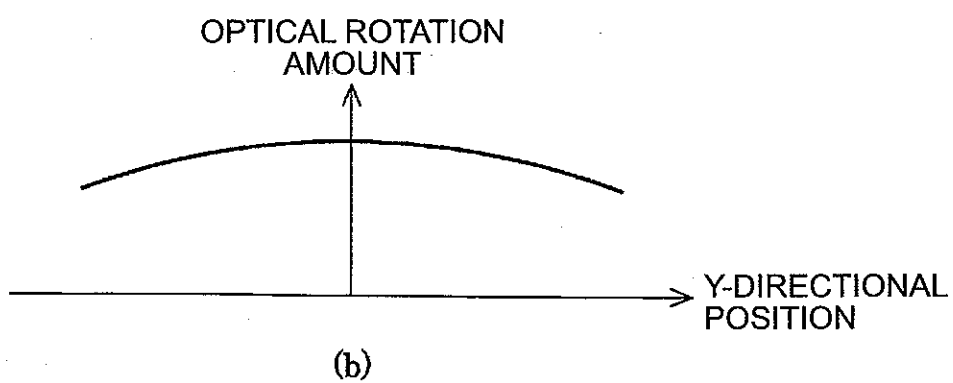
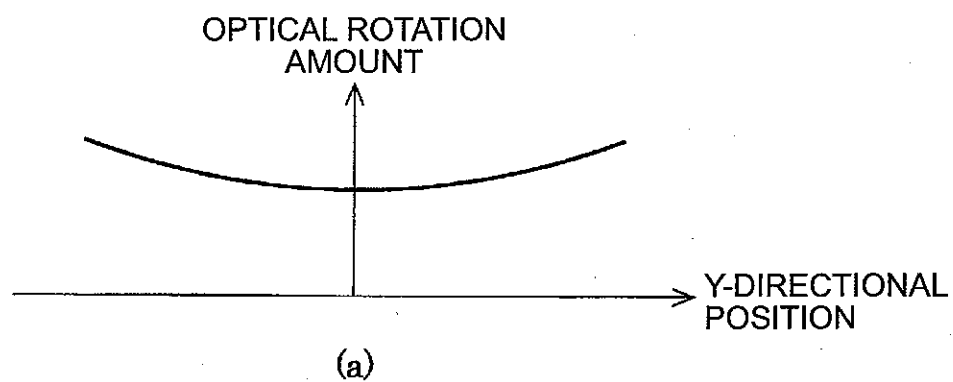


Fig.19

20/30

Fig.20

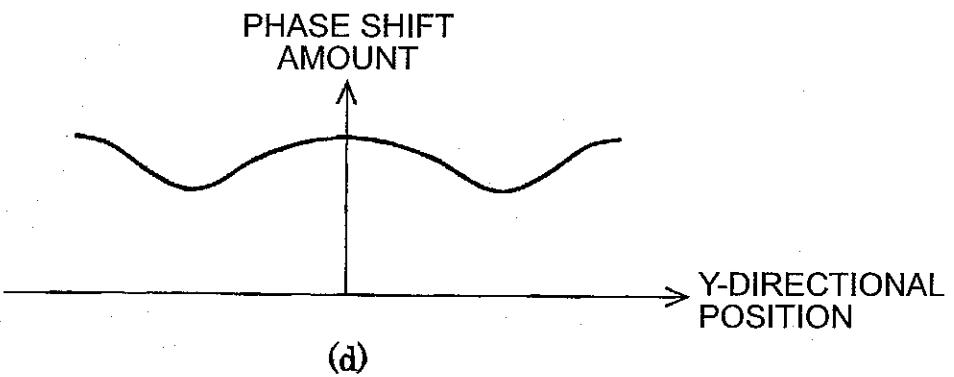
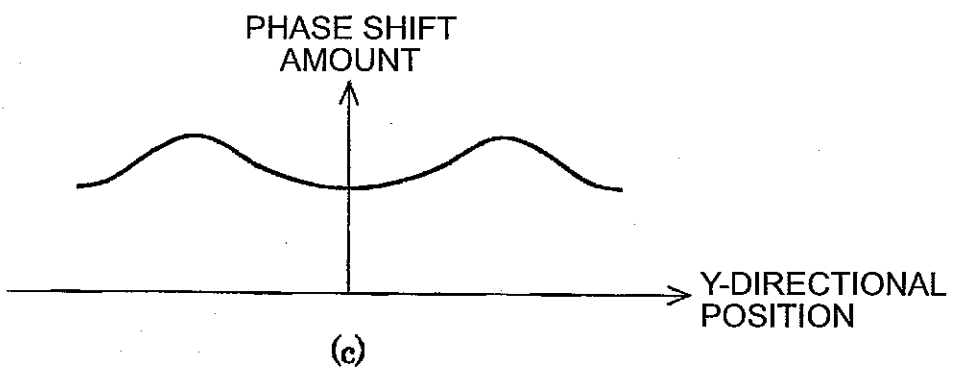
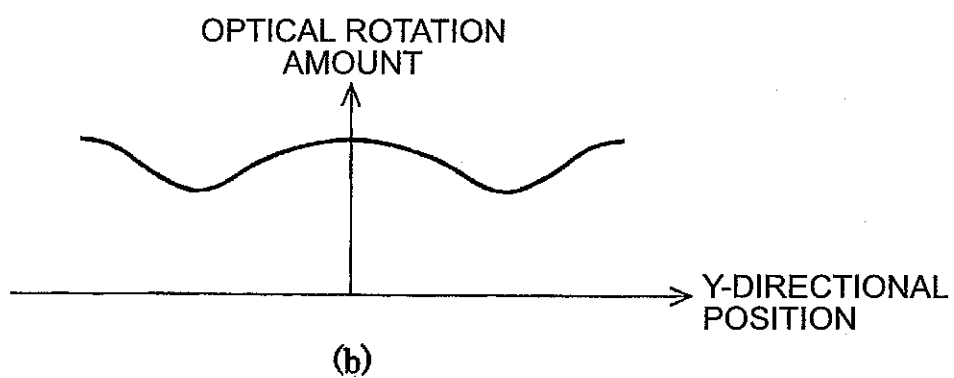
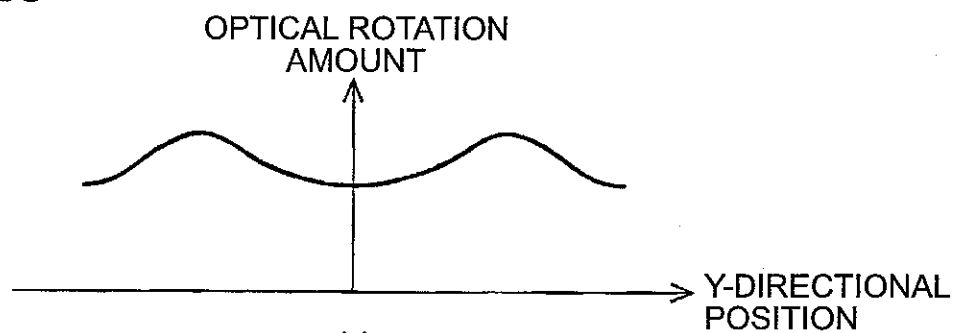




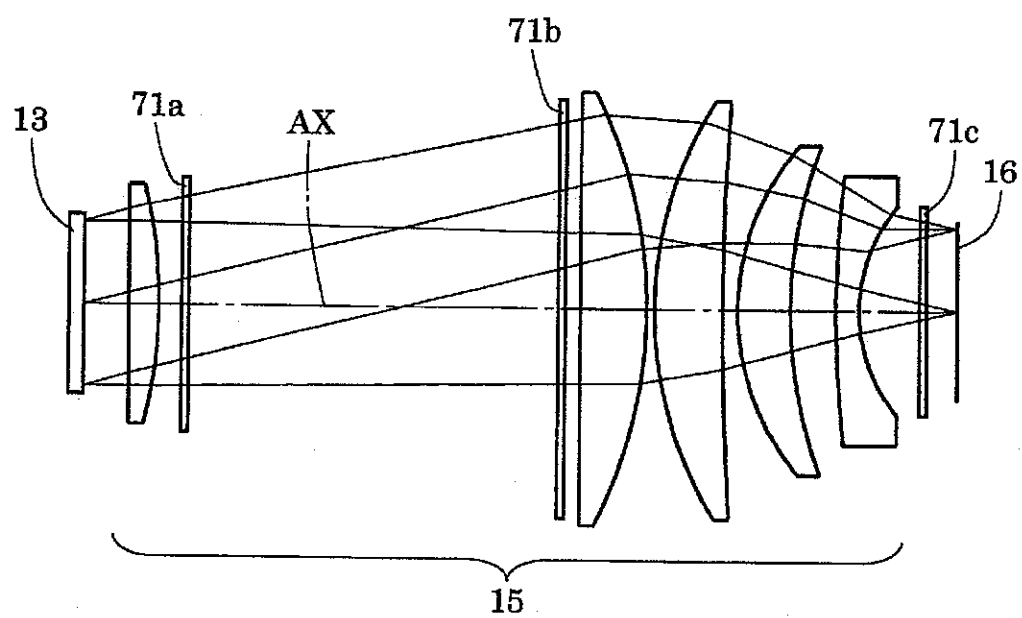
Fig.21

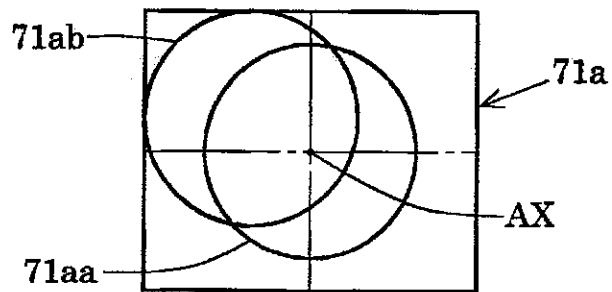
Fig.22



(a)

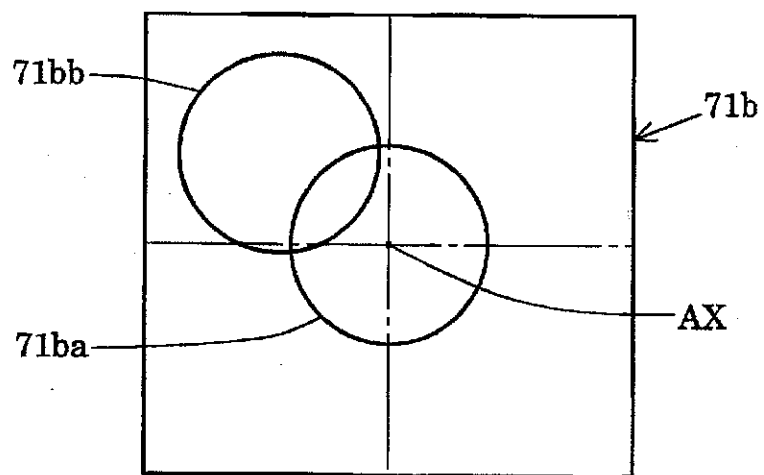

(b)

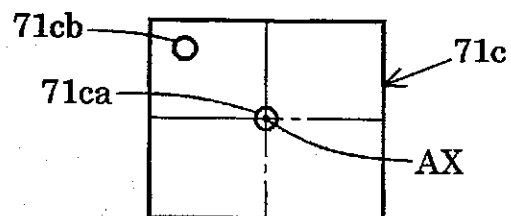

(c)

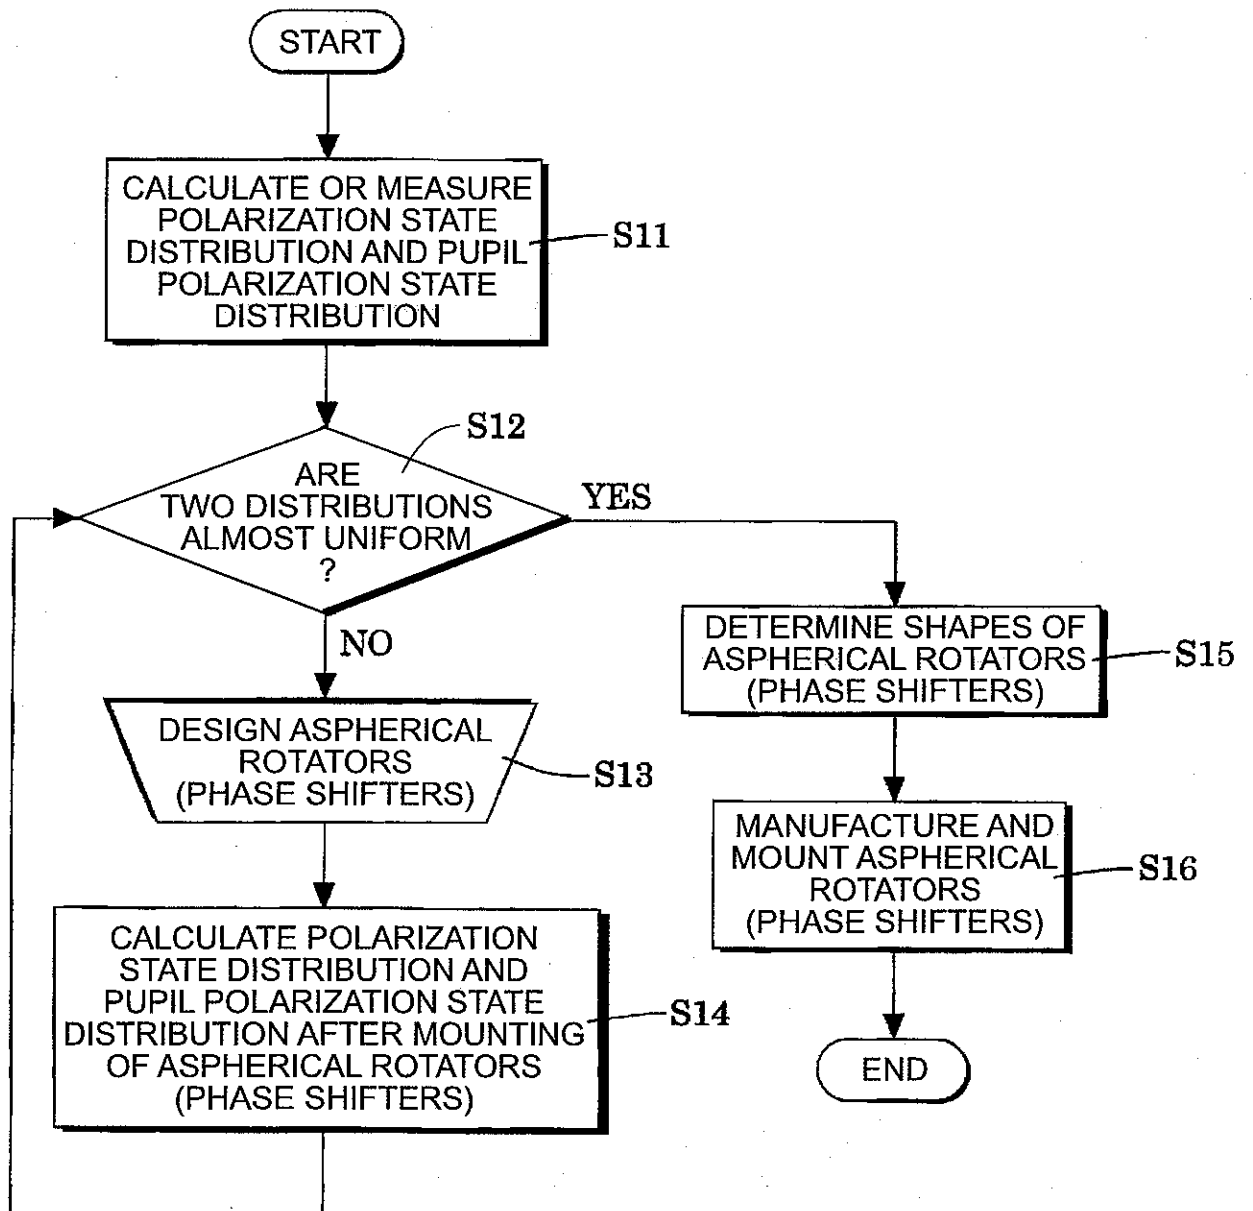
Fig.23

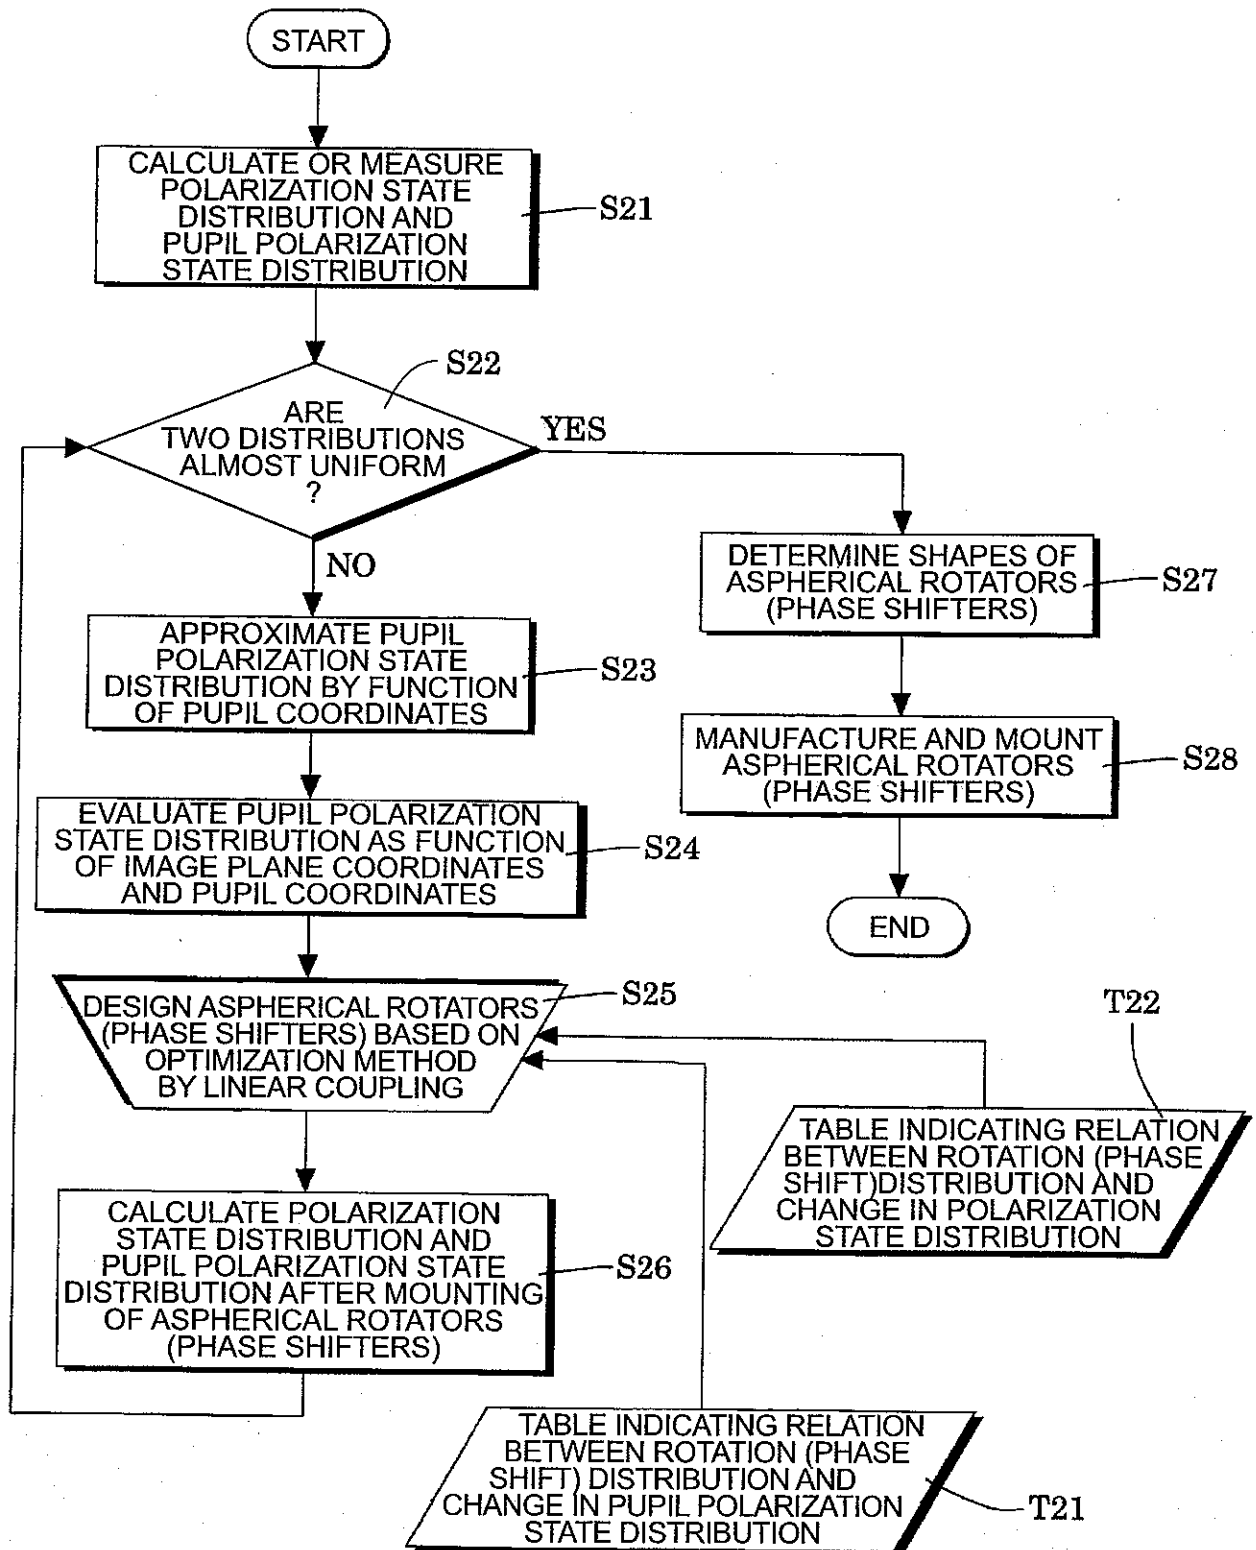
Fig.24

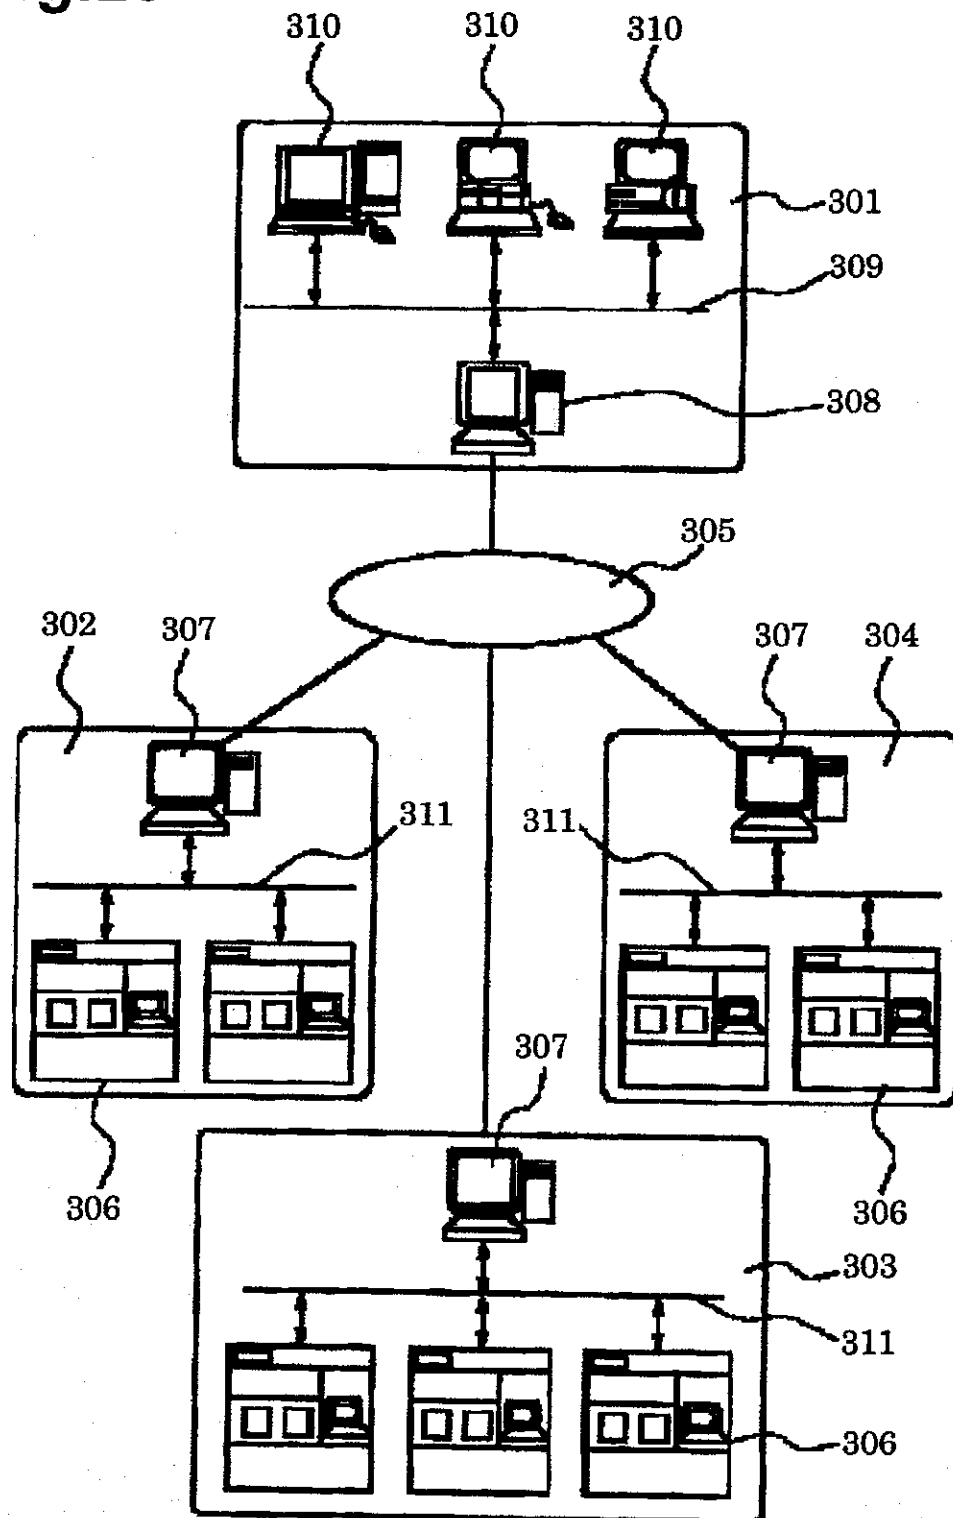
Fig.25

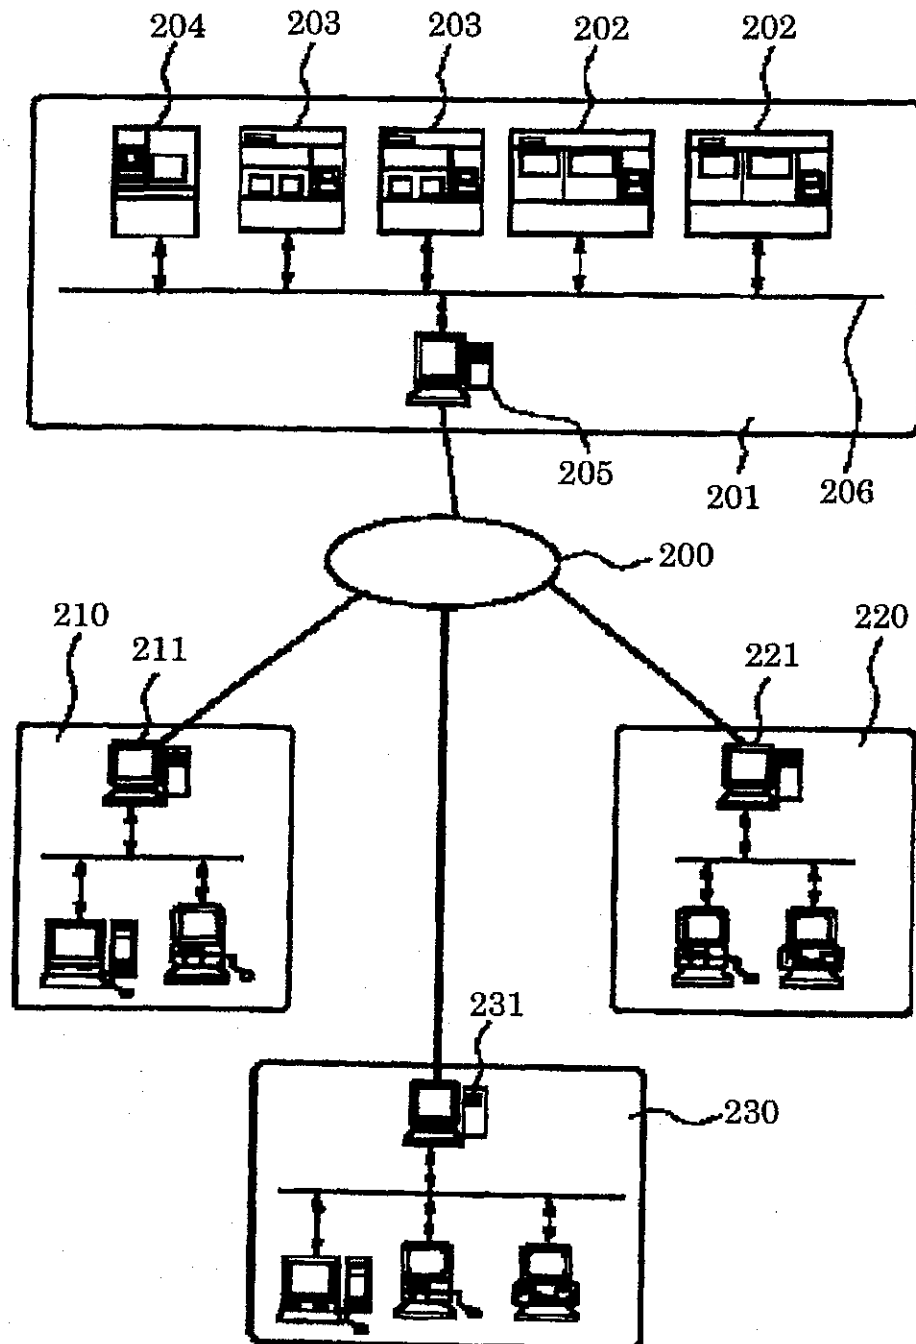
Fig.26

Fig.27

URL <http://www.maintain.co.jp/db/invut.html>

TROUBLE DB INPUT SCREEN

DATE OF OCCURRENCE	2000/8/16	404
MODEL	*****	401
SUBJECT	OPERATION FAILURE (ERROR UPON START)	403
APPARATUS S/N	465NS4580001	402
DEGREE OF URGENCY	D	405
SYMPTOM	LED KEEPS FLASHING AFTER POWER ACTIVATION	406
ACTION NEEDED	REACTIVATION OF POWER (DEPRESS RED BUTTON AT START)	407
LOG	TEMPORARY CARE DONE	408

410

[LINK TO RESULT LIST DATABASE](#) [SOFTWARE LIBRARY](#) [OPERATION GUIDE](#)

411 412


Fig.28



(a)



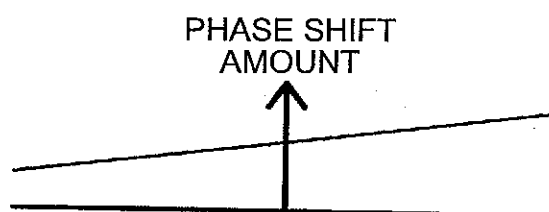(b)



(c)

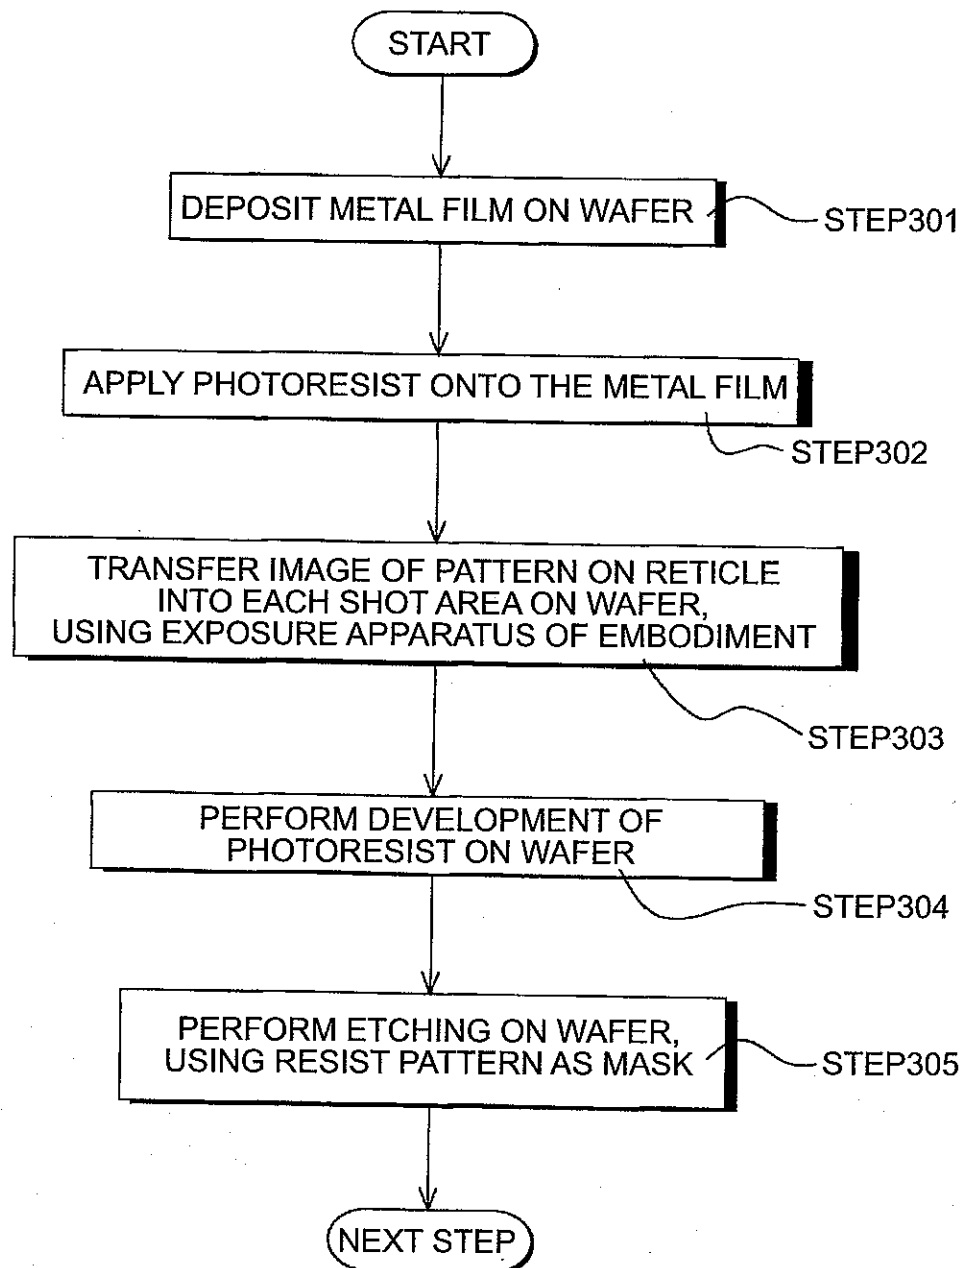
Fig.29

Fig.30