

(12) 按照专利合作条约所公布的国际申请

(19) 世界知识产权组织
国际局

(43) 国际公布日
2023 年 4 月 27 日 (27.04.2023)



(10) 国际公布号
WO 2023/066344 A1

(51) 国际专利分类号:
H04W 8/26 (2009.01)

(21) 国际申请号: PCT/CN2022/126457

(22) 国际申请日: 2022 年 10 月 20 日 (20.10.2022)

(25) 申请语言: 中文

(26) 公布语言: 中文

(30) 优先权:
202111229589.9 2021 年 10 月 21 日 (21.10.2021) CN

(71) 申请人: 华为技术有限公司 (HUAWEI TECHNOLOGIES CO., LTD.) [CN/CN]; 中国广东省深圳市龙岗区坂田华为总部办公楼, Guangdong 518129 (CN)。


(72) 发明人: 谢曦 (XIE, Xi); 中国广东省深圳市龙岗区坂田华为总部办公楼, Guangdong 518129 (CN)。 常俊仁 (CHANG, Junren); 中国广东省深圳市龙岗区坂田华为总部办公楼, Guangdong 518129 (CN)。 娄崇 (LOU, Chong); 中国广东省深圳市龙岗区坂田华为总部办公楼, Guangdong 518129 (CN)。

(74) 代理人: 北京同达信恒知识产权代理有限公司 (TDIP & PARTNERS); 中国北京市西城区裕民路 18 号北环中心 A 座 2002, Beijing 100029 (CN)。

(81) 指定国 (除另有指明, 要求每一种可提供的国家保护): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ,

(54) Title: COMMUNICATION METHOD AND COMMUNICATION APPARATUS

(54) 发明名称: 一种通信方法及通信装置

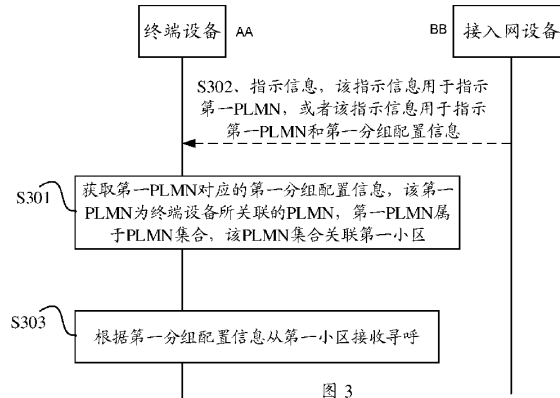

S301 Acquire first grouping configuration information corresponding to a first PLMN, wherein the first PLMN is a PLMN associated with the terminal device, and the first PLMN belongs to a PLMN set, which is associated with a first cell
S302 Indication information, wherein the indication information is used for indicating the first PLMN, or the indication information is used for indicating the first PLMN and the first grouping configuration information
S303 Receive paging from the first cell according to the first grouping configuration information
AA Terminal device
BB Access network device

(57) Abstract: Disclosed in the present application are a communication method and a communication apparatus. The method comprises: a terminal device acquiring first grouping configuration information corresponding to a first PLMN, and receiving paging from a first cell according to the first grouping configuration information, wherein the first PLMN is a PLMN associated with the terminal device, and the first PLMN belongs to a PLMN set, which is associated with the first cell; and the grouping configuration information may be considered to be configuration information for grouping the terminal device, and the terminal device can determine, on the basis

[见续页]

IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ,
LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN,
MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE,
PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE,
SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ,
UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW。

- (84) 指定国 (除另有指明, 要求每一种可提供的地区
保护): ARIPO (BW, CV, GH, GM, KE, LR, LS, MW,
MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), 欧亚
(AM, AZ, BY, KG, KZ, RU, TJ, TM), 欧洲 (AL, AT, BE,
BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR,
HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO,
PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF,
CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN,
TD, TG)。

本国际公布:

— 包括国际检索报告 (条约第21条(3))。

of the grouping configuration information, a terminal device group to which the terminal device belongs. By means of the method, different PLMNs may have corresponding grouping configuration information, such that terminal device groups controlled by a plurality of core network devices can be distinguished. Even if the group numbers that are allocated to terminal devices by different core network devices associated with a first cell are the same, the group numbers that are actually used by the different core network devices to initiate paging by means of an access network device are different, such that paging false alarms can be reduced.

(57) 摘要: 本申请公开一种通信方法及通信装置, 该方法包括: 终端设备获取第一PLMN对应的第一分组配置信息, 并根据第一分组配置信息从第一小区接收寻呼。其中, 第一PLMN为终端设备所关联的PLMN, 该第一PLMN属于PLMN集合, 所述PLMN集合关联第一小区。分组配置信息可认为是对终端设备进行分组的配置信息, 终端设备基于分组配置信息可以明确终端设备所属的终端设备组。通过该方法可以使得不同PLMN有对应的分组配置信息, 从而可以区分多个核心网设备控制的终端设备分组。即使第一小区关联的不同核心网设备对终端设备分配的分组组号相同, 不同核心网设备通过接入网设备发起寻呼实际所使用的组号也有所不同, 从而可降低寻呼虚警。