

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
8 July 2004 (08.07.2004)

PCT

(10) International Publication Number
WO 2004/057209 A1

(51) International Patent Classification⁷: **F16G 1/28**,
B29D 29/08

(21) International Application Number:
PCT/US2003/041679

(22) International Filing Date:
16 December 2003 (16.12.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/319,987 16 December 2002 (16.12.2002) US

(71) Applicant: **THE GATES CORPORATION** [US/US]; (a
Delaware, US, Corporation), 1551 Wewatta Street (IP Law
Dept. 10-A3), Denver, CO 80202 (US).

(72) Inventor: **KNUTSON, Paul, S.**; 4702 Winding Wood
Court, Columbia, MO 65203 (US).

(74) Agents: **CASTLEMAN, Curtis, H.** et al.; The Gates Cor-
poration, IP Law Dept. 10-A3, 1551 Wewatta Street, Den-
ver, CO 80202 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: POWER TRANSMISSION BELT AND METHOD

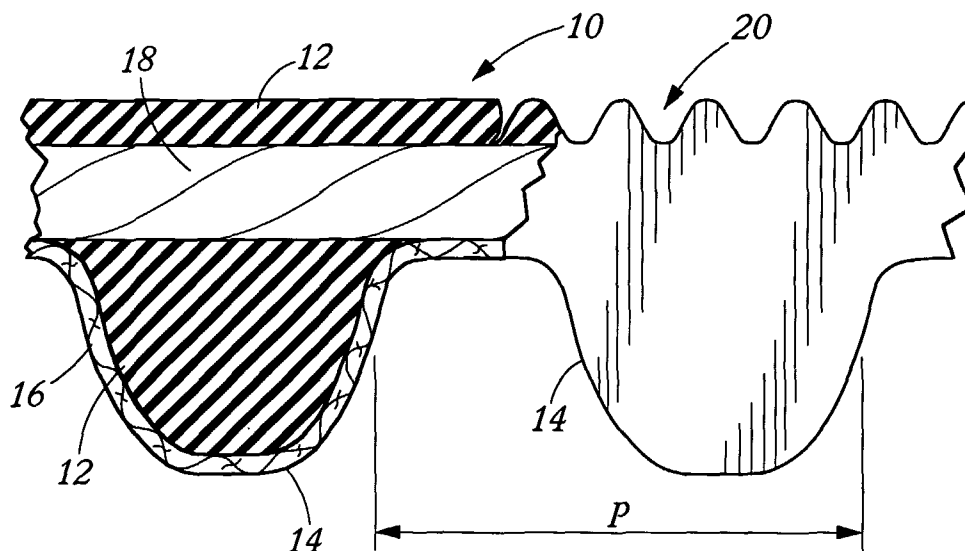

(57) Abstract: A power transmission belt (10), and more particularly a toothed power transmission belt, comprising a longitudinally extending tensile member (18) composed of one or more carbon fiber cords, wherein the belt exhibits belt growth of not more than 0.1 % based on its original length after 48 hours under High Temperature Belt Growth Analysis performed at 100°C, a method for producing such belts exhibiting reduced belt growth, and a method for reducing the angular vibration of a camshaft in relation to a crankshaft in an internal combustion engine wherein the camshaft is to driven by a timing belt.

WO 2004/057209 A1