



(51) International Patent Classification:

C02F 1/38 (2006.01) **B01B 1/00** (2006.01)
B01D 47/00 (2006.01) **B01D 21/26** (2006.01)
B01D 53/14 (2006.01) **C02F 103/18** (2006.01)

(21) International Application Number:

PCT/EP2011/052742

(22) International Filing Date:

24 February 2011 (24.02.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

10154682.8 25 February 2010 (25.02.2010) EP
 10168279.7 2 July 2010 (02.07.2010) EP

(71) Applicant (for all designated States except US): **ALFA LAVAL CORPORATE AB** [SE/SE]; Box 73, S-221 00 Lund (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KÖNIGSSON, Staffan** [SE/SE]; Sedelvägen 20, S-147 40 Tumba (SE).
SUNDQUIST, Lena [SE/SE]; Essingeringen 94, S-112 64 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: EXHAUST GAS AND GAS SCRUBBER FLUID CLEANING EQUIPMENT AND METHOD

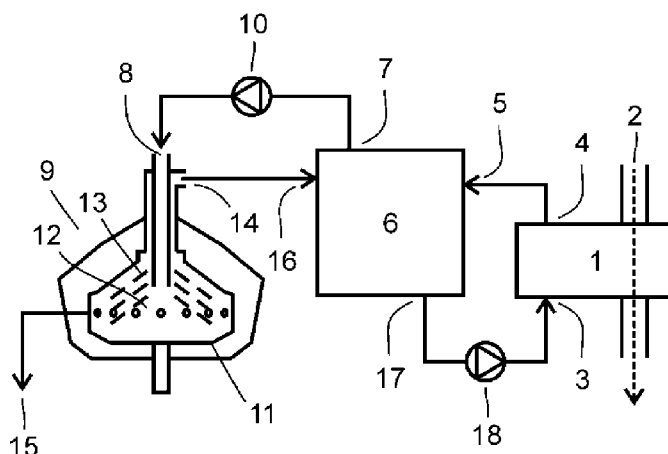


Fig. 1

(57) Abstract: The present invention relates to an exhaust gas cleaning equipment comprising a gas scrubber (1) and a scrubber fluid cleaning equipment for cleaning polluted scrubber fluid. The scrubber fluid cleaning equipment comprises a centrifugal separator (9) for separating at least a pollutant phase and a cleaned scrubber fluid from said polluted scrubber fluid. The centrifugal separator has a rotor (11) enclosing a separation space (12) with a stack of separating discs (13), a separator inlet (8) for polluted scrubber fluid extending into said separation space, a first separator outlet (14) for cleaned scrubber fluid extending from said separation space, and a second separator outlet (15) for the pollutant phase extending from said separation space. The present invention further relates to a method for cleaning polluted scrubber fluid.