(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
6 May 2010 (06.05.2010)

PCT

(10) International Publication Number
WO 2010/050991 A1

(51) International Patent Classification:
E21B 17/00 (2006.01)

(21) International Application Number:
PCT/US2008/082248

(22) International Filing Date:
3 November 2008 (03.11.2008)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant *(for all designated States except US)*: **EXXONMOBIL UPSTREAM RESEARCH COMPANY** [US/US]; CORP-URC-SW-359, P.O. Box 2189, Houston, TX 77252-2189 (US).

(72) Inventors; and

(75) Inventors/Applicants *(for US only)*: **YEH, Charles, S.** [US/US]; 9511 Merlins Oaks Court, Spring, TX 77379 (US). **DALE, Bruce, A.** [US/US]; 7122 Hidden Trails Court, Sugar Land, TX 77479 (US). **CLINGMAN, Scott, R.** [US/US]; 2139 McClendon Street, Houston, TX 77030 (US).

(74) Agents: **McARTHUR, Douglas, W.** et al.; Exxonmobil Upstream Research Company, CORP-URC-SW-359, P.O. Box 2189, Houston, TX 77252-2189 (US).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

(54) **Title**: WELL FLOW CONTROL SYSTEMS AND METHODS

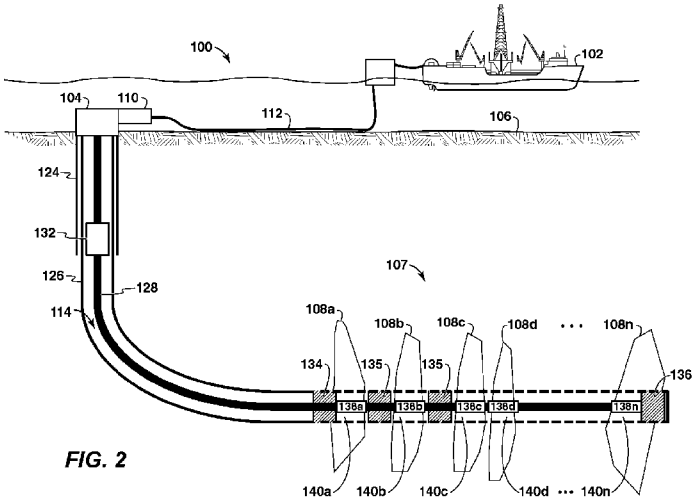


FIG. 2

(57) **Abstract**: Flow control systems and methods for use in hydrocarbon well operations include a tubular and a flow control apparatus. The tubular defines a well annulus and includes an outer member defining a flow conduit. Fluid communication between the well annulus and the flow conduit is provided by permeable portion(s) of the outer member. The flow control apparatus is disposed within the flow conduit and comprises conduit-defining and chamber-defining structural members. The conduit-defining structural member(s) is configured to divide the flow conduit into at least two flow control conduits. The chamber- defining structural member(s) is configured to divide at least one of the at least two flow control conduits into at least two flow control chambers. Each of the flow control chambers has at least one inlet and one outlet, each of which is adapted to allow fluid flow therethrough and to retain particles larger than a predetermined size.

WO 2010/050991 A1