



(51) International Patent Classification:
B29C 47/00 (2006.01)

(21) International Application Number:
PCT/EP2010/068772

(22) International Filing Date:
2 December 2010 (02.12.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09306187.7 4 December 2009 (04.12.2009) EP

(71) Applicant (for all designated States except US): **SHELL INTERNATIONALE RESEARCH MAATSCHAPPIJ B.V.** [NL/NL]; Carel van Bylandtlaan 30, NL-2596 HR The Hague (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **DE AMORIM NOVAIS DA COSTA NOBREGA, João Miguel** [PT/PT]; AV.D. JOÃO II, No 62,2 D-Nogueiró, 4715-304 Braga (PT). **DIAS PESSOA, Eurico Filipe** [PT/PT]; Travessa da Boavista no 2, Mire de Tibães, 4700-565 Braga (PT). **GOMES COVAS, José António Colaço** [PT/PT]; Rua de Sub-Veigas, 14 Nogueiró, 7515-322 Braga (PT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:


— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: METHOD FOR PREPARING COATED BINDER UNITS AND DEVICE FOR USE THEREIN

Fig.1

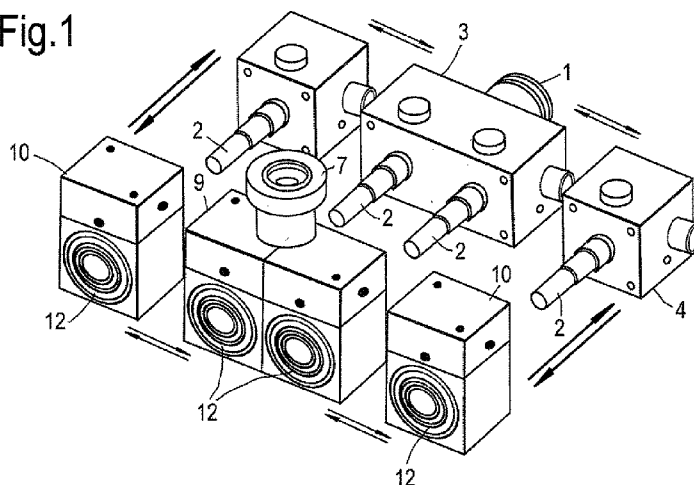

(57) Abstract: A method for preparing coated binder units wherein the coated binder units comprise a core of binder coated with a layer of coating material, wherein the binder is a bituminous binder or a synthetic binder comprising a resin, an oil and optionally a polymer, which method comprises the steps of : (a) supplying the binder and the coating material to an co-extrusion device which comprises an even number of pairs of inner and outer dies, whereby the binder is supplied to the inner dies and the coating material is supplied to the outer dies; (b) co-extruding the binder and the coating material by means of the co-extrusion device, thereby producing streams of extrudate in which the binder is coated with a layer of the coating material; and (c) optionally, shaping the streams of extrudate, into units of the coated binder. The invention further relates to the co-extrusion device.