

(51) International Patent Classification:
C23C 4/12 (2006.01)(21) International Application Number:
PCT/US2012/069807(22) International Filing Date:
14 December 2012 (14.12.2012)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/570,516 14 December 2011 (14.12.2011) US
61/570,532 14 December 2011 (14.12.2011) US(71) Applicant: PRAXAIR S.T. TECHNOLOGY, INC.
[US/US]; 411 Sackett Point Road, New Haven, CT 06473 (US).

(72) Inventors: PETORAK, Christopher A.; 664 Beaverbrook Drive, Carmel, IN 46032 (US). LEMEN, Don J.; 7655 Moran Court, Indianapolis, IN 46268 (US). FEUERSTEIN, Albert; 12862 Tuscan Blvd., Carmel, IN 46032 (US). LEWIS III, Thomas F; 345 W. Cedar Street, Zionsville, IN 46077 (US).

(74) Agent: DALAL, Nilay S.; Praxair, Inc., 39 Old Ridgebury Road, Danbury, CT 06810 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,

KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(88) Date of publication of the international search report:
8 August 2013

(54) Title: REACTIVE GAS SHROUD OR FLAME SHEATH FOR SUSPENSION PLASMA SPRAY PROCESSES

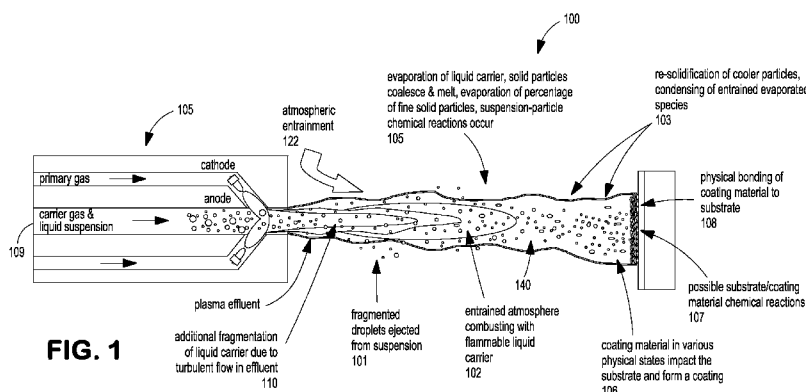


FIG. 1

(57) Abstract: A system and method for producing thermal spray coatings on a substrate from a liquid suspension is disclosed. The disclosed system and method include a thermal spray torch for generating a plasma and a liquid suspension delivery subsystem for delivering a flow of liquid suspension with sub-micron particles to the plasma to produce a plasma effluent. The liquid suspension delivery subsystem comprises an injector or nozzle which can produce a reactive gas shroud surrounding the plasma effluent. A flame envelope can also be used to isolate injection of the liquid suspension. The shroud or flame envelope can retain the sub-micron particles entrained within the plasma effluent and substantially prevent entrainment of ambient gases into the plasma effluent. The liquid suspension delivery subsystem can be arranged as an axial injection system, a radial internal injection system or an external radial injection system.