

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
20 November 2008 (20.11.2008)

PCT

(10) International Publication Number
WO 2008/140399 A1

(51) International Patent Classification:

F16L 5/04 (2006.01) *F16L 3/10* (2006.01)
A62C 2/04 (2006.01) *F16L 5/08* (2006.01)
A62C 3/16 (2006.01)

(21) International Application Number:

PCT/SE2008/050505

(22) International Filing Date: 5 May 2008 (05.05.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

0701182-8 16 May 2007 (16.05.2007) SE

(71) Applicant (for all designated States except US): **Roxtec AB**; P.O. Box 540, S-371 23 Karslkrona (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **ÅKESSON, Niklas** [SE/SE]; Bastionsgatan 12, S-371 32 Karlskrona (SE).

(74) Agent: **KARLSSON, Leif**; P.O. Box. 4188, P.O. Box. 4188, S-203 13 Malmö (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(54) Title: SEAL WITH FIRE PROTECTION

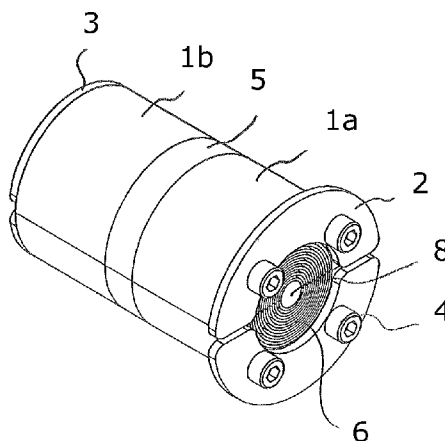


Fig. 1

(57) Abstract: The present invention concerns a seal for, pipe penetration or the like formed of two halves. The seal is to be received in a sleeve or opening of a wall or the like and forms a central opening for a pipe or tube when the seal halves are brought together. Each seal half is formed of two base parts (1a, 1b). Between the base parts (1a, 1b) a layer of intumescent material (5) is placed. On the inside of the base parts (1a, 1b) peelable layers (6) are arranged. The layers are peeled off to adapt the inner diameter of the seal to the pipe or tube received. In case of fire the intumescent material (5) will expand, which expansion will collapse and close off the pipe or tube received in the seal.

WO 2008/140399 A1