



(51) International Patent Classification:

E21B 33/12 (2006.01) *F16J 15/02* (2006.01)
F16J 15/10 (2006.01)

(21) International Application Number:

PCT/US2023/080996

(22) International Filing Date:

22 November 2023 (22.11.2023)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

18/501,400 03 November 2023 (03.11.2023) US

(71) Applicant: **HALLIBURTON ENERGY SERVICES, INC.** [US/US]; 3000 N. Sam Houston Parkway E., Houston, Texas 77032-3219 (US).

(72) Inventors: **THATATHIL, Sandeep**; 11 Tuas South Avenue 12, Singapore 637131 (SG). **GLAESMAN, Chad W.**; 11 Tuas South Avenue 12, Singapore 637131 (SG). **BHUDOLIA, Somen Kumar**; 11 Tuas South Avenue 12, Singapore 637131 (SG). **SINGH, Arpana**; 11 Tuas South Avenue 12, Singapore 637131 (SG).

(74) Agent: **TUMEY, Corey S**; P.O. Box 890226, Houston, Texas 77062-9998 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available):

AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available):

ARIPO (BW, CV, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: CHEMICAL RESISTANT ELASTOMERIC SEAL HAVING TWO ELASTOMERS

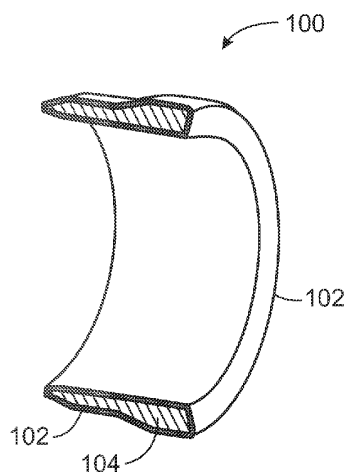


FIG. 1B

(57) Abstract: A variety of methods and apparatus are disclosed, including for a wellbore, in one embodiment, a downhole tool having an elastomeric component including an inside portion comprising a first elastomer and an outside portion comprising a second elastomer different than the first elastomer, wherein the outside portion encloses the inside portion, and wherein the second elastomer is more chemically resistant than the first elastomer to fluids in the wellbore.

