



- (51) **International Patent Classification:**
H05K 7/20 (2006.01) *F25D 1/02* (2006.01)
- (21) **International Application Number:**
PCT/NO2023/060031
- (22) **International Filing Date:**
14 August 2023 (14.08.2023)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
20220954 05 September 2022 (05.09.2022) NO
- (71) **Applicant:** ORCA CONNEX AS [NO/NO]; Marineveien 10b, 4632 KRISTIANSAND S (NO).
- (72) **Inventors:** **BORØ, Yngvar**; Ausvigheia 27, 4641 SØGNE (NO). **BERGE, Roar**; Hånestangen 5, 4635 KRISTIANSAND S (NO). **NÆSS, Andreas Hauland**; Harald Hårfagres vei 1a, 4633 KRISTIANSAND S (NO). **TOLLEVIK, Sigurd**; Harald Hårfagres vei 11, 4633 KRISTIANSAND S (NO).
- (74) **Agent:** HÅMSØ PATENTBYRÅ AS; Postboks 9, 4068 STAVANGER (NO).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, CV, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) **Title:** SYSTEM AND METHOD FOR DELIVERING COOLING WATER TO SUBMERGED DATA PROCESSING EQUIPMENT

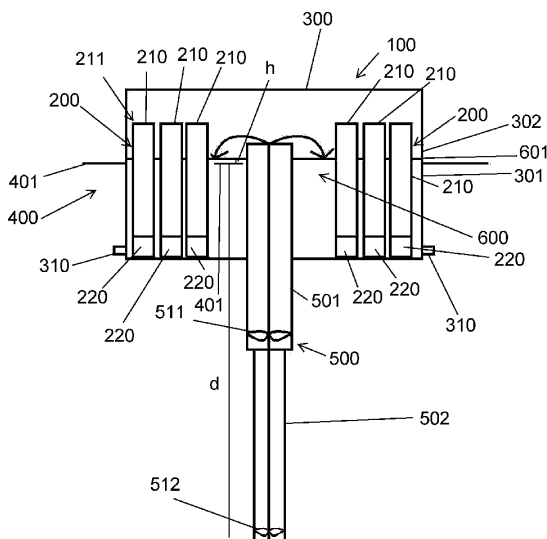


Fig. 1

(57) **Abstract:** A system (100) for cooling at least one computing device using water, the system (100) comprising: a body of water (400) defining a first waterline (401); a structure (300) at least partially submerged in the body of water (400) and comprising: an internal volume of water (600) defining a second waterline (601); at least one outlet (310) configured to drain water from the internal volume of water (600) to the body of water (400); a container (210) at least partially submerged in the internal volume of water (600) and comprising at least one computing device configured to generate heat in use; an inlet pipe (500) configured with a pump (511) to move water from the body of water (400) to the internal volume of water (600); and a flow path of water across the container (210) towards the at least one outlet (310); wherein the second waterline (601) is at a height above the first waterline (401) such that there is an overpressure in the internal volume (600) to drive the flow path to provide cooling of the container (210) and at least one computing device therein.

[Continued on next page]

Published:

- with international search report (Art. 21(3))
- in black and white; the international application as filed contained color or greyscale and is available for download from PATENTSCOPE