

## CORRECTED VERSION

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
22 January 2004 (22.01.2004)


PCT

(10) International Publication Number  
**WO 2004/008654 A1**

- (51) International Patent Classification<sup>7</sup>: **H04B 1/66**
- (21) International Application Number:  
PCT/US2003/021714
- (22) International Filing Date: 11 July 2003 (11.07.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
60/396,363 15 July 2002 (15.07.2002) US  
10/291,320 8 November 2002 (08.11.2002) US
- (71) Applicant: **APPLE COMPUTER, INC.** [US/US]; One Infinite Loop, Mail Stop: 38-PAT, Cupertino, CA 95014 (US).
- (72) Inventors: **HASKELL, Barin, G.**; 1190 Fairbrook Dr., Mountain View, CA (US). **SINGER, David, W.**; 268 Wawona Street, San Francisco, CA (US). **DUMITRAS, Adriana**; 250 W. El Camino Real, Apt. 2403, Sunnyvale, CA (US). **PURI, Atul**; 19500 Prunedge Av, # 4203, Cupertino, CA (US).
- (74) Agent: **JOHANSEN, Dag**; Stattler Johansen & Adeli LLP, P.O. Box 51860, Palo Alto, CA 94303-0728 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**  
— with international search report

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR VARIABLE ACCURACY INTER-PICTURE TIMING SPECIFICATION FOR DIGITAL VIDEO ENCODING

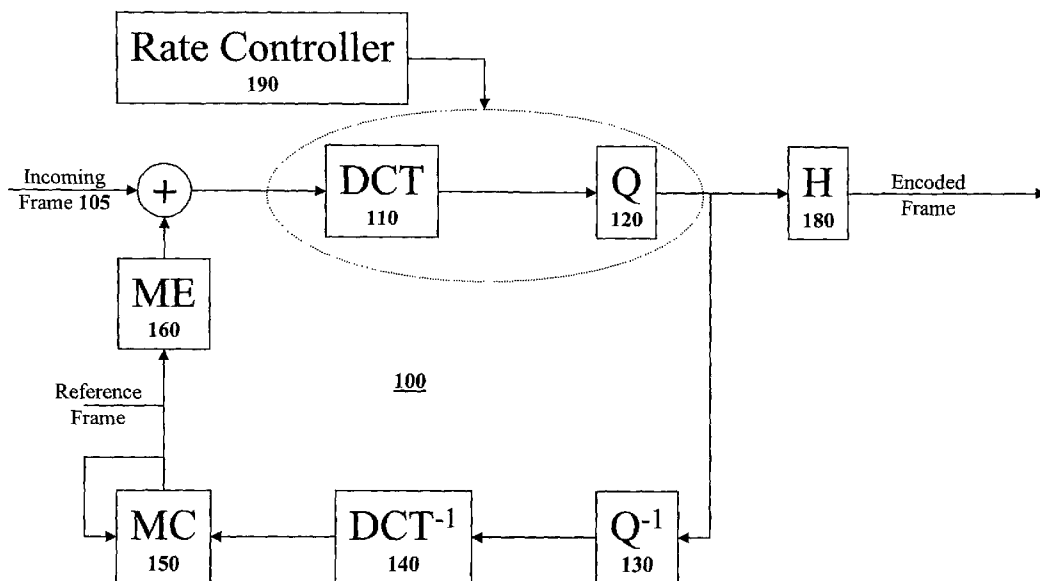

(57) Abstract: A method and apparatus for variable accuracy inter-picture timing specification for digital video encoding is disclosed. Specifically the present invention discloses a system that allows the relative timing of nearby video pictures to be encoded in a very efficient manner. In one embodiment, the display time difference between a current video picture (105) and a nearby video picture is determined. The display time difference is then encoded (180) into a digital representation of the video picture. In a preferred embodiment, the nearby video picture is the most recently transmitted stored picture. For coding efficiency, the display time difference may be encoded using a variable length coding system or arithmetic coding. In an alternate embodiment, the display time difference is encoded as a power of two to reduce the number of bits transmitted.

WO 2004/008654 A1



**(48) Date of publication of this corrected version:**

24 June 2004

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**(15) Information about Correction:**

see PCT Gazette No. 26/2004 of 24 June 2004, Section II