



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : H04H		A2	(11) International Publication Number: WO 00/49743
			(43) International Publication Date: 24 August 2000 (24.08.00)
(21) International Application Number: PCT/US00/02809 (22) International Filing Date: 4 February 2000 (04.02.00) (30) Priority Data: 09/253,117 19 February 1999 (19.02.99) US (71) Applicant (for all designated States except US): CHAINCAST INC. [US/US]; 3055 Paseo Vista Avenue, San Martin, CA 95046 (US). (71)(72) Applicant and Inventor: KIRALY, Jozsef [HU/US]; 3055 Paseo Vista Road, San Martin, CA 95046 (US). (74) Agents: GALLENSON, Mavis, S. et al.; Ladas & Parry, 5670 Wilshire Blvd., Suite 2100, Los Angeles, CA 90036-5679 (US).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published Without international search report and to be republished upon receipt of that report.	




G00001

(54) Title: METHOD AND SYSTEM FOR TRANSMITTING INFORMATION

(57) Abstract

A method and system for performing chaincast communication to multiple communication systems within a system of coupled electronic devices. In one implementation the electronic devices can be computer systems and the systems of coupled electronic devices include the Internet. The present invention provides a system wherein a broadcast source communicates broadcast information (e.g., encoded audio radio content, encoded audio/video television content, program instructions, etc.) to a first group of electronic devices. The first group of electronic devices can be instructed by a transmission scheduler to then communicate (e.g., forward) the broadcast information to other electronic devices which devices can also be instructed to communicate to more devices, etc., thereby reducing the bandwidth requirements of the communication channel between the broadcast source and the first group of electronic devices. Slight communication delays may be encountered by the transmission forwarding, but these delays can typically be tolerated in broadcast transmissions (e.g., radio content, television content, seminars, etc.). The transmission scheduler, coupled to the Internet, is used to track and manage which devices are forwarding broadcast information to which other devices. The transmission scheduler is able to re-route communications when one or more devices terminates or to provide better communication load sharing across the system. The communication is "chaincast" because the forwarding from one device to another, etc., creates a logical communication "chain" from the broadcast server to the receiving devices.

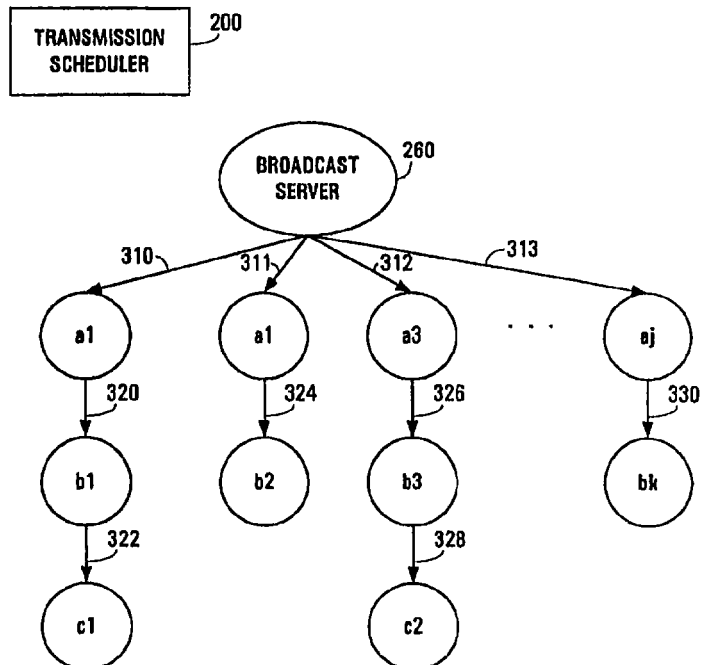

162162