

(12) 特許協力条約に基づいて公開された国際出願

(19) 世界知的所有権機関
国際事務局

(43) 国際公開日
2022年3月3日(03.03.2022)



(10) 国際公開番号

WO 2022/044787 A1

(51) 国際特許分類:
A01K 87/06 (2006.01)

(21) 国際出願番号: PCT/JP2021/029411

(22) 国際出願日: 2021年8月6日(06.08.2021)

(25) 国際出願の言語: 日本語

(26) 国際公開の言語: 日本語

(30) 優先権データ:
特願 2020-144053 2020年8月28日(28.08.2020) JP


(71) 出願人: グローブライド株式会社(GLOBERIDE, INC.) [JP/JP]; 〒2038511 東京都東久留米市前沢3丁目14番16号 Tokyo (JP).

(72) 発明者: 金子 京市 (KANEKO Kyoichi); 〒2038511 東京都東久留米市前沢3丁目14番16号 グローブライド株式会社内 Tokyo (JP). 加藤 好尚 (KATO Yoshinao); 〒2038511 東京都東久留米市前沢3丁目14番16号 グローブライド株式会社内 Tokyo (JP). 秋葉 勝 (AKIBA Masaru); 〒2038511 東京都東久留米市前沢3丁目14番16号 グローブライド株式会社内 Tokyo (JP).

(74) 代理人: 今村 光広 (IMAMURA Mitsuhiro); 〒1056328 東京都港区虎ノ門1-23-1 虎ノ門ヒルズ森タワー28階 K & L G A T E S 外国法共同事業法律事務所 Tokyo (JP).

(54) Title: REEL SEAT

(54) 発明の名称: リールシート

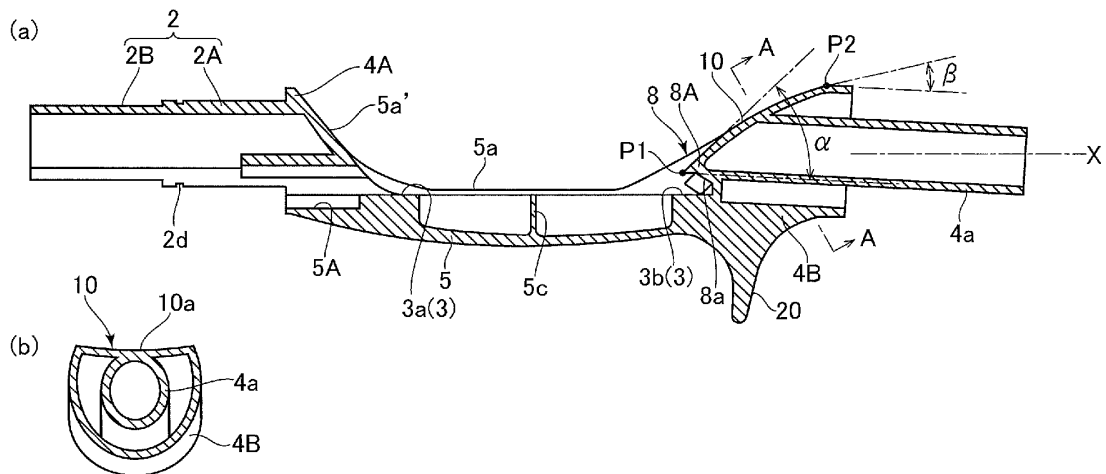

(57) Abstract: Provided is a reel seat that enables a series of operations to be performed smoothly when a fishing rod is gripped and held with a fishing reel. In a reel seat 1 according to the present invention, the position of a reel leg placement part 3 for placing a reel leg of a fishing reel is offset downward relative to the central position of a rod. An inclined surface 10 that connects the upper end of a hood part that defines an opening of a fixing hood and a grip upper surface to be gripped on the back side of a fishing reel, which is mounted on and fixed to the reel leg placement part, is provided on the back side of the fishing reel. When viewed from the side, the inclined surface 10 is formed to rise from the upper end

[続葉有]

(81) 指定国(表示のない限り、全ての種類の国内保護が可能): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) 指定国(表示のない限り、全ての種類の広域保護が可能): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), ユーラシア (AM, AZ, BY, KG, KZ, RU, TJ, TM), ヨーロッパ (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

添付公開書類:

一 国際調査報告(条約第21条(3))

of the hood part toward the grip upper surface at an inclination angle α of not exceeding 45° , and descend from the grip upper surface at an inclination angle β of not exceeding 35° .

(57) 要約: 魚釣り用リールと共に釣竿を握持、保持した際、一連の操作をスムーズに行なえるリールシートを提供する。本発明のリールシート1は、魚釣り用リールのリール脚を載置するリール脚載置部3の位置が、竿杆の軸心位置に対して落ち込む方向にオフセットしている。リール脚載置部に装着、固定される魚釣り用リールの後方側に、固定フードの開口部を規定するフード部の上端位置から魚釣り用リールの後方で握持されるグリップ上面までを連結する傾斜面10を備えており、傾斜面10は、側面視した際、前記フード部の上端位置からグリップ上面に向けて立ち上がる傾斜角度 α が 45° を超えないように形成され、かつ、グリップ上面から下降する傾斜角度 β が 35° を超えないように形成されている。