

2003045283

22/08/03



162162

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
12 September 2002 (12.09.2002)

PCT

(10) International Publication Number
WO 02/070963 A1

(51) International Patent Classification: F24F 13/062

(21) International Application Number: PCT/IN02/00033

(22) International Filing Date: 28 February 2002 (28.02.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
219/MUM/01 2 March 2001 (02.03.2001) IN

GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (G11. GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant and

(72) Inventor: MHATRE, Ramesh, Nana [IN/IN]; B-701 Centre Point, Panch Pakhadi, Thane 400 602, Maharashtra (IN).

Published:


— with international search report

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A NEW DIFFUSER IN CENTRAL AIR CONDITIONING SYSTEM

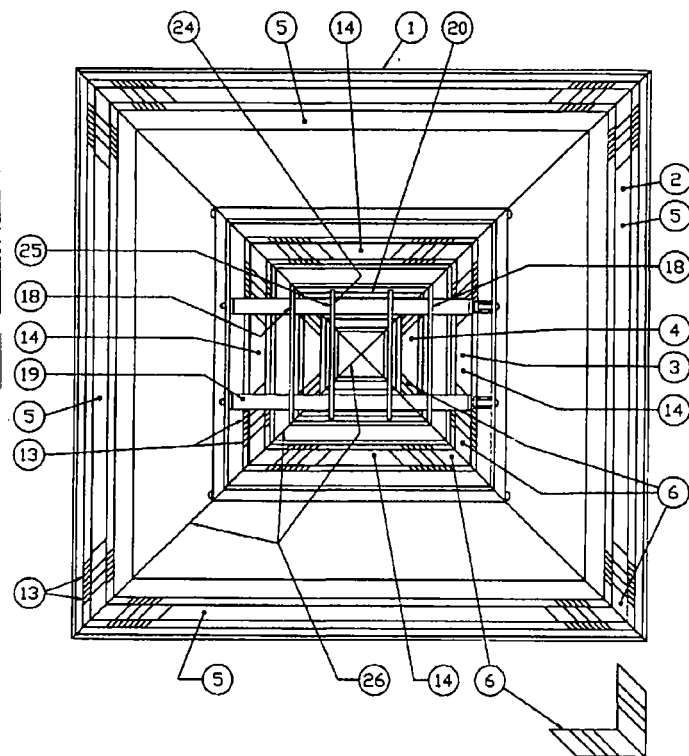

(57) Abstract: An improved diffuser (27) for central Air Conditioning system comprising of a single piece centre core (30) at least one intermediate core (29) and an outer frame, (28) the single piece centre core consisting of an outwardly and downwardly directed slanting surface (35) originating from a centre point and ending into a substantially horizontal flange at its bottom periphery, a pair of vertical strips (36) attached at the back side of the slanting surface in spaced apart relationship and opposing to each other, at least a pair of spaced apart holes (25) provided in each vertical strips, the said intermediate core consisting of vertical collar (31) at its top, an outwardly and downwardly directed slanting surface (16) ending into a substantially horizontal flange (17) at its bottom, at least a pair of holes (25) provided into two opposing vertical sides (34) of the said collar, the said outer frame consisting of a vertical collar (7) at the top, an outwardly downwardly directed slanting surface (9) ending into a substantially horizontal flange (10), at least a pair of holes provided in two opposing sides of the said collar and at least one pair of rods (19) passing through the said holes for attaching the said centre core to the said intermediate core and said outer frame.

WO 02/070963 A1



ACTION