(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
26 June 2003 (26.06.2003)

PCT

(10) International Publication Number
WO 03/051783 A1

(51) International Patent Classification[7]: C03B 17/06

(21) International Application Number: PCT/US02/39445

(22) International Filing Date:
10 December 2002 (10.12.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/341,199 14 December 2001 (14.12.2001) US

(71) Applicant: **CORNING INCORPORATED** [US/US]; 1 Riverfront Plaza, Corning, NY 14831 (US).

(72) Inventors: **FENN, Philip M**; 1560 Caton Road, Corning, NY 14830 (US). **FISK, John T**; 169 Orchard Hill Road, Elmira, NY 14903 (US). **RHOADS, Randy O**; 29 Algonquin Drive, Horseheads, NY 14845 (US).

(74) Agent: **BEALL, Thomas R**; Corning Incorporated, SP TI 3 1, Corning, NY 14831 (US).


(81) Designated States *(national)*: CN, JP, KR, SG.

Published:
— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

WO 03/051783 A1

(54) Title: APPARATUS AND METHOD FOR MAKING SHEET GLASS BY THE OVERFLOW DOWNDRAW FUSION PROCESS

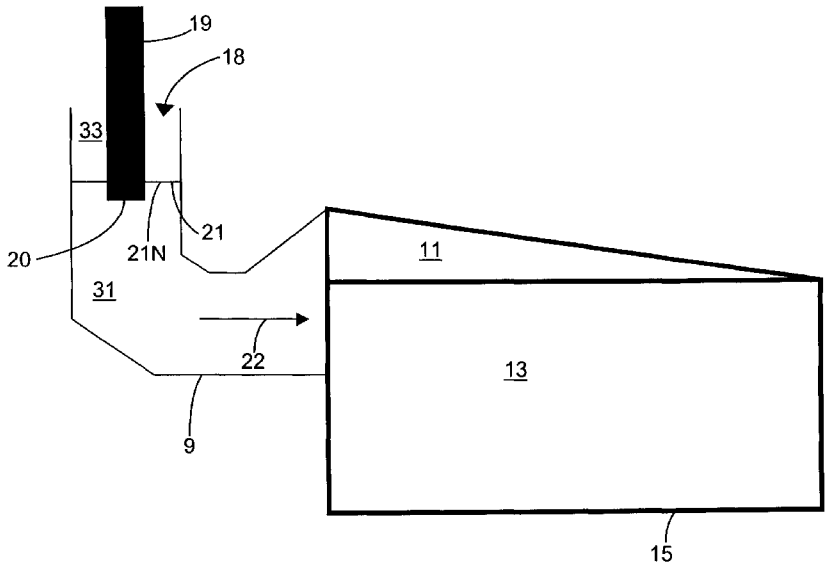

(57) Abstract: A molten glass delivery system for use in producing sheet glass by the overflow downdraw fusion process is provided. The delivery system includes a first conduit (9) which surrounds a portion of a second conduit (19) with a free surface (21) of molten glass (31) being formed between the two conduits. The first (9) and second (19) conduits are positioned with respect to one another so that the spatial relationship between the exit end (20) of the second conduit (19) and the free surface (21) results in neither substantial numbers of devitrification defects (27, 29) nor substantial numbers of blister defects (35) in finished sheets of devitrification sensitive glass, e.g., high silica LCD glass.