(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
28 March 2002 (28.03.2002)

PCT

(10) International Publication Number
WO 02/25722 A2

(51) International Patent Classification[7]: H01L 21/66

(21) International Application Number: PCT/GB01/04199

(22) International Filing Date:
19 September 2001 (19.09.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/234,088 20 September 2000 (20.09.2000) US

(71) Applicant: AXCELIS TECHNOLOGIES, INC. [US/US]; 55 Cherry Hill Drive, Beverly, MA 01915 (US).

(71) Applicant *(for CA only)*: EATON LIMITED [GB/GB]; P.O. Box 22, Norfolk Street, Worsley Road North, Worsley, Manchester M28 3ET (GB).

(72) Inventor: HALLING, Alfred, Michael; 36R Clark Street, Danvers, MA 01923 (US).


(74) Agent: BURKE, Steven, D.; R.G.C. Jenkins & Co., 26 Caxton Street, London SW1H 0RJ (GB).

(81) Designated States *(national)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States *(regional)*: ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,

[Continued on next page]

(54) Title: METHOD AND SYSTEM FOR DETERMINING PRESSURE COMPENSATION FACTORS IN AN ION IMPLANTER

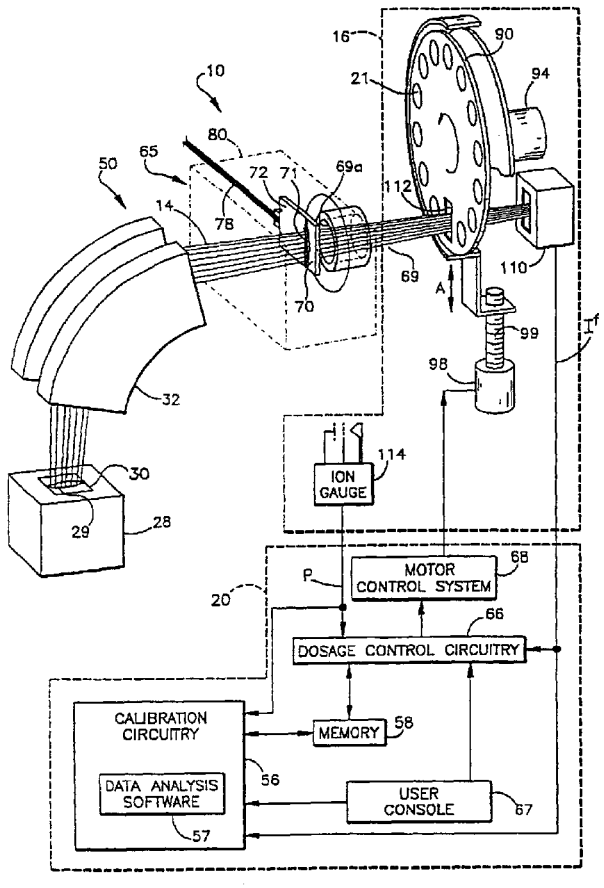

(57) Abstract: The invention provides a method and system for determining a pressure compensation factor for use in an ion implanter, which uses one or a small number of test workpieces (21). The method includes providing a test workpiece (21) in the ion implantation system (10), wherein the test workpiece (21) has at least one band region, assuming (302) a predicted pressure compensation factor (Kused), implanting (304) the at least one band region of the test workpiece (21) with an ion beam (14) using the ion implantation system (10) and the predicted pressure compensation factor (Kused) while measuring (306) ion beam current (Iimplanted) and a pressure (P) in the ion implantation system (10), measuring (308) a sheet resistance (Rs(measured)) associated with the implanted test workpiece (21), and determining (310) a pressure compensation factor (Kpredicted) according to the predicted pressure compensation factor (Kused), the measured sheet resistance (Rs(measured), the measured ion beam current (Iimplanted), and the measured pressure (P).

WO 02/25722 A2

CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished upon receipt of that report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.