



- (51) **International Patent Classification:**
H04L 1/18 (2006.01)
- (21) **International Application Number:**
PCT/IB2019/060371
- (22) **International Filing Date:**
02 December 2019 (02.12.2019)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
62/836,228 19 April 2019 (19.04.2019) US
- (71) **Applicant:** **TELEFONAKTIEBOLAGET LM ERICSSON (PUBL)** [SE/SE]; SE-164 83 Stockholm (SE).
- (72) **Inventors:** **KARAKI, Reem**; Adalbertsteinweg 45, 52070 Aachen (DE). **RUNE, Johan**; Terrängvägen 12, SE-181 29 Lidingö (SE). **LIU, Yuhang**; Särklandsgatan 3, SE-22474 Lund (SE). **FALAHATI, Sorour**; Wargentinsgatan 6, SE-112 29 Stockholm (SE).
- (74) **Agent:** **WESTOVER, Ben** et al.; 6300 Legacy Drive, M/S EVR 1-C-11, Plano, Texas 75024 (US).

DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:
— with international search report (Art. 21(3))

- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,

- (54) **Title:** SETTING HARQ TIMING FOR PDSCH WITH PENDING PDSCH-TO-HARQ-TIMING-INDICATOR

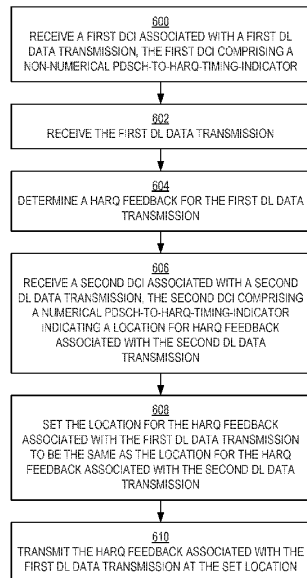


FIG. 6

(57) **Abstract:** Methods and systems for setting Hybrid Automatic Repeat Request (HARQ) timing for Physical Downlink Shared Channel (PDSCH) with a pending PDSCH-to-HARQ-timing-indicator (PHTI) are provided. In one aspect, a method performed by a wireless device comprises: receiving a first Downlink Control Information (DCI) associated with a first Downlink (DL) data transmission, the first DCI comprising a non-numerical PHTI; receiving the first DL data transmission; determining a HARQ feedback for the first DL data transmission; receiving a second DCI associated with a second DL data transmission, the second DCI comprising a numerical PHTI indicating a location for HARQ feedback associated with the second DL data transmission; setting the location of HARQ feedback associated with the first DL data transmission to be the same as the location of HARQ feedback associated with the second DL data transmission; and transmitting the HARQ feedback associated with the first DL data transmission at the set location.