



(51) International Patent Classification:
H05F 3/02 (2006.01)

(21) International Application Number:
PCT/MY2008/000198

(22) International Filing Date:
31 December 2008 (31.12.2008)

(25) Filing Language: English

(26) Publication Language: English

(72) Inventor; and

(71) Applicant : **KOW, Kek Hing** [MY/MY]; 15 Jalan Kesuma 2/2, Bandar Tasik Kesuma, 43700 Beranang, Selangor (MY).

(74) Agent: **TAN, Boon Leng**; BOON IP ENTERPRISE, D-8-8, Seri Puri, Jalan Aman, 52100 Kuala Lumpur (MY).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,

CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: ELECTROSTATIC DISCHARGE CHAIR COVER WITH A GROUNDING DISC

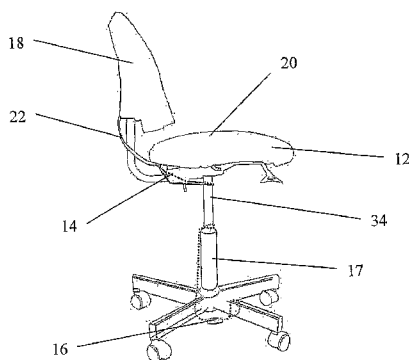


Fig. 1

(57) Abstract: Electrostatic discharge chair with a grounding disc suitable to be used on a swivel chair are described. The accessories comprise a static dissipative chair cover (12), flexible conductive ground loop (14) and grounding means (16). The flexible conductive ground loop (14) have an attaching means (24) attached with two flexible coiled springs, the first spring having an open end (26a) and the second spring having an open tapered (26b) end. The flexible conductive ground loop (14) is attached to chair cover (12) and wrapped around swivel post (34) by screwing one end of the spring into the other to provide a ground path from chair cover to swivel post. The grounding means (16) is attached to swivel post and in contact with ground to provide a ground path from swivel post to ground.



WO 2010/077126 A1