

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
9 December 2004 (09.12.2004)

PCT

(10) International Publication Number
WO 2004/106801 A1

- (51) International Patent Classification⁷: **F16L 55/165**
- (21) International Application Number:
PCT/EP2003/050776
- (22) International Filing Date: 31 October 2003 (31.10.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
03002310.5 3 February 2003 (03.02.2003) EP
- (71) Applicant (for all designated States except US): **NORDI-TUBE TECHNOLOGIES AB** [BE/BE]; Rue Ernest Solvay 181, B-4000 Liège/Sclessin (BE).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **DAVELOOSE, Frank** [BE/BE]; 17, rue Deru-Dehayes, B-4802 Verviers (BE). **BOLSEE, Hugues** [BE/BE]; 28, boîte n° 11, Avenue des Tilleuls, B-4802 Verviers (BE).
- (74) Agents: **KIHN, Pierre** et al.; Office Ernest T. Freylinger S.A., B.P. 48, L-8001 Strassen (LU).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: LINING MATERIAL FOR PIPELINES

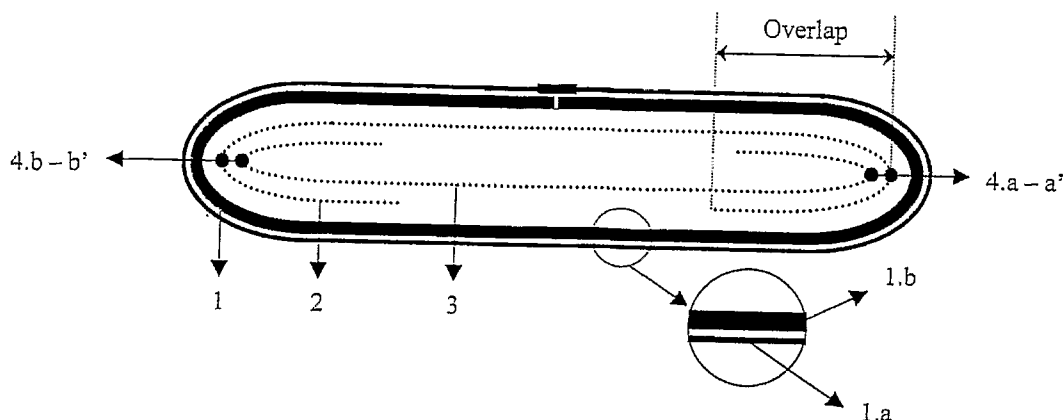

(57) Abstract: A tubular lining material for reinforcing pipelines, utilizable in a pipe-lining method wherein the tubular lining material, having a binder disposed on the inner surface thereof, is inserted into a pipeline and is allowed to advance within the pipeline as the tubular lining material is turned inside out under fluid pressure whereby the tubular lining material is applied to the inner surface of the pipeline with the binder being interposed between the pipeline and the tubular lining material, said tubular lining material comprising an outer layer of an impervious material and provided on the inside thereof with an inner reinforcing tubular jacket wherein the inner reinforcing tubular jacket comprises at least two sheets of high tensile strength and/or high modulus fibers and wherein the sheets overlap at least two locations and wherein said overlap portions extend in the lengthwise direction of the inner tubular jacket.

