

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
26 August 2004 (26.08.2004)

PCT

(10) International Publication Number
WO 2004/071539 A3

(51) International Patent Classification⁷: **A61F 13/15**

(21) International Application Number:
PCT/US2004/004349

(22) International Filing Date: 12 February 2004 (12.02.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
03002678.5 12 February 2003 (12.02.2003) EP

(71) Applicant (for all designated States except US): **THE PROCTER & GAMBLE COMPANY** [US/US]; One Procter & Gamble Plaza, Cincinnati, Ohio 45202 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BUSAM, Ludwig** [DE/DE]; Talstrasse 17, 65510 Hunstetten (DE). **BECKER, Uwe, Jurgen** [DE/DE]; Josef-Gebertz-Str. 4, 53881 Euskirchen (DE). **DIVO, Michael** [DE/DE]; Feldbergstr. 14, 61381 Friedrichsdorf (DE). **EHRNSPERGER, Bruno, Johannes** [DE/DE]; Bonner Strasse 5, 65812 Bad Soden (DE).

ENGEL, Roland [DE/DE]; Kelkheimer Strasse 8, 65843 Sulzbach/Ts (DE). **LINDNER, Torsten** [DE/DE]; Im Wiesental 17, 61476 Kronberg (DE).


(74) Common Representative: **THE PROCTER & GAMBLE COMPANY**; c/o T. David Reed, 6110 Center Hill Road, Cincinnati, OH 45224 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,

[Continued on next page]

(54) Title: THIN AND DRY DIAPER

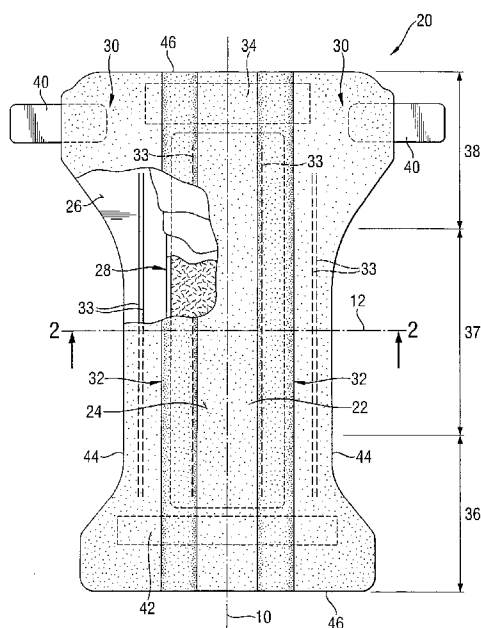

(57) Abstract: The present invention concerns an absorbent article, preferably a disposable absorbent article, such as a diaper. An absorbent core useful for an absorbent article is disclosed which imparts increased wearing comfort to the article and makes it thin and dry. Further disclosed is a process for obtaining such a core. Specifically disclosed is an absorbent core useful for an absorbent article comprising a substrate layer, the substrate layer comprising a first surface and a second surface, the absorbent core further comprising a discontinuous layer of absorbent material, the absorbent material comprising an absorbent polymer material, the absorbent material optionally comprising an absorbent fibrous material and the absorbent fibrous material not representing more than 20 weight percent of the total weight of the absorbent polymer material, the discontinuous layer of absorbent material comprising a first surface and a second surface, the absorbent core further comprising a layer of thermoplastic material, the layer of thermoplastic material comprising a first surface and a second surface and wherein the second surface of the discontinuous layer of absorbent material is in at least partial contact with the first surface of the substrate layer and wherein portions of the second surface of the layer of thermoplastic material are in direct contact with the first surface of the substrate layer and portions of the second surface of the layer of thermoplastic material are in direct contact with the first surface of the discontinuous layer of absorbent material. Further disclosed is a process for providing a storage layer for

an absorbent core useful in an absorbent article, the process comprising the steps of: - providing a substrate material comprising a first surface and a second surface - depositing absorbent material onto the first surface of the substrate material in a pattern, the pattern comprising at least one zone which is substantially free of absorbent material, and the pattern comprising at least one zone comprising absorbent material - depositing a thermoplastic material onto the first surface of the substrate material and the absorbent material, such that portions of the thermoplastic material are in direct contact with the first surface of the substrate and portions of the thermoplastic material are in direct contact with the absorbent material.

WO 2004/071539 A3



GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

(88) Date of publication of the international search report:
29 December 2004

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.