

2002044279

22 JUL 2002

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
2 August 2001 (02.08.2001)

PCT

(10) International Publication Number
WO 01/55675 A1

(51) International Patent Classification⁷: **G01C 19/56**,
G01P 9/04

(74) Agent: **ROONEY, Paul, Blaise**; BAE Systems plc, Group
IP Dept., Lancaster House, P.O. Box 87, Farnborough
Aerospace Centre, Farnborough, Hampshire GU14 6YU
(GB).

(21) International Application Number: PCT/GB01/00055

(22) International Filing Date: 8 January 2001 (08.01.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0001775.6 27 January 2000 (27.01.2000) GB

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,
TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,
CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): **BAE
SYSTEMS PLC** [GB/GB]; Warwick House, P O Box 87,
Farnborough Aerospace Centre, Farnborough, Hampshire
GU14 6YU (GB).

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **FELL, Christopher,
Paul** [GB/GB]; 7 Belgrave Road, Mutley, Plymouth, De-
von PL4 7DP (GB).

Published:


— with international search report

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*



162162

(54) Title: ANGULAR RATE SENSOR

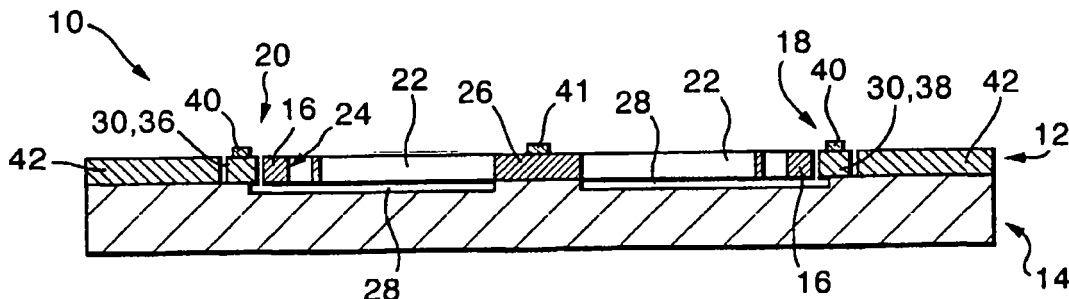

(57) Abstract: An angular rate sensor device (10) such as a micro-machined vibrating structure gyroscope, comprises a resonator (16), drive means (18), sensing means (20) and associated electronic control means. The resonator (16), drive means (18), sensing means (20) and control means are fabricated from a layer of crystalline silicon (12) having a [100] principal crystal plane. In order to make the resonator (16) operate in this type of material without degrading its performance, the resonator (16) is arranged to be operated by the drive and sensing means (18, 20) under the control of the electronic control means with a vibration mode pair having modal parameters, such as Young's Modulus, matched to provide a consistent resonator response. In particular, the resonator (16) is arranged to be operated with a Sin3θ/Cos3θ vibration mode pair providing degenerate carrier and response parameters.

WO 01/55675 A1



ACTION