

20/5/03
200205797-4 (A1)

(12)特許協力条約に基づいて公開された国際出願

(19) 世界知的所有権機関
国際事務局



G00002

(43) 国際公開日
2001年10月11日 (11.10.2001)

PCT


(10) 国際公開番号
WO 01/76032 A1

- (51) 国際特許分類: H02B 13/035
(21) 国際出願番号: PCT/JP00/02086
(22) 国際出願日: 2000年3月31日 (31.03.2000)
(25) 国際出願の言語: 日本語
(26) 国際公開の言語: 日本語
(71) 出願人 (米国を除く全ての指定国について): 株式会社日立製作所 (HITACHI, LTD.) [JP/JP]; 〒101-8010 東京都千代田区神田駿河台四丁目6番地 Tokyo (JP).
(72) 発明者; および
(75) 発明者/出願人 (米国についてのみ): 渡邊浩安 (WATANABE, Hiroyasu) [JP/JP]; 逸見 礼 (HENMI, Rei) [JP/JP]. 篠原 亮一 (SHINOHARA, Ryouichi) [JP/JP]. 三次良一 (MITSUGI, Ryouichi) [JP/JP]. 伊藤 俊二 (ITO, Shunji) [JP/JP]; 〒316-0035 茨城県日立市国分町一丁目1番1号 株式会社日立製作所 国分事業所内 Ibaraki (JP).
(74) 代理人: 弁理士 作田康夫 (SAKUTA, Yasuo); 〒100-8220 東京都千代田区丸の内一丁目5番1号 株式会社日立製作所内 Tokyo (JP).
(81) 指定国 (国内): CN, JP, KR, SG, US.
(84) 指定国 (広域): ヨーロッパ特許 (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).
添付公開書類:
— 国際調査報告書

[続葉有]

(54) Title: GAS INSULATED SWITCHGEAR

(54) 発明の名称: ガス絶縁開閉装置

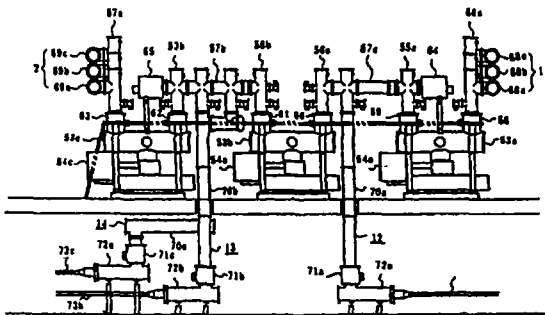

(57) Abstract: A gas insulated switchgear which enables the reduction of its installation area while its installation height is suppressed. A bus-bar interlinking line which connects a pair of main bus-bars facing each other to each other and is provided between the main bus-bars so as to be perpendicular to the main bus-bar is formed by providing, in parallel to each other along the main bus-bars, three sets, each set consisting of three horizontal breaker units connected in series to each other. Each main bus-bar is composed of three bus-bar units which are provided in parallel with each other along the part of the bus-bar interlinking line which extends in a vertical direction from its end part.

(57) 要約:

据付高さを低く抑えながら据付面積を低減できるガス絶縁開閉装置を提供するために本発明は、対向配置された一对の主母線間を接続すると共に主母線に対して直交するように主母線間に配置される母線連絡回線が、横置き of 遮断器ユニットを三つ直列接続したものを主母線に沿って三つ並設して構成され、主母線のそれぞれが、母線連絡回線の端部から鉛直方向に延伸する部分に沿って母線ユニットを三つ並設して構成されている。

WO 01/76032 A1



162162

WO 01/76032 A1

本コード及び他の略語については、定期発行される
本コードセットの巻頭に掲載されている「コードと略語
の対照表」を参照。