



- (51) **International Patent Classification:**
E04H 4/12 (2006.01) *E04H 4/14* (2006.01)
- (21) **International Application Number:**
PCT/IB2014/064824
- (22) **International Filing Date:**
25 September 2014 (25.09.2014)
- (25) **Filing Language:** Italian
- (26) **Publication Language:** English
- (30) **Priority Data:**
MI2013A001588 26 September 2013 (26.09.2013) IT
- (71) **Applicant:** A&T EUROPE S.P.A. [IT/IT]; Via Solferino, 27, I-46043 Castiglione delle Stiviere (MN) (IT).
- (72) **Inventor:** COLLETTI, Roberto; Via Rovadella, 56, I-25080 Padenghe sul Garda (BS) (IT).
- (74) **Agent:** OTTAZZO, Marco; c/o Barzanò & Zanardo Milano S.p.A., Via Borgonuovo, 10, I-20121 Milano (IT).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** WATER OVERFLOW EDGE DEVICE FOR A SWIMMING POOL AND RELATIVE IMPROVED STRUCTURAL ELEMENT

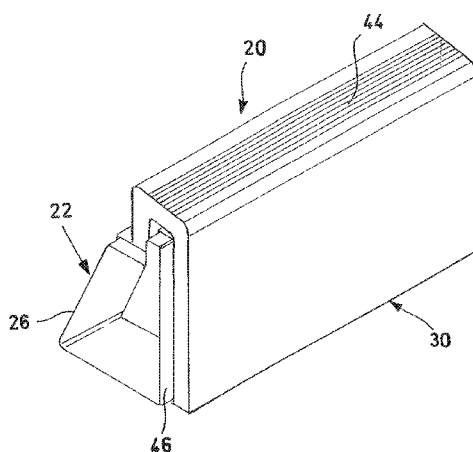


Fig.2

(57) **Abstract:** A water overflow edge device (10) for a swimming pool is described, comprising a channel (12) consisting of a bottom wall (14), a rear wall (16) and a front wall (18). The front wall (18) is made of a plurality of modular structural elements (20) arranged in sequence and coupled together "end-to-end". The channel (12) is also covered on top by a walking grid (50) that allows water of the swimming pool to enter into the channel (12) itself. Each modular structural element (20) consists of a first component (22) with structural function, provided at the bottom with coupling means (24) with the bottom wall (14) of the channel (12) and with the top of the vertical inner wall of the swimming pool. The structural component (22) is moreover provided at one side with a first surface (26), which forms the front wall (18) of the channel (12), and with a second substantially vertical surface (28), opposite the first surface (26) and configured to support a second coating component (30) which forms the entire exposed surface of the water overflow edge device (10) and which has a finishing function. Preferably, the first component (22) with structural function is made of a plastic material and the second coating component (30) is made of a ceramic material.

