



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 :

H04B 7/185

A1

(11) International Publication Number:

WO 99/40693

(43) International Publication Date:

12 August 1999 (12.08.99)

(21) International Application Number: PCT/US99/02333

(22) International Filing Date: 3 February 1999 (03.02.99)

(30) Priority Data:

60/073,619	4 February 1998 (04.02.98)	US
60/113,693	24 December 1998 (24.12.98)	US

(71) Applicant: FRIEDMAN, Robert, F. [US/US]; 4 Lover Lane, Fayetteville, GA 72701 (US).


(74) Agents: LIMBACH, George, C. et al.; Limbach & Limbach L.L.P., 2001 Ferry Building, San Francisco, CA 94111 (US).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published

*With international search report.**Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.*

(54) Title: METHOD AND APPARATUS FOR COMBINING TRANSPONDERS ON MULTIPLE SATELLITES INTO VIRTUAL CHANNELS

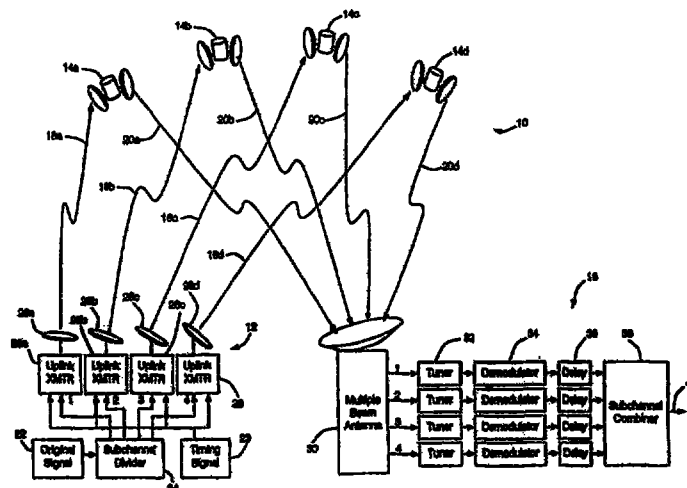

(57) Abstract

A satellite communications system provides an information channel between remotely located transmitters and receivers. A virtual satellite system provides the same service, but divides the signal either in power or in data content into subchannels such that any particular signal is conducted to the intended receiver via a plurality of traditional satellite channels. The receiving terminal (16) accepts the plurality of signals (26A, 26B, 26C, 26D) simultaneously from a possible plurality of satellites (14A, 14B, 14C, 14D), combining the subchannels comprising the virtual channel into the original signal content as if conducted via a single channel. The receiving antenna system (16) receives satellite subchannel signals (14A, 14B, 14C, 14D) from a plurality of directions using multiple antennas or a single antenna (30) with multi-direction capability. Prior to signal combining, the receiver (16) necessarily time-synchronizes the plurality of subchannels by introducing time delay in some channels before combining the subsignals into the original composite.