



(51) International Patent Classification:
G01N 9/00 (2006.01)

(21) International Application Number:
PCT/US2010/055587

(22) International Filing Date:
5 November 2010 (05.11.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/379,051 1 September 2010 (01.09.2010) US

(71) Applicant (for all designated States except US): **MICRO MOTION, INC.** [US/US]; 7070 Winchester Circle, Boulder, CO 80301 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **VAN CLEVE, Craig, Brainerd** [US/US]; 2921 Stagecoach Trail, P.O. Box 1382, Lyons, CO 80540 (US). **MACDONALD, George** [IE/GB]; 12 Russell Way, Winnersh Wokingham RG41 5SN (GB).

(74) Agents: **WILBERT, David, W.** et al.; The Ollila Law Group LLC, 2569 Park Lane, Suite 202, Lafayette, CO 80026 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

— as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: A VIBRATING DENSITOMETER INCLUDING AN IMPROVED VIBRATING MEMBER

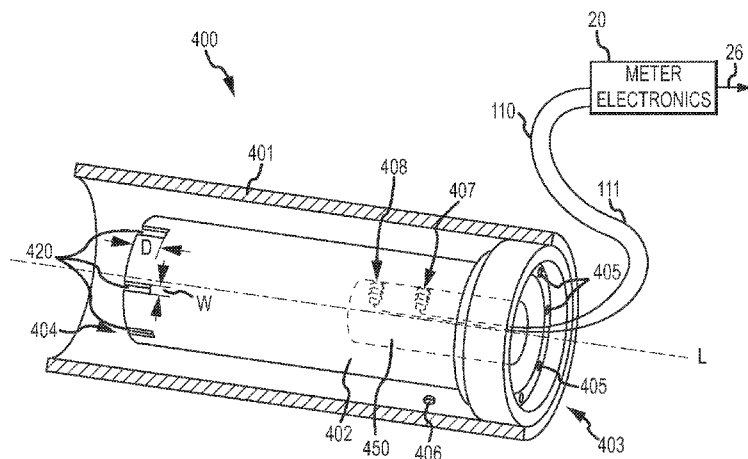


FIG. 4

(57) Abstract: An apparatus is provided that comprises a vibrating member (402). The vibrating member (402) is for a vibrating densitometer (400). The vibrating member (402) includes one or more apertures (420). The one or more apertures (420) are sized and located in the vibrating member (402) to increase a frequency separation between a resonant frequency of a desired vibrational drive mode and a resonant frequency of one or more undesired vibrational modes.

