



(51) International Patent Classification:
E03F 5/02 (2006.01) *E03F 5/04* (2006.01)

(21) International Application Number:
PCT/IB2009/056038

(22) International Filing Date:
29 October 2009 (29.10.2009)

(25) Filing Language: Dutch

(26) Publication Language: English

(30) Priority Data:
1036127 29 October 2008 (29.10.2008) NL
1037148 24 July 2009 (24.07.2009) NL

(71) Applicant (for all designated States except US): **WAVIN B.V.** [NL/NL]; Stationsplein 3, NL-8011 CW Zwolle (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **VAN DIJK, Berend Jan** [NL/NL]; Schuineslootweg 138, NL-7777 ST Schuinesloot (NL). **JAGER, Harm Jantinus Marcel** [NL/NL]; Hoofdweg 32-a, NL-7676 AG Westerhaar-Vriezenveensewijk (NL). **BRÜMMER, Günter Bernhard** [DE/DE]; Gerhard-Hauptmann-Strasse 9, 49740 Haselünne (DE). **ELZINK, Willem Johan** [NL/NL]; De Aak, NL-7701 LD Dedemsvaart (NL). **MADSEN, Frede** [DK/DK]; Vestervangsvej 24, DK-8450 Hammel (DK).

ALFERINK, Franciscus Johannes Maria [NL/NL]; Schoonhetenseweg 2, NL-8106 AE Marienheem (NL).

(74) Agents: **WIEDEMANN, Peter (HOFFMANN · EITLE)** et al.; Arabellastrasse 4, 81925 München (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: PLASTIC DRAIN OR INSPECTION CHAMBER PORTION WITH HOLLOW-WALLED CIRCUMFERENTIAL WALL, AS WELL AS MOULD ASSEMBLY FOR THEREOF

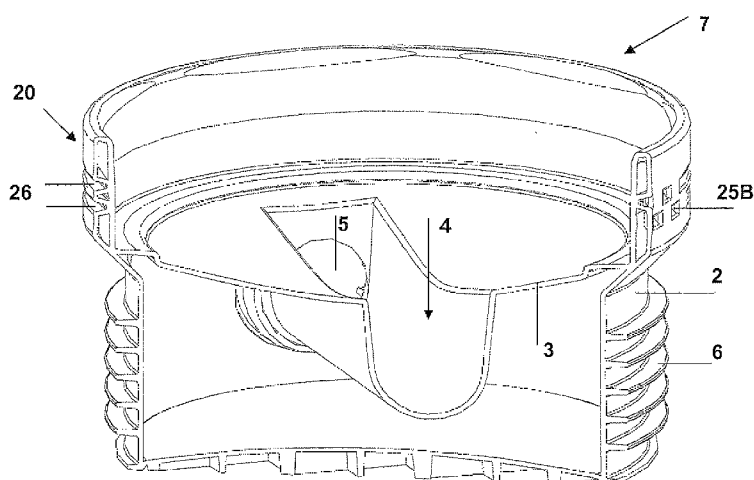


FIG. 2

(57) Abstract: The invention -relates to a drain or a portion of an inspection chamber, and a mould assembly for manufacturing thereof. The drain or the inspection chamber portion comprises a plastic circumferential wall, which circumferential wall, in the case of the drain, is preferably provided with openings for connection of the drain to one or more pipes. The drain or the inspection chamber portion can be manufactured by rotation moulding. The circumferential wall comprises a hollow-walled section provided with an internal wall and an external wall, wherein the internal wall and the external wall are locally abutted against each other for formation of reinforcements. These reinforcements are arranged such that they jointly span the entire hollow-walled section, seen in circumferential direction, yet without forming therewith one continuous abutment between the internal wall and the external wall.

**Published:****(88) Date of publication of the international search report:**

24 June 2010

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*