

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
8 February 2007 (08.02.2007)

PCT

(10) International Publication Number
WO 2007/014440 A1

(51) International Patent Classification:
E02F 3/90 (2006.01) *B66F 11/04* (2006.01)

(21) International Application Number:
PCT/BE2006/000068

(22) International Filing Date: 16 June 2006 (16.06.2006)

(25) Filing Language: Dutch

(26) Publication Language: English

(30) Priority Data:
2005/0320 23 June 2005 (23.06.2005) BE

(71) Applicant (for all designated States except US): **DREDGING INTERNATIONAL N.V.** [BE/BE]; Scheldedijk 30, Haven 1025, B-2070 Zwijndrecht (BE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **CLYMANS, Etienne** [BE/BE]; Peeterstraat 43, B-2830 Willebroek (BE).

(74) Agent: **DE BAAT, Michiel Anton**; Arnold & Siedsma, Meir 24, B-2000 Antwerpen (BE).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DEVICE AND METHOD FOR CHANGING A SUCTION MOUTH

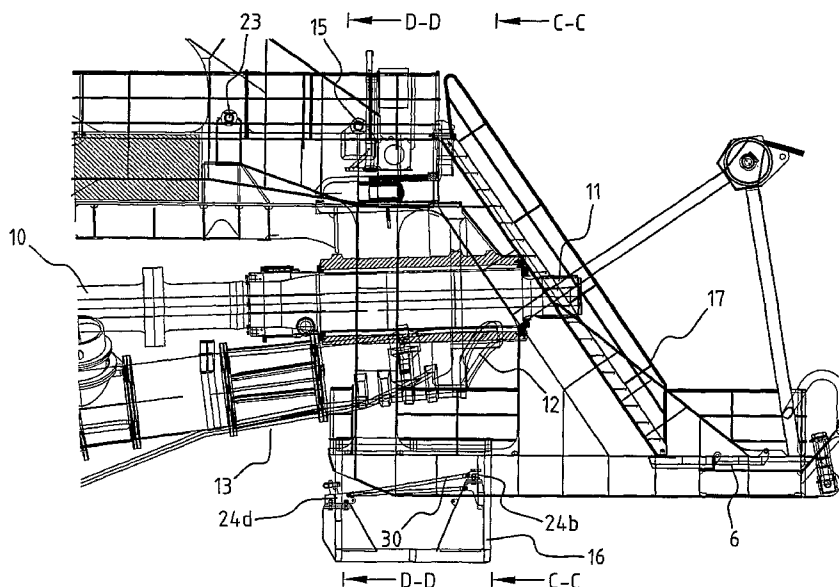

(57) Abstract: Device for changing a suction mouth of a cutter suction dredge of a vessel with cutter ladder (1), comprising a work platform (6) which, as seen in the transverse direction of the vessel, is provided substantially in the middle with an opening (18), wherein: a support structure (16) is provided which can be fixedly connected to the work platform (6) in a position substantially under the opening (18), which support structure (16) is adapted to support a suction mouth; the work platform (6) with support structure (16) is tiltable around a first, substantially horizontal transverse axis (23) between a substantially horizontal operating position and a high position in which the cutter ladder (1) can be moved upward, which positions are such that the work platform (6) with support structure (16) is movable from its high position to its operating when the cutter ladder (1) is situated in a high raised position.