



- (51) **International Patent Classification:**
H04N 19/107 (2014.01) *H04N 19/186* (2014.01)
H04N 19/159 (2014.01)
- (21) **International Application Number:**
PCT/US2020/016877
- (22) **International Filing Date:**
05 February 2020 (05.02.2020)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
62/802,515 07 February 2019 (07.02.2019) US
16/781,751 04 February 2020 (04.02.2020) US
- (71) **Applicant:** **QUALCOMM INCORPORATED** [US/US];
Attn: International IP Administration, 5775 Morehouse Drive,
San Diego, California 92121-1714 (US).
- (72) **Inventors:** **PHAM VAN, Luong**; 5775 Morehouse Drive,
San Diego, California 92121-1714 (US). **VAN DERAUW-**
ERA, Geert; 5775 Morehouse Drive, San Diego, California
92121-1714 (US). **RAMASUBRAMONIAN, Adarsh**
Krishnan; 5775 Morehouse Drive, San Diego, California
92121-1714 (US). **KARCZEWICZ, Marta**; 5775 More-
house Drive, San Diego, California 92121-1714 (US).
- (74) **Agent:** **DAWLEY, Brian**; Shumaker & Sieffert, P.A.,
1625 Radio Drive, Suite 300, Woodbury, Minnesota 55125
(US).
- (81) **Designated States** (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.
- (84) **Designated States** (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

(54) **Title:** INTER-INTRA PREDICTION MODE FOR VIDEO DATA

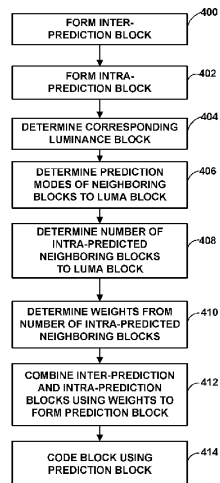


FIG. 8

(57) **Abstract:** An example device for coding (encoding or decoding) video data includes a memory for storing video data and one or more processors implemented in circuitry and configured to form an inter-prediction block for a current chrominance block of the video data; form an intra-prediction block for the current chrominance block of the video data; determine a number of neighboring blocks to a luminance block corresponding to the current chrominance block that are intra-prediction coded; determine a first weight and a second weight according to the number of neighboring blocks that are intra-prediction coded; apply the first weight to the inter-prediction block and the second weight to the intra-prediction block; combine the first weighted inter-prediction block and the second weighted intra-prediction block to form a prediction block for the current chrominance block; and code the current chrominance block using the prediction block.

Published:

— *with international search report (Art. 21(3))*