

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
29 August 2002 (29.08.2002)

PCT

(10) International Publication Number
WO 02/067469 A1

(51) International Patent Classification⁷: **H04B 15/00**,
H04K 1/00, H04L 27/30

Waterlily Drive, Southlake, TX 76092 (US). **MEIHOFFER, Eric**; 1200 Fuller Wiser Road, #432, Euless, TX 76039 (US).

(21) International Application Number: PCT/US01/48411

(74) Agents: **WATANABE, Hisashi, David** et al.; AN475, 600 North U.S. Highway 45, Libertyville, IL 60048 (US).

(22) International Filing Date:
14 December 2001 (14.12.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/736,755 14 December 2000 (14.12.2000) US

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.


(71) Applicant: **MOTOROLA INC.** [US/US]; 1303 East Algonquin Road, Schaumburg, IL 60196 (US).

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent

(72) Inventors: **SOUISSI, Slim**; 7130 Shoreline Drive, Apt. #1303, San Diego, CA 92122 (US). **DEHNER, Leo**; 1903

[Continued on next page]

(54) Title: MULTIPLE ACCESS FREQUENCY HOPPING NETWORK WITH INTERFERENCE AVOIDANCE

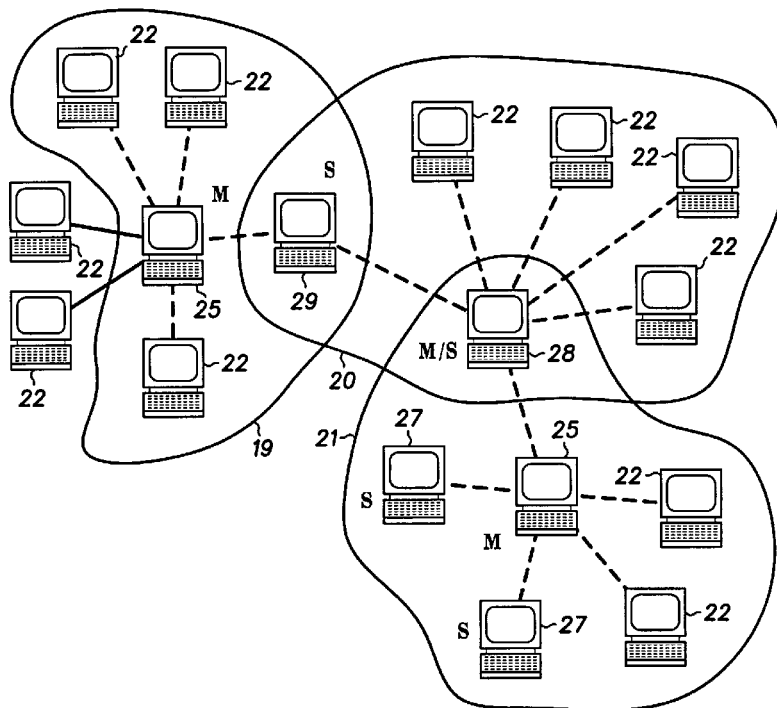

(57) Abstract: Spread spectrum packet-switching radio devices (22) are operated in two or more ad-hoc networks or pico-networks (19, 20, 21) that share frequency-hopping channels and time slots that may collide. The piconets (19, 20, 21) can be short range wireless associations of communicating devices (22), for example according to the Bluetooth, Home RF or similar industry protocols. One device in each piconet (19, 20, 21) is a synchronizing master (25) and others are slaves (27) that follow the master's frequency hopping sequence. The sequences (54) of two or more operating piconets (19, 20, 21), i.e., masters (25), occasionally coincide, which could cause simultaneous transmissions that interfere or collide. The frequency hopping sequences (54) of two or more masters (25) are exchanged using identity codes, permitting the devices to anticipate collision time slots (52). Priorities are assigned to the simultaneously operating piconets (19, 20, 21) during collision slots (52), e.g., as a function of their message queue size or latency, or other factors. Lower priority

devices may abstain from transmitting during predicted collision slots (52), and/or a higher priority device may employ enhanced transmission resources during those slots, such as higher error correction levels, or various combinations of abstinence and error correction may be applied. Collisions are avoided or the higher priority piconet (19, 20, 21) is made likely to prevail in a collision. Priorities are repetitively re-determined and re-assigned, to allocate communications resources among all the devices (22) and piconets (19, 20, 21).



WO 02/067469 A1



(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*