

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
12 June 2003 (12.06.2003)

PCT

(10) International Publication Number
WO 03/049086 A1

- (51) International Patent Classification⁷: **G11B 5/66** (72) Inventor; and
(75) Inventor/Applicant (for US only): **GIRT, Erol** [CA/US];
2704 College Avenue #4, Berkeley, CA 94705 (US).
(21) International Application Number: PCT/US02/20040
(22) International Filing Date: 26 June 2002 (26.06.2002) (74) Agents: **HANKINS, John, A.** et al.; McDermott, Will
& Emery, 600 13th Street, N.W., Washington, DC 20005-
3096 (US).
(25) Filing Language: English
(26) Publication Language: English (81) Designated States (national): CN, DE, GB, JP, KR, SG,
US.
(30) Priority Data: 60/337,287 30 November 2001 (30.11.2001) US Published:
— with international search report
(71) Applicant (for all designated States except US): **SEA- For two-letter codes and other abbreviations, refer to the "Guid-**
GATE TECHNOLOGY LLC [US/US]; 920 Disc Drive, ance Notes on Codes and Abbreviations" appearing at the begin-
P.O. Box 66360, Scotts Valley, CA 95067-0360 (US). ning of each regular issue of the PCT Gazette.

(54) Title: ANTI-FERROMAGNETICALLY COUPLED PERPENDICULAR MAGNETIC RECORDING MEDIA

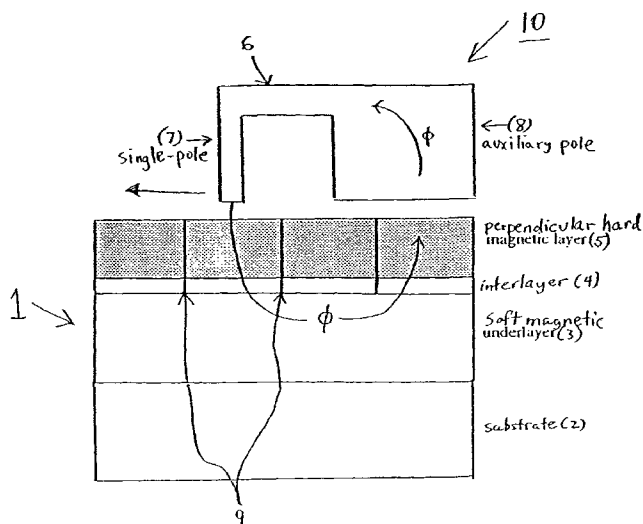

(57) Abstract: A high areal recording density, anti-ferromagnetically coupled ("AFC") perpendicular magnetic recording medium comprises: a layer stack formed over the surface of a non-magnetic substrate (2), comprising, in overlying sequence: an underlayer (3) comprised of a magnetically soft ferromagnetic material; at least one non-magnetic interlayer (4); a perpendicularly anisotropic stabilization layer (6) comprised of a hard ferromagnetic material; a non-magnetic spacer layer (7); and a perpendicularly anisotropic main recording layer (5) comprised of a hard ferromagnetic material; wherein the perpendicularly anisotropic stabilization layer (6) and the perpendicularly anisotropic main recording layer (5) are anti-ferromagnetically coupled (AFC) across the non-magnetic spacer layer (7) to orient the magnetic moments thereof anti-parallel and thereby provide the medium with increased SMNR and thermal stability.



WO 03/049086 A1