

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
5 April 2001 (05.04.2001)

PCT

(10) International Publication Number
WO 01/23125 A2

(51) International Patent Classification⁷: B23B 27/00

Hemel Hempstead, Hertfordshire HP1 1SZ (GB). DE
CAUWER, Jacques, Gilbert; 137, rue de l'Université,
F-75334 Paris Cedex 07 (FR). OSTAPARCHENKO,
George; 7 Golf Green Lane, Salem, SC 29676 (US).

(21) International Application Number: PCT/US00/26509

(22) International Filing Date:
27 September 2000 (27.09.2000)

(74) Agent: JOUNG, J., Kenneth; E.I. du Pont de Nemours
and Company, Legal Patent Records Center, 1007 Market
Street, Wilmington, DE 19898 (US).

(25) Filing Language: English

(26) Publication Language: English

(81) Designated States (*national*): CA, JP, KR, MX, SG.

(30) Priority Data:
60/156,168 27 September 1999 (27.09.1999) US

(84) Designated States (*regional*): European patent (AT, BE,
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,
NL, PT, SE).


(71) Applicant: E.I. DU PONT DE NEMOURS AND COM-
PANY [US/US]; 1007 Market Street, Wilmington, DE
19898 (US).

Published:
— Without international search report and to be republished
upon receipt of that report.

(72) Inventors: ALBERTONE, Yannick; 2, chemin du Pavil-
lon, P.O. Box 50, CH-1218 Le Grand Saconnex, Geneva
(CH). YOUNG, Mark, Andrew; 32 Sunnyhill Road,

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: LAMINATE STRUCTURE

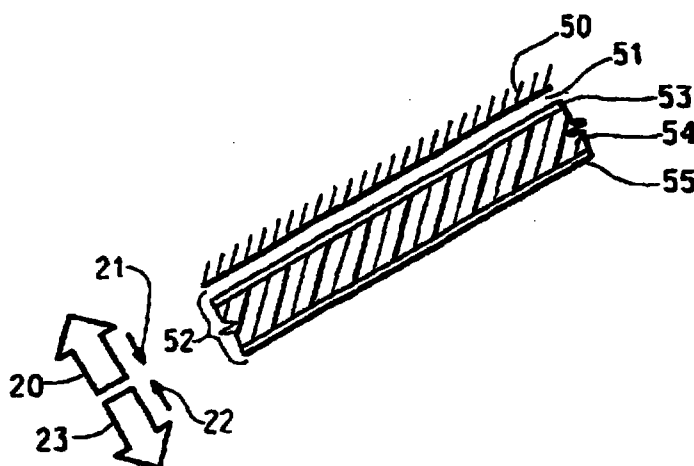

(57) Abstract: A substantially liquid impermeable moisture vapor permeable laminate structure comprising: (i) a substrate layer comprising a woven or non-woven material, (ii) a moisture vapor control layer attached to said substrate, (iii) a tie layer comprising one or more copolymers comprising from about 30 to about 90 weight percent ethylene co-monomer units and from about 10 to about 70 weight percent vinyl acetate co-monomer units, and (iv) a layer comprising one or more copolyetherester(s) in an amount of at least 50 weight percent based on the total amount of polymer in the layer. The moisture vapor transmission rate (MVTR) in the direction away from the copolyetherester-containing layer and tie layer and towards the substrate is preferably greater than the MVTR in the direction away from the substrate layer and towards the tie layer and copolyetherester-containing layer.