

(19) World Intellectual Property Organization
International Bureau



G00002

(43) International Publication Date
6 December 2001 (06.12.2001)

PCT

(10) International Publication Number
WO 01/92142 A1

(51) International Patent Classification⁷: **B67D 1/06, 1/14**

(21) International Application Number: PCT/NL01/00423

(22) International Filing Date: 31 May 2001 (31.05.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
1015368 31 May 2000 (31.05.2000) NL

(71) Applicant (for all designated States except US):
HEINEKEN TECHNICAL SERVICES B.V. [NL/NL];
P.O. Box 510, NL-2380 BB Zoeterwoude (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **VAN DER
KLAAUW, Guido, Petrus, Johannes** [NL/NL]; Elzenhof

28, NL-2382 EV Zoeterwoude (NL). **BAX, Bart, Jan**
[NL/NL]; Molenstraat 11a, NL-2513 BH Den Haag (NL).
VAN DUUREN, Marius, Corstiaan [NL/NL]; Limes 80,
NL-3176 TE Poortugaal (NL).


(74) Agent: **JORRITSMA, Ruurd**; Nederlandsch Octrooi-
bureau, Scheveningseweg 82, P.O. Box 29720, NL-2502 LS
The Hague (NL).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK,
SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA,
ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European

[Continued on next page]

(54) Title: DRINK DISPENSER ASSEMBLY AND CONTAINER FOR DRINK AND DRINK DISPENSING LINE

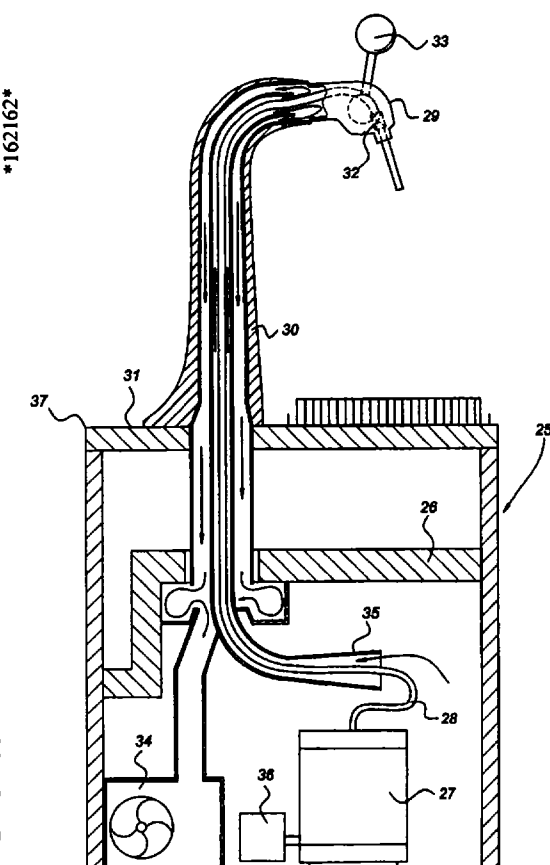

(57) Abstract: The invention relates to a drink dispenser assembly (1, 25) comprising: a dispenser device (2, 37) provided with a dispensing head (18, 29) for accommodating a dispensing line (17, 28), and a container (7, 27) containing drink, in particular carbonated drink, connected during use to the dispensing line (17, 28) which has a coupling element at an outlet end for connection to the dispensing head (18, 29). The drink dispenser assembly is characterised in that the coupling element comprises a shut-off valve (19, 32) that can be closed when placing the outlet end of the dispensing line (17, 28) into the dispensing head (18, 29) and, respectively, removing the outlet end of the dispensing line (17, 28) from the dispensing head (18, 29).

WO 01/92142 A1



(A2)

patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*