



(43) International Publication Date  
3 September 2009 (03.09.2009)

(10) International Publication Number  
**WO 2009/108123 A1**

(51) International Patent Classification:  
*G06F 3/033* (2006.01) *G06T 7/00* (2006.01)

(74) Agent: **LAWRENCE Y D HO & ASSOCIATES PTE LTD**; 30 Bideford Road, #02-02, Thongsia Building, Singapore 229922 (SG).

(21) International Application Number:  
PCT/SG2008/000070

(22) International Filing Date:  
29 February 2008 (29.02.2008)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US):  
**NANYANG POLYTECHNIC [SG/SG]**; 18 Ang Mo Kio, Avenue 8, Singapore 569830 (SG).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **CHAN, Yew Meng** [SG/SG]; 20 Chuan Drive, Singapore 554866 (SG).  
**CHING, Wee Soon** [SG/SG]; 26 Ashwood Grove, Singapore 739964 (SG).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

[Continued on next page]

(54) Title: LASER POINTER BASED INTERACTIVE DISPLAY SYSTEM AND METHOD THEREOF

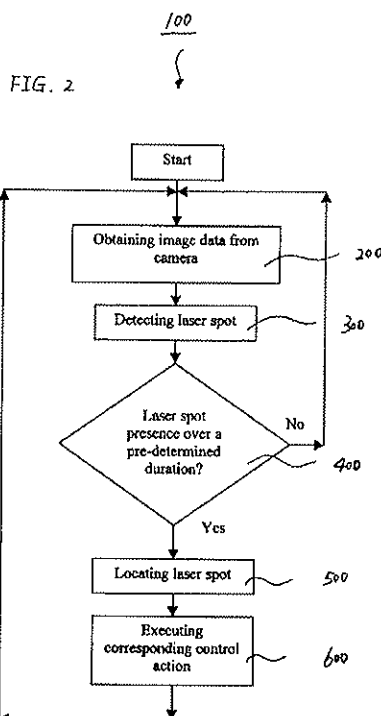

(57) Abstract: The present invention provides a process executable by a display control system for detecting an interactive signal provided by a laser pointer on the display surface with respect to a projected image, and performing a control action in response. The interactive signal is detected by a change detection algorithm, and verified according to its dominant color ratio and aspect ratio. The control action is actuated only if the interactive signal is continuously detected by the system for a pre-determined time.

**WO 2009/108123 A1** 

---

MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI **Published:**  
(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, — *with international search report (Art. 21(3))*  
NE, SN, TD, TG).