

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
5 April 2001 (05.04.2001)

PCT

(10) International Publication Number
WO 01/23764 A1

(51) International Patent Classification⁷: F04D 29/42,
F24F 7/007, F04D 29/66, F24F 3/16, B01D 46/10

(21) International Application Number: PCT/SG99/00097

(22) International Filing Date:
30 September 1999 (30.09.1999)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): KY-
ODO-ALLIED INDUSTRIES PTE LTD [SG/SG]; 17
Kian Teck Road, Singapore 628771 (SG).

(72) Inventor; and

(75) Inventor/Applicant (for US only): LEE, Zong, Tang
[SG/SG]; 17 Kian Teck Road, Singapore 628771 (SG).

(74) Agent: BIH LI & LEE; CPF Building, 79 Robinson Road
#24-01, Singapore 068897 (SG).

(81) Designated States (national): AL, AM, AT, AU, AZ, BA,
BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES,
FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG,
MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE,
SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN,
YU, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent
(AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent
(AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU,
MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— With international search report.

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: APPARATUS FOR MINIMISING NOISE IN A FAN UNIT

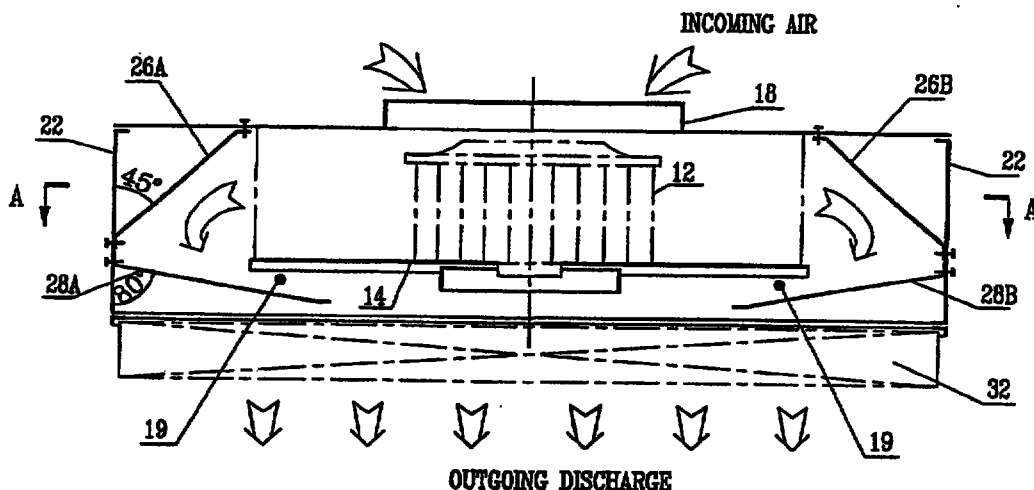

(57) Abstract: The present invention is a system of symmetric guides (25A, 25B) and baffles (26, 28) for directing and diffusing the external air drawn from a fan blower (12) before distributing the flow evenly to the outlet of a fan filter unit (32). This arrangement not only reduces the turbulence and minimizes pressure loss within a fan filter unit (32) but also maintains the even distribution of air when discharged through the same system. Furthermore, the present invention is implemented in dimensions substantially similar to that of the fan blower (12) in terms of heights. As such, the present invention minimises noise of a fan filter unit (32) even in low clean room ceiling height. Finally, the present invention's guides (25A, 25B) and baffles (26, 28) are symmetrical surrounding the fan blower (12), which allows either the clockwise fan or the anti-clockwise fan to be used for the same fan filter unit (32) for user's convenience.

WO 01/23764 A1