



(43) International Publication Date
31 October 2013 (31.10.2013)

- (51) International Patent Classification:
D07B 1/06 (2006.01)
- (21) International Application Number:
PCT/EP2013/057834
- (22) International Filing Date:
15 April 2013 (15.04.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
12165260.6 24 April 2012 (24.04.2012) EP
- (71) Applicants: **NV BEKAERT SA** [BE/BE]; Bekaertstraat 2, B-8550 Zwevegem (BE). **DSM IP ASSETS B.V.** [NL/NL]; Het Overloon 1, NL-6411 TE Heerlen (NL).
- (72) Inventors: **AMILS, Xavier**; President Rooseveltplein 16A, Bus 12, B-8500 Kortrijk (BE). **DURMUS, Beste**; Koolstraat 34/11, B-1000 Brussel (BE). **SMEETS, Paulus Johannes Hyacinthus Marie**; Steegske 7, NL-6243 AK Geule (NL).
- (74) Agent: **MESSELY, Marc**; Bekaertstraat 2, B-8550 Zwevegem (BE).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

Published:

— *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*

(54) Title: MULTI-STRAND HYBRID ROPE

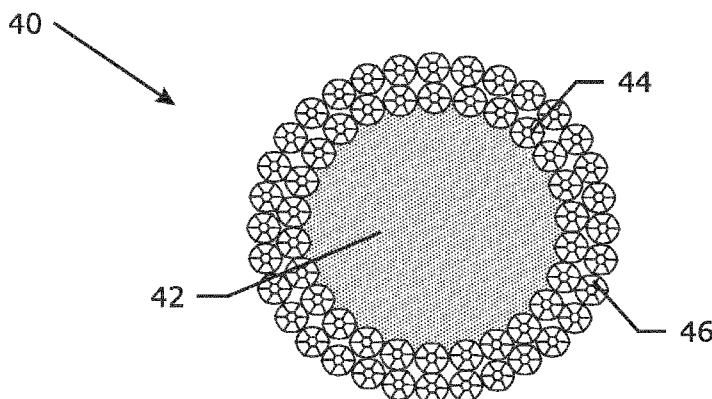


Fig. 4

(57) Abstract: The invention relates to a hybrid rope comprising a core element, a first and a second metallic closed layer surrounding said core element. The core element includes a bundle or construction of synthetic yarns. The first metallic closed layer includes a plurality of first wirelike members helically twisted together with the core element in a first direction. The second metallic closed layer includes a plurality of second wirelike members helically twisted together with said core element and said first metallic closed layer in a second direction. The cross-sectional area of the core element is larger than the total cross-sectional area of the first and second metallic closed layers.

