




- (51) **International Patent Classification:**
H04W 36/00 (2009.01) *H04W 84/06* (2009.01)
G01S 19/25 (2010.01)
- (21) **International Application Number:**
PCT/EP2023/074905
- (22) **International Filing Date:**
11 September 2023 (11.09.2023)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
20225862 29 September 2022 (29.09.2022) FI
- (71) **Applicant:** NOKIA TECHNOLOGIES OY [FI/FI];
Karakaari 7, 02610 Espoo (FI).
- (72) **Inventors:** MEDEIROS DE AMORIM, Rafael; Thors-
gade 28, 9000 Aalborg (DK). LAURIDSEN, Mads;
Norgårdsvej 4B, 9260 Gistrup (DK). PORTELA LOPES
DE ALMEIDA, Erika; Leharparken 70, 9200 Aalborg
(DK).
- (74) **Agent:** NOKIA EPO REPRESENTATIVES; Nokia
Technologies Oy, Karakaari 7, 02610 Espoo (FI).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, CV, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:
— with international search report (Art. 21(3))

(54) **Title:** MANAGING OF SATELLITE ASSISTANCE INFORMATION DURING HANDOVER PROCEDURE

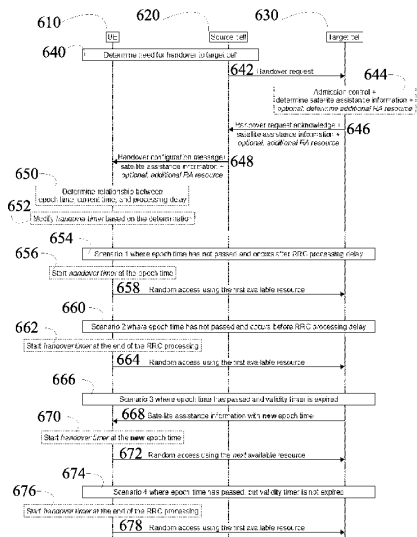

(57) **Abstract:** There is provided an apparatus comprising: at least one processor; and at least one memory storing instructions that, when executed by the at least one processor, cause the apparatus at least to perform: receiving, from a serving cell, a configuration message for a handover to a target cell associated with a different satellite assistance information than satellite assistance information associated with the serving cell, wherein the configuration message is indicative of at least: the satellite assistance information associated with the target cell; and a validity timer for defining validity of at least part of the satellite assistance information; wherein the satellite assistance information comprises at least: an epoch time and corresponding satellite assistance information, which is to be applied after reaching the epoch time; determining, based on at least the epoch time, whether to modify a handover timer and/or one or more requirements on handover completion.

Fig. 6